



Austin 1200w LED Floodlight



Introducing the Austin LED commercial floodlight range

A trunnion mounted general purpose floodlight offering an IP65 rating and the capability to withstand operating conditions of -40° to +40°

Application

Available in a wide range of wattages and beam optics, the Austin LED floodlight range is suited to:

- ◆ Industrial area lighting
- ◆ Commercial applications
- ◆ General purpose floodlight applications

Design Specifications

- Die-cast aluminium body with a galvanised steel trunnion arm powder coated in black
- 8 distribution optics available - both symmetric and asymmetric
- High efficacy >160lm/w in 5000K as standard, 4000K and 6500K available upon request
- UV stabilised polycarbonate diffuser, CRI70 as standard
- Integrated control gear, fixed output as standard

Available Options

- 1-10v & DALI dimming models
- CRI 80
- 4000K, 6500K CCT
- Anti-corrosive finish
- Stainless steel bracket
- Custom powdercoat finish colour





Model No. & Technical Specification


Model No.	Description	Power (W)	Lumens (lm)	CCT (K)	CRI
FAN120050NS1	Trunnion mount LED floodlight 20° deg symmetrical optic	1280	201000	5000	70
FAN120050NS2	Trunnion mount LED floodlight 30° deg symmetrical optic	1280	209000	5000	70
FAN120050NS3	Trunnion mount LED floodlight 60° deg symmetrical optic	1280	205000	5000	70
FAN120050NT1	Trunnion mount LED floodlight type 1 asymmetrical optic	1280	205000	5000	70
FAN120050NT2	Trunnion mount LED floodlight type 2 asymmetrical optic	1280	212000	5000	70
FAN120050NT3	Trunnion mount LED floodlight type 3 asymmetrical optic	1280	208000	5000	70
FAN120050NT4	Trunnion mount LED floodlight type 4 asymmetrical optic	1280	205000	5000	70
FAN120050NT5	Trunnion mount LED floodlight type 5 asymmetrical optic	1280	210000	5000	70



Due to continued product and technology enhancements, data sourced from salcommercial.net.au shall not form part of any contract and or performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Commercial Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish.



Dimensions

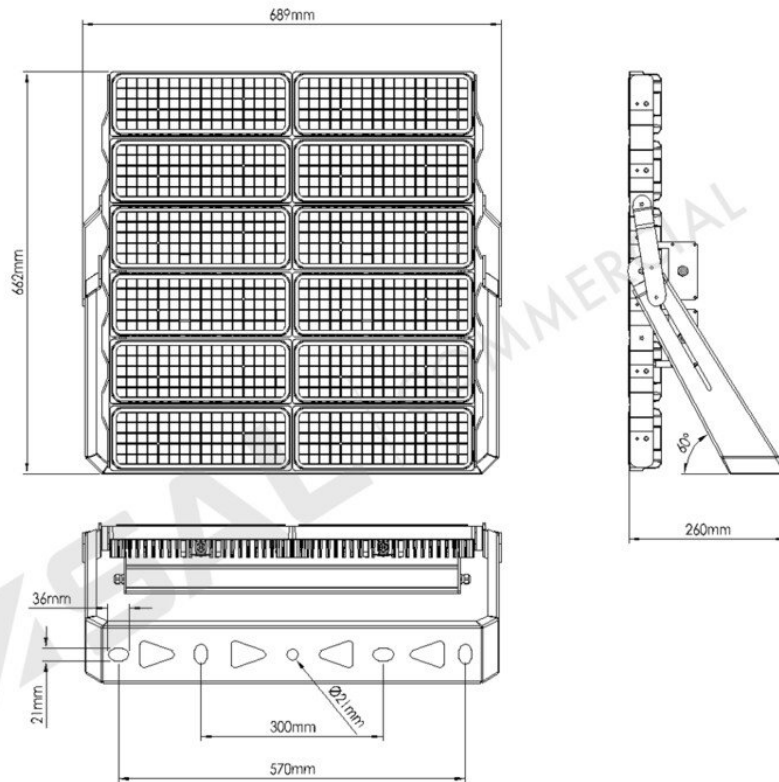

Austin 1200w

Photometric Data

