



PROVEN PERFORMER

Vended Laundry

SWNNX2 (top loading washer)

SDENXR (electric dryer), SDGNXR (gas dryer)

Top loading washer features

- 710 rpm spin speed among the highest in the industry
- Curved four-vane agitator delivers an industry-best 210° stroke
- Exclusive stainless steel tub with a lifetime warranty helps protect against pulls, snags or frayed clothes
- Fast cycle times
- Commercial all metal transmission offers highest quality and durability
- Single slot electronic multi denomination coin drop for versatility and accuracy
- Digital display with countdown

Dryer features

- Durable galvanized steel cylinder with an extra-large 198 litres of volume
- Efficient dryer heating with 27 MJ (gas models) and up to 4,000 Watts (electric models)
- Extended Tumble helps eliminate wrinkling by tumbling for two minutes at 20 minute intervals if the dryer door isn't opened decreasing fire risk
- Quiet, efficient blower system uses a superior airflow of 5100 litres per minute for fast efficient drying
- 1913.8 sq. cm door opening is the largest in the industry, providing easy loading and unloading for customers
- Large capacity, full load from washer
- Reversible door



EASY OPERATION




STAINLESS STEEL WASHER DRUM



LARGE DOOR OPENING



LOW ENERGY CONSUMPTION



ROBUST DESIGN




Controls

Quantum™ Gold

In addition to its network capabilities and remote off-site management features, Quantum™ Gold offers additional owner and customer benefits such as PC programming and machine audit capabilities, as well as time-of-day pricing, a "lucky cycle" for loyal customers and the ability to interface with the store owner's payment systems. Cycle modifier keys create additional profit opportunities for store owners.

Options

- Cashless Payment by Credit Card Activation
- Replaces Coin Mech - Coin Box
- Speed Queen Insights Network
- Insights Gateway and Subscription
- Cashless APP Payment and Equipment Management online.

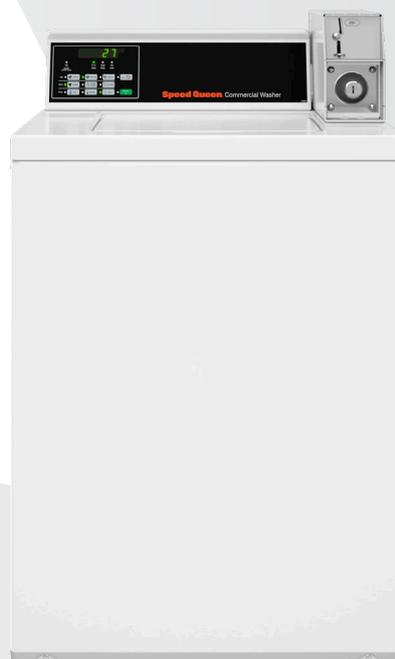

SWNNX2



SDENXR, SDGNXR


| | SWNNX2 | SDENXR (Electric) SDGNXR (Gas) |
|---|-----------------------|---------------------------------------|
| Type | Top Loading Washer | Single Dryer |
| Control | Quantum Electronic | Quantum Electronic |
| Control location | Rear | Rear |
| Drum | | |
| Capacity kg (Industry rated) | 8 kg | 9 kg |
| Cylinder volume litres | 92.3 Lt | 198 Lt |
| Drum speed | | |
| Spin speed G-Force | 150 | n/a |
| Spin speed rpm | 710 | n/a |
| Motor | | |
| Motor size kW | 0.37 | 0.25 |
| Cabinet | | |
| Cylinder finish | Stainless steel | Galvanized |
| Colours | White | White |
| Door type (solid/window) | n/a | Solid |
| Heating | | |
| Heat sources | n/a | Electric or Natural Gas, LPG optional |
| Heating element (Electric W) | n/a | 4000 |
| Connection | | |
| Gas inlet connection mm | n/a | 9.5 |
| Gas consumption MJ/Hr | n/a | 27 MJ |
| Exhaust outlet dia. mm | n/a | 102 |
| Exhaust airflow litres/sec | n/a | 85 |
| Water temperatures | 3 | n/a |
| Operation | | |
| Cycles* | Up to 30 programmable | High, Medium, Low, Delicates, No Heat |
| Water consumption per cycle litres* | 93.0 | n/a |
| Water pressure kPa | 140/830 kPa | n/a |
| Cycle indicator lights | Digital display | Digital display |
| Power | | |
| Electrical requirements (voltage/Hz/Ph) | 240/50/1, 6 amp | 240/50/1, Elec 20 amp, Gas 4 amp |
| Transport data | | |
| Net weight kg | 86 | Electric/Gas 61/64 |
| Shipping weight kg | 95 | Electric/Gas 66/68 |
| Dimensions H×W×D mm | 1092×650×711 | 1092×683×711 |
| Packing dimensions H×W×D mm | 1124×699×762 | 1156×737×832 |
| Agency approvals | | |
| Available agency approvals | SAA Electrical | SAA Electrical, AGA #4945 Gas |

Options:

- Front Mounted CARD ACTIVATION TERMINAL - Cashless Payment Solution (ADVAM) (T&C Apply) Three way (TAP & GO , EMV chip and Magstripe) transactions on each washer while respecting security standards and improving customers interactivity. With this no CVM (Cardholder Verification Method) solution, transactions are simpler and faster. ** CAT 5 connection required - (replaces Coin Drop)




- Quantum Insights Network Controllers and Internet Gateway. (T&C Apply)

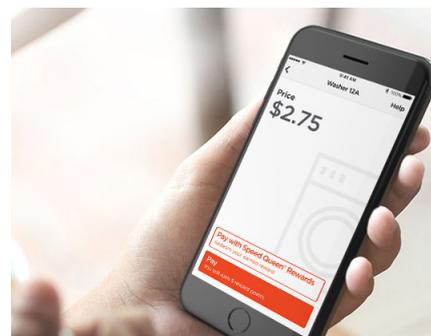

Dimensions

Top Loading Washer


| | A | B | C* | D | E | F | G | H | I | J | K | L |
|--------|-----|------|------|-----|-----|-----|----|-----|------|-----|-----|-----|
| SWNNX2 | 570 | 1295 | 1114 | 970 | 711 | 660 | 11 | 914 | 1048 | 730 | 651 | 775 |

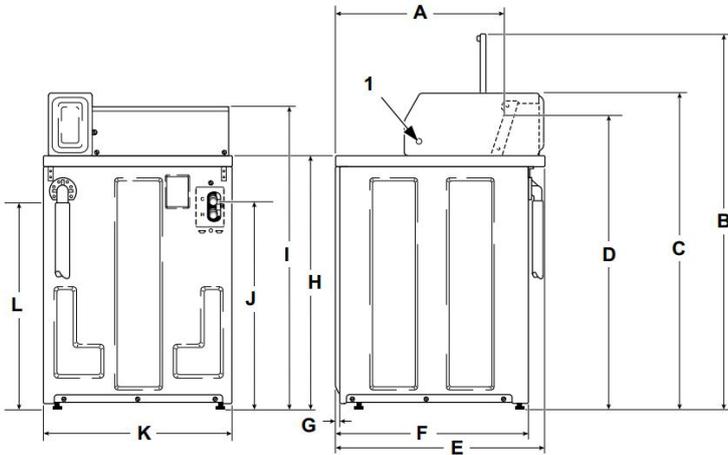

C* - High Capacity Meter Case 1114mm (Standard 1092mm)
 All measurements are in mm. *With levelling legs turned into base.

Electric Dryer


| | A ¹ | A ² | B ¹ | B ² | C | D | E | F | G | H | I | J | K | L | M |
|--------|----------------|----------------|----------------|----------------|-------|------|------|-----|-----|------|------|----|-----|-----|-----|
| SDENXR | 548 | 560 | 1020* | 970 | 1097* | 392* | 102* | 391 | 683 | 914* | 114* | 10 | 203 | 711 | 597 |

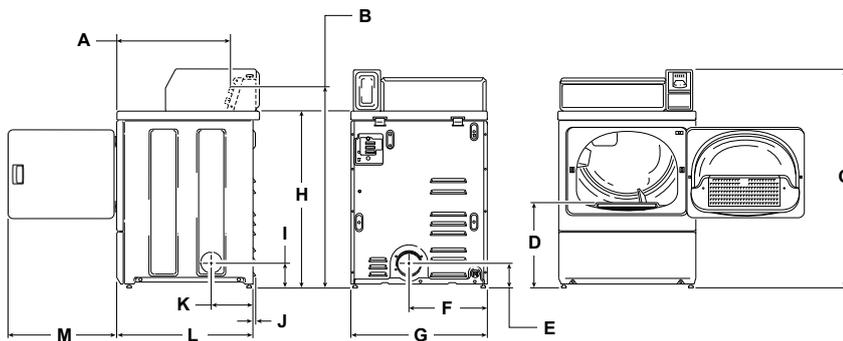

All measurements are in mm. *With levelling legs turned into base.
 NOTE: Exhaust openings are 102 mm metal ducting. Gas models cannot be vented out left side of cabinet because of burner housing.
 IMPORTANT: The dryer should have sufficient clearance around it for needed ventilation and for the ease of installation and servicing. For maximum drying performance, we recommend that more clearance be allowed around the dryer than the minimum indicated.

Gas Dryer

| | A ¹ | A ² | B ¹ | B ² | C | D | E | F | G | H | I | J | K | L | M | N | O |
|--------|----------------|----------------|----------------|----------------|-------|------|-----|----|-----|-----|------|------|------|----|-----|-----|-----|
| SDGNXR | 548 | 560 | 1020* | 970 | 1097* | 392* | 70* | 60 | 391 | 683 | 102* | 914* | 114* | 10 | 203 | 711 | 597 |

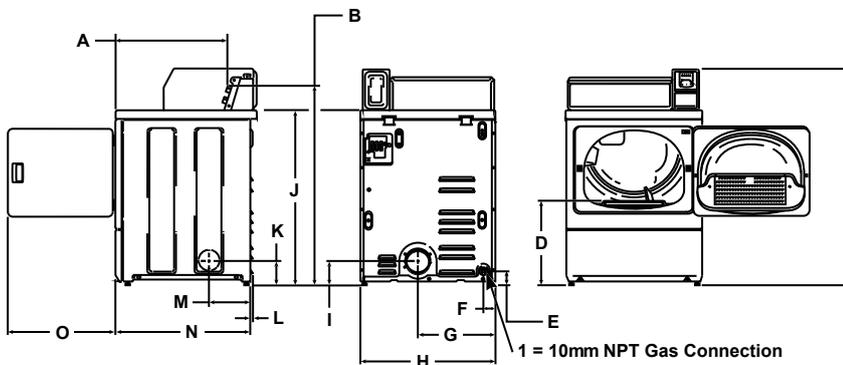

NOTE: Gas models cannot be vented out left side of cabinet because of burner housing.
 IMPORTANT: The dryer should have sufficient clearance around it for needed ventilations and for the ease of installation and servicing. For maximum drying performance, we recommend that more clearance be allowed around the dryer than the clearances that are listed here.

1 = 10mm NPT Gas Connection



Andrew Barton Laundry Systems.
67 Colebard Street West, Acacia Ridge,
QLD 4110
Ph: +61 7 3716 1333
Fax: +61 7 3716 1398
W: www.andrewbarton.com.au
E: info@andrewbarton.com.au
Servicing Queensland.