
# eATM tManager<sup>®</sup> for ControlLogix<sup>®</sup>

### Connect ControlLogix PLCs to analytics and dashboards in about 10 minutes

- Collect information from islands of PLCs and connect natively upstream to SQL databases and cloud for analytics, dashboards, and process optimization
- In-chassis PLC module, no PC in the middle, no coding, no OPC translation
- Most direct method to connect PLCs (OT) directly to IT business apps for analytics, dashboards, and digital transformation

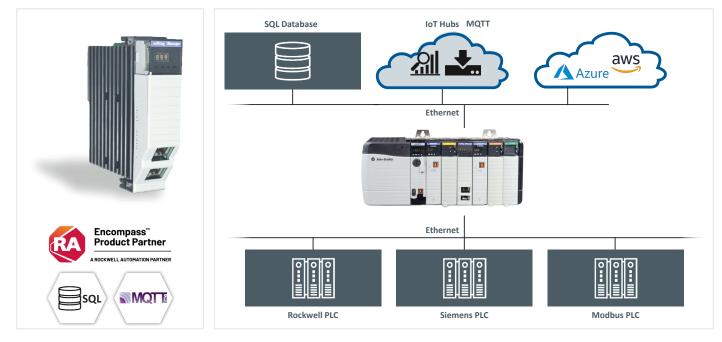

#### **Easy and Fast PLC Connectivity to Analytics**

tManager digital transformation solution enables PLCs to connect to IT dashboards, analytics, business metrics, or applications like track & trace, high speed sorting, and recipe management to optimize business processes No coding, no PC in the middle, no OPC protocol translation. Just easy-to-use menu-driven selections.

#### Natively browse Logix tags and natively connect to SQL, ORACLE, AWS using AWS IOT core, and AZURE using IOT Hub

- Collect data from Rockwell, Siemens or Modbus controllers, then connect upstream to analytics
- Access all leading cloud platforms using MQTT

#### **Rock Solid Security**

- In-chassis module, no anti-virus updates, no security patches
- Configure with software, then disconnect software during runtime
- No access to SQL code, so editing and creation of malicious SQL commands not possible
- Support for AWS and Azure certificates and SQL encryption

#### **Robust Data Handling**

- In-chassis industrial PLC module that's built for the OT environment, and replaces the PC that's not
- No need to modify PLC logic to read tags such as monitoring key performance indicators
- Eliminate data loss through use of store and forward (local buffering) and redundancy using failover server
- Time-stamped data and logs saved of all transactions for audit
- E-mail notifications, Logix status tags, for transaction status and system operation



## eATM tManager for ControlLogix

Technical Da	ata	
Hardware	Connectors	2 x Ethernet ports (independent hardware interfaces)(10M/100M/1G)
	Power Consumption	5 VDC, 7 W
		(power supply through ControlLogix PLC backplane)
	Temperature	0 °C 60 °C (operating)
	- 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1	0 °C 80 °C (non-operating)
	Relative Humidity	5 % 95 %, non-condensing
	Mounting	ControlLogix single-slot module
	Vibration	2 g @ 10 - 500 Hz
	Shock	30 g (operating) 50 g (non-operating)
	Memory	7 GB onboard memory (for Store and Forward if database connectivity is lost)
	Status Tags	eATM tManager for ControlLogix health, Store and Forward state, successful
	Logging	transaction, complete transaction handshaking
Managar	Logging	Transactions, alarms/alerts, performance
tManager connections via Ethernet port	SQL Database Connectors Cloud Connector	Microsoft SQL, Oracle, MySQL, AS/400 IBM DB2 (select up to 2)
	Additional Connectors	MQTT option supports topic publish/subscribe and includes AWS IoT Core and Azure IoT Hub connectors
	Additional Connectors	Siemens SIMATIC S7 (for collecting islands of Siemens SIMATIC S7 PLCs and connecting directly to the SQL databas Modbus TCP (for collecting islands of Modbus PLCs and connecting directly to the SQL database)
	Communications Adapters	TCP/UDP, FTP, e-mail notification (SMTP outbound included with all adapters)
	Supported Controllers	Rockwell Allen-Bradley ControlLogix, CompactLogix, PLC-5, SLC500, MicroLogix 1100, Micrologix 1500
	(collect tags from a max	over Ethernet/IP, DH+, DH485 and ControlNet (via ControlLogix bridge module)
	of 16 controllers, no tag	Siemens SIMATIC S7-300, S7-400, S7-1200, S7-1500 over Industrial Ethernet
	limit) Database Functions	Modbus TCP-compatible controllers (Schneider Electric, Wago, Beckhoff, Phoenix Contact, etc.) Insert, Update, Select, Stored Procedures
Certifications	CE, RoHS	insert, opuale, select, stoled Plocedules
Scope of De	livery	
Hardware		eATM tManager for ControlLogix, in-chassis module
Software		For initial module configuration and communication status only (software is not used for transactions)
Documentation	n	Quick Startup Guide
Order Numb	pers	
56EATM-TMG	r b MSSQL	eATM tManager for ControlLogix with MSSQL adapter (including CLX BP driver) Series B
56EATM-TMGR_B_MSSQL 56EATM-TMGR_B_ORACLE		eATM tManager for ControlLogix with ORACLE adapter (including CLX BP driver) Series B
56EATM-TMGR_B_ORACLE 56EATM-TMGR_B_MSSQL_ORACLE		eATM tManager for ControlLogix with MSSQL and ORACLE adapters (including CLX BP driver) Series B
56EATM-TMGR_B_MYSQL		eATM tManager for ControlLogix with MYSQL Aadapter (including CLX BP driver) Series B
56EATM-TMGR_B_AS400_DB2		eATM tManager for ControlLogix with AS400/Series i DB2 adapter (including CLX BP driver) Series B
56EATM-TMGR_B_MQTT		eATM tManager for ControlLogix with MQTT adapter (includes CLX BP driver, AWS and Azure connector) Series B
56EATM-TMGF	R_B_FTP	eATM tManager for ControlLogix with FTP adapter (including CLX BP driver) Series B
Additi <u>onal P</u>	Products and <u>Services</u>	
Additional Products and Services 56EATM-TMGR_B_MODBUS-TCP		MODBUS-TCP/IP driver support for eATM tMANAGER product Series B
56EATM-TMGR_B_S7_ADAPTER		Siemens SIMATIC S7 driver support for eATM tMANAGER product Series B
56EATM-TMGR_B_SPARE		eATM tManager for ControlLogix with configuration software and no licenses installed
56EATM_TMGR_B_MSSQL_ADPT		Additional MSSQL adapter support for eATM tManager product Series B (for existing module with one standard adap
56EATM_TMGR_B_ORACLE_ADPT		Additional ORACLE adapter support for eATM tManager product Series B (for existing module with one standard ada
56EATM-TMGR_B_MQTT_ADPT		Additional MQTT adapter support for eATM tManager product Series B (for existing module with one standard adapter support for eATM tManager product Series B (for existing module with one standard adapter support for eATM tManager product Series B (for existing module with one standard adapter support for eATM tManager product Series B (for existing module with one standard adapter support for eATM tManager product Series B (for existing module with one standard adapter support for eATM tManager product Series B (for existing module with one standard adapter support for eATM tManager product Series B (for existing module with one standard adapter support for eATM tManager product Series B (for existing module with one standard adapter support for eATM tManager product Series B (for existing module with one standard adapter support for eATM tManager product Series B (for existing module with one standard adapter support for eATM tManager product Series B (for existing module with one standard adapter support for eATM tManager product Series B (for existing module with one standard adapter support for eATM tManager product Series B (for existing module with one standard adapter support for eATM tManager product Series B (for existing module with one standard adapter support for eATM tManager product Series B (for existing module with one standard adapter support for eATM tManager product Series B (for existing module with one standard adapter support for eATM tManager product Series B (for existing module with one standard adapter support for eATM tManager product Series B (for existing module with one standard adapter support for eATM tManager product Series B (for existing module with one standard adapter support for existing module with one stand
56EATM-TMG	R_B_TCP_UDP_ADPT	Additional TCP/UDP adapter support for eATM tManager product Series B (for existing module with one std adapt
ease contact the S	Softing sales representative if your requ	
Your local Softing	g contact:	https://industrial.softing.com/us

