

PG250 Series Gas Burner



PG250 Gas Burner features:

- Available configured for Natural Gas, LPG or Biogas - other gases on request
- Applications include steam and high pressure hot water boilers, as well as more diverse processes such as rotary dryers
- Separate floor-mounted combustion air fan unit or monoblock design
- Fully modulating operation as standard
- Microprocessor based Autoflame burner management (Siemens LMV5 or ETC option) with servo motor fuel/air ratio management for up to 7:1 turndown
- Integrated PID control for accurate response to demand
- Optional Extras:
 - Exhaust gas analysis for passive monitoring of emissions
 - Oxygen trim for improved emissions control
 - Variable speed drive combustion fan for improved electrical efficiency
 - Air inlet silencer (<85 dBA)
 - Simple sliding high / low control (Siemens LFL1)
 - Separate or integrated water level controls for steam boiler
 - Data Transfer Interface
 - Low NOx head design (<80mg/kWh)*
- Optional air and gas handing configurations available to suit appliance
- All kW ratings in net CV




For more information on all Nu-way products
please visit www.nu-way.co.uk

Model PG		250/5.1	250/5.5	250/6.0	250/6.2	250/6.6	250/7.0	250/7.3
Output (nett CV)	MW	4.6	5.0	5.4	5.6	5.9	6.3	6.6
Fan Size	kW	15	15	15	15	15	15	15
Electrical Supply	V/Hz	400/50	400/50	400/50	400/50	400/50	400/50	400/50
Gas train inlet conn.		PN16 DN80	PN16 DN80	PN16 DN80	PN16 DN80	PN16 DN80	PN16 DN80	PN16 DN80
Gas train size		3"	3"	3"	3"	3"	3"	3"
Gas inlet pressure (min/max)	mbar	140/300	140/300	140/300	140/300	140/300	140/300	140/300
Operation		Fully Modulating	Fully Modulating	Fully Modulating	Fully Modulating	Fully Modulating	Fully Modulating	Fully Modulating
Control Unit		Autoflame Mini Mk8	Autoflame Mini Mk8	Autoflame Mini Mk8	Autoflame Mini Mk8	Autoflame Mini Mk8	Autoflame Mini Mk8	Autoflame Mini Mk8
Turndown		up to 7:1	up to 7:1	up to 7:1	up to 7:1	up to 7:1	up to 7:1	up to 7:1
Flame Monitor		UV Sensor	UV Sensor	UV Sensor	UV Sensor	UV Sensor	UV Sensor	UV Sensor
Flame tube lengths	mm	430/610	430/610	430/610	430/610	430/610	430/610	430/610
Noise @ 1m	dBA	93 <85 with silencer	93 <85 with silencer	93 <85 with silencer	93 <85 with silencer	93 <85 with silencer	93 <85 with silencer	93 <85 with silencer
NOx	mg/kWh	140-190*	140-190*	140-190*	140-190*	140-190*	140-190*	140-190*
CO	mg/kWh	<100	<100	<100	<100	<100	<100	<100

Information for standard design and subject to change.

* Low NOx head design <80 mg/kWh (gas) is subject to suitable combustion chamber design

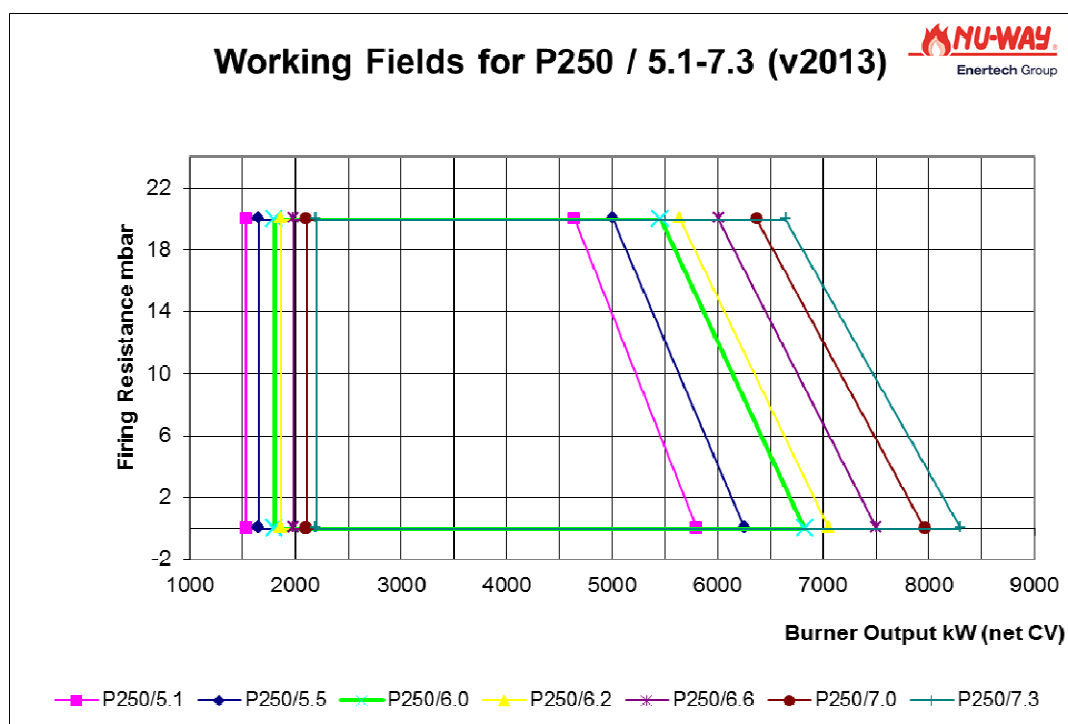

BURNER DESIGNATION

PGN 250/5.1 LN MM3NA 610

P = Burner Series

G = Gas

N = Natural Gas, T = Towns Gas

250 = Casing Size

5.1 = Maximum Output MW (GCV)

LN = Low NOx head design

MM = Micro Modulation Control

3 = 3 Phase Electrical Supply

N = No Control Junction Box on Burner

A = Autoflame Burner Programmer, L = Siemens LMV5

610 = 610mm Flame Tube Projection

Enertech Limited, Ten Acres, Berry Hill Industrial Estate,
Droitwich, Worcestershire, WR9 9AQ

tel: +44 (0) 1905 794331 • fax: +44 (0) 1905 794017
email: info@nu-way.co.uk • web: www.nu-way.co.uk



Enertech Group

Issue 08/15