




Notes (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. Recommend Panel Thickness: 0.8 to 6.0 mm.
3. Recommend Torque: 14~15 Kgf-cm.
4. Mating Cap P/N:125-7929
5. RoHS Compliant.


REV	ECNR	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A2	ECN-140895	Modify Item 2, Shrink Tube L=10mm to 20mm	Joyce 08/07/14	Lucas 08/07/14	Roy 08/07/14

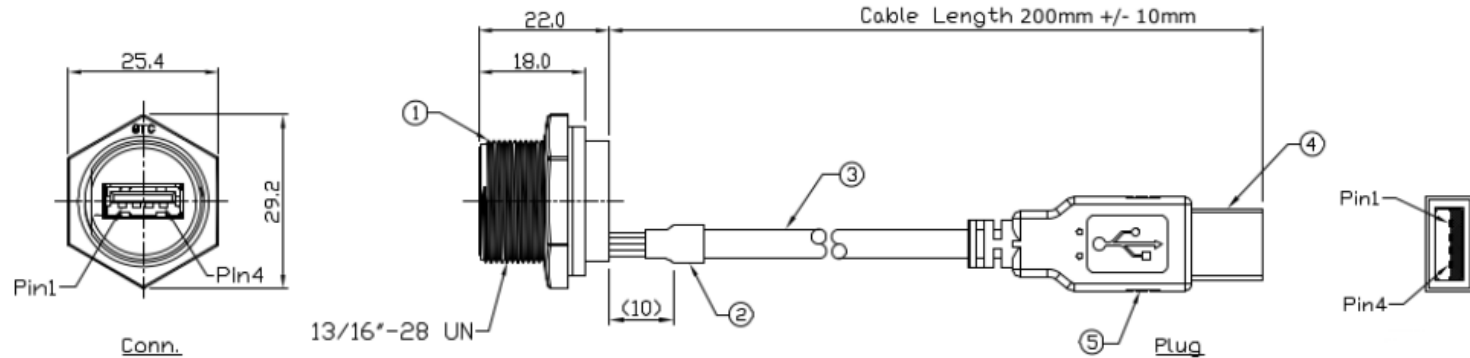

5	Over Mold	PVC Color: Black	1
4	USB-A Plug	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Cold Roll Steel, Finish: Ni Plated	1
3	Cable	UL2725 1P*28AWG+2C*24AWG+AI/My+I+I OD=5.0mm, Color: Black	1
2	Shrink Tube	L=20mm Color: Black	1
1		USB-A Plastic C3 Panel Jack Screw With Pig Tail	1
Item	Part Name	Material / Finish	Qty



Wiring Diagram



Recommend Panel Cut-Out

Mating Part:
111-6758

RS Stock No
111-6761

TITLE							RS Stock No		
USB-A Plastic C3 Panel Jack Screw With Cable + USB-A Plug							111-6761		
	B	1:1	Joyce 06/28/11	Lucas 06/28/11	Roy 06/28/11	XX ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	MM	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET	