

REVERSING ALARMS

- 160 Plastic housing: Nylon plus 30% fiber
- 170 and 180 Plastic housing: Nylon plus 33% fiber
- 160 Series with earthing strap
- 170 and 180 Series without earthing strap
- Operating temperature: -40 to 85°C
- IP66 Rated - splash and dust proof



PART NO.	SOUND CYCLE	FREQUENCY	CURRENT DRAW @ 12V	OPERATING VOLTAGE	DIMENSIONS
160B-97	60 - 65 Pm	1250 - 1300Hz	0.2 Amps	12 - 80 VDC	102mm (L) 41mm (W) 70mm (H)
160B-102			0.25 Amps		
160B-107			0.4 Amps		
160B-112			0.5 Amps	12 - 24 VDC	


PART NO.	SOUND CYCLE	FREQUENCY	CURRENT DRAW @ 12V	OPERATING VOLTAGE	DIMENSIONS
170B-112	60 - 65 Pm	1250 - 1300Hz	0.5 Amps	12 - 24 VDC	128mm (L) 95mm (W) 78mm (H)
170B-94-112	60 - 65 Pm	1200 - 1400Hz	0.2 - 0.7 Amps		
170B-112FA	Continuous	1200 - 1400Hz	0.8 Amps		



PART NO.	SOUND CYCLE	FREQUENCY	CURRENT DRAW @ 12V	OPERATING VOLTAGE	DIMENSIONS
180B-87-112	60 - 65 Pm	1200 - 1400Hz	0.2 - 0.8 Amps	12 - 24 VDC	95mm (L) 175mm (W) 80mm (H)



TECHNICAL DRAWING

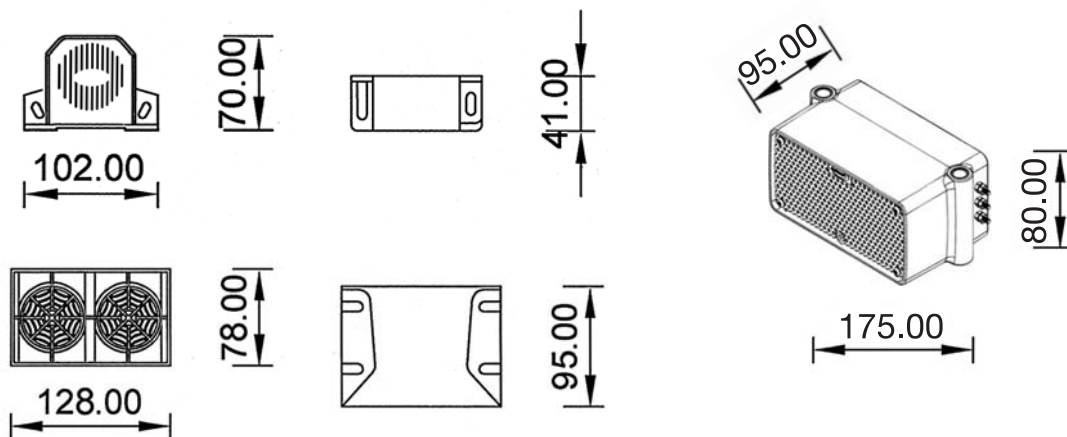

© ACOT500®