


MDE/MDG20MN SUPER-CAPACITY DRYER



TURBOVENT™ TECHNOLOGY

- Engineered with an extra blower wheel for exceptional performance in long-vent applications.
- Provides efficient drying and boosts productivity.




EXTRA-LARGE CAPACITY

- 9kg. capacity allows for large loads to be dried effectively and efficiently.
- Optimal drying experience maximizes facility productivity.



EASY-TO-USE CONTROLS

- Mechanical controls provide a simple user interface with robust, easy-to-use knobs.




FOUR ROLLER SUSPENSION WITH PERMANENTLY LUBRICATED BEARINGS

- Designed to provide consistent and dependable drying, cycle after cycle.



PORCELAIN-ENAMEL TOP

- Possesses the strength and craftsmanship required for the traffic of a commercial laundry environment.
- Boosts durability and aesthetics.




FRONT ACCESS PANEL

- Easy to remove, streamlining service by providing fast access to internal components.



EXTRA-LARGE REVERSIBLE DOOR

- Provides users unhindered access while loading and unloading clothes.
- Offers convenience and optimal flexibility for a given space.



DEPENDABLE
LAUNDRY SOLUTIONS

Visit Dependablelaundry.com.au or call **1800 629 824**

OUR COMMITMENT TO DEPENDABLE QUALITY


We understand what dependability means to your owners. That's why we use sturdy components and engineer our products to withstand tough commercial laundry environments for years. Our machines deliver consistent results, powerfully cleaning loads of varying sizes with ease. And because we trust our machines to perform, we back them with exceptional warranties. That's what reliability means to Maytag.

MAYTAG® COMMERCIAL SUPER-CAPACITY DRYER MECHANICAL CONTROLS, NON-COIN


MDE/MDG20MN SUPER-CAPACITY DRYER



| DRYER SPECIFICATIONS | |
|--|-----------------|
| MODEL | MDE/MDG20MNA GW |
| MOTOR SIZE—HP (KW) | 1/3 (.25) |
| AIRFLOW—CFM MDE/MDG MODEL | 215/230 |
| ELECTRIC HEATING ELEMENT (WATTS) | 4,600 |
| GAS RATING—BTU/HR. (KCAL/HR.) | 20,000 (5,040) |
| GAS INLET SIZE | 3/8 N.P.T. |
| CAPACITY | |
| Cylinder volume—cu. ft. (liters) | 210 |
| Cylinder diameter—mm | 667 |
| Cylinder depth—mm | 590 |
| DIMENSIONS | |
| Width—mm | 686 |
| Depth—mm | 743 |
| Height—mm | 1,042 |
| Door opening—mm | 514 |
| Exhaust duct diameter—in. (mm) | 4 (101.6) |
| CRATED DIMENSIONS | |
| Width—mm | 731 |
| Depth—mm | 782 |
| Height—mm | 1,134 |
| APPROXIMATE WEIGHT | |
| Uncrated—kg | 57.6 |
| Crated—kg | 62.1 |
| ELECTRICAL REQUIREMENTS | |
| Electrical rating—voltage/HZ | 220–240V/50Hz |
| Breaker/Fuse—amps MDE20MN model | 25amp |
| Breaker/Fuse—amps MDG20MN GAS model | 10amp |
| Dimensions are for planning purposes only. See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice. | |

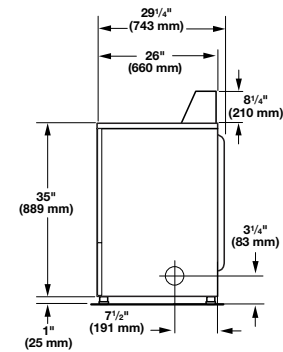

Side View

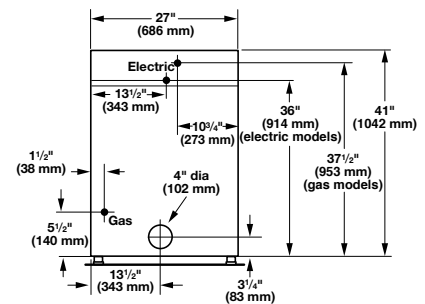

Back View



5-YEAR LIMITED WARRANTY ALL PARTS COVERED

See maytagcommerciallaundry.com for complete warranty details.

MAXIMUM EXHAUST DUCT LENGTH PER NUMBER OF TURNS

| Number Of 90° Turns | Rigid Metal Vent | |
|------------------------|--------------------------------|----------------------|
| | Box Hood and Louvered Style | Angled Hood Style |
| 0 | 135 ft. (41.2 m) | 129 ft. (39.3 m) |
| 1 | 125 ft. (38.1 m) | 119 ft. (36.3 m) |
| 2 | 115 ft. (35.1 m) | 109 ft. (33.2 m) |
| 3 | 106 ft. (32.3 m) | 100 ft. (30.5 m) |
| 4 | 98 ft. (29.9 m) | 92 ft. (28.0 m) |

Available Australia Wide from:



DEPENDABLE LAUNDRY SOLUTIONS