

# Easy Load, Easy Lift!

*\*Powered Lifter!*



CA400 Stowed

Spec / Model	CA-400
Voltage	220V
Basic height	96 CM
Lifting height	396 CM
Load Capacity- Standard Platform	150 KG
Load Capacity- Optional Cradle	120 KG
Operate dimension	101 x 97CM
Machine weight	66 KG

*\*Specifications subject to change without notice.*




CA400 with optional  
Glass Cradle

**\*With the Glass Cradle, the Super Lifter is ideal for the manipulation and installation of glass panels up to heights of 4 meters.**



## Optional Glass Cradle

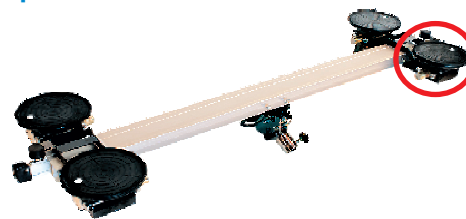

## Optional Glass Cradle

- ◆ Safety Suction Pump, Diameter 200 mm (certified by TÜV and GS)
- ◆ Red line on plunger indicates vacuum seal.
- ◆ Designed for overhead and vertical installations and repairs, angle adjustment up to 90°.
- ◆ Two extension arms for glass panels up to 4 m.

## Adjustable legs!




Standard Leg Configuration.



Flat Leg Configuration - For  
operating adjacent to a wall.

Using the Standard Platform, the Super Lifter is a multi-purpose lifter for air conditioners, awnings, garage doors and more...


### Standard Platform

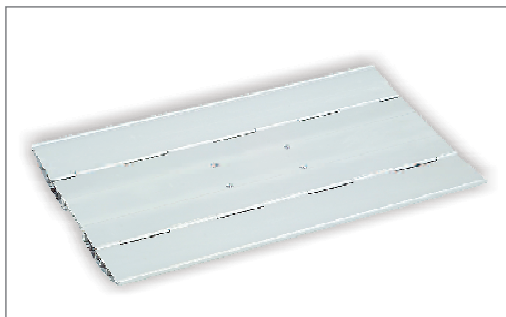

CA400 with standard Platform

### OPTIONAL ACCESSORY:

1.Out-trigger for Awning Installations.

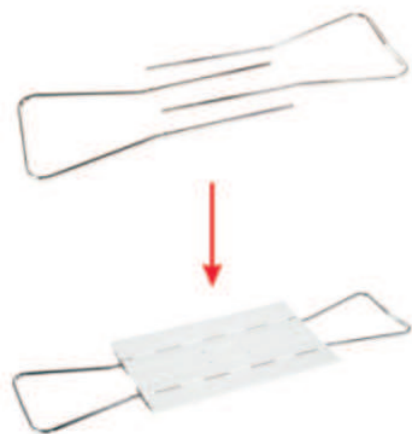

2.Flat leg configuration for working adjacent to a wall.



**Hand-Held Controller**  
Variable speed with belt clip.

**Emergency Stop Button**  
Switches to manual operation.

**Manual Operation**  
For locations with no mains power.

**Level**  
Equipped to help ensure proper set up.

### Small and Compact Lifter - only 96cm Loading Height!



CA400 Stowed



CA400 with optional Glass Cradle

1. **Compact and Manoeuvrable** - Loading height of only 96cm.
2. **Electric Motor** - Variable speed controller with long cable and belt clip
3. **Adjustable legs** - Use lifter on uneven surfaces and adjacent to walls.
4. **Level** - Ensure mast is vertical before operation.
5. **Telescoping Mast** - Compact, Strong and Light - made with robust, specially heat treated aluminium.
6. **Manual Controls** - If no mains power available, use cordless drill or handle to operate lifter.
7. **Emergency Stop Button** - Also safety interlock switch for manual control.
8. **Setup in 30 seconds** - No tools required.
9. **Overload Cut-Out** - Fitted with overload clutch for safety.
10. **Wheels for Mobility** - Fitted with 5" castors for easy transportation and manoeuvrability.
11. **Fine Positioning** - Align load precisely with variable speed controller.