



Smartwash

Professional

Undercounter

Warewasher

SW400

Professional Undercounter Warewasher




Smartwash

Undercounter Warewasher

The New Smartwash Range of undercounter warewasher is the first attractive, intelligent, one touch warewashing system in Australia that offers incredibly sustainable results in water and energy consumption.

This professional warewasher offers the first one touch control panel with digital wash and rinse temperature displays for easy HACCP recording for accurate food safety reporting. These machines are sleek and compact because we know space is of the essence and presentation is key.

Only Smartwash offers you a warewasher with one touch control, drain pump fitted as standard, a self cleaning cycle and 3 wash cycle options, offering you an economical and sustainable solution for your business.

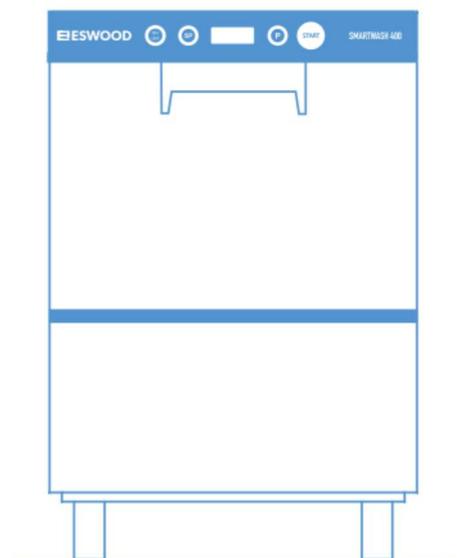



Up to 1200 glasses per hour. Compartmented racks available to suit tall stem glasses

User friendly TOUCH control panel with digital wash and rinse temperature displays for easy HACCP recording

Water saving – uses only 1.9 litres per cycle

Three wash cycles of 60, 90 & 120 seconds

Built-in detergent and rinse aid pump fitted as standard

Self cleaning cycle, easily removable spray arms & filters together with a pressed wash tank

Double skinned door drastically reduces heat & sound emissions

Self-Diagnostic system for accurate fault finding & reduced ownership costs

Thermostop Function to ensure set rinse temperature is achieved

4 x 150mm legs included (optional use)

- A. Drain Connection 20mm ID Hose
- B. Water Connection 3/4" x 1.5 Braided Hose
- C. Electrical Connection 2m 15A Plug

SW400




Professional Undercounter Warewasher

Utilises 400 x 400mm Dish/Cup rack
or 17" x 14" & 14" x 14" Glass rack

SW400 Specifications

DIMENSIONS (WxDxH)	435 x 535 x 690mm
DOOR ENTRY	325mm
RACK SIZE (WxD)	400 x 400mm or 14" x 17" or 14" x 14"
ELECTRIC CONNECTION	240V / 50Hz / 1 Phase
RATING	3.5 kW
WATER SUPPLY	65°C / 2-4 bar (28-58 psi)
SELF CLEANING CYCLE	YES
WASH CYCLE	60 / 90 / 120 sec
WATER CONSUMPTION	Approx. 1.9L per cycle
DOOR CONSTRUCTION	Double-Skinned
WASH / RINSE ARMS	Hydrodynamic Parallel
CONTROL PANEL	Advanced Electronic Soft-Pad
TEMPERATURE GAUGE	Fitted
SELF-DIAGNOSTIC SYSTEM	Fitted
RINSE-AID & DETERGENT PUMP	Fitted
DRAIN PUMP	Fitted
THERMOSTOP, TANK STRAINERS	Fitted
WATERMARK APPROVAL	WMKT25317
HACCP APPROVAL	PE-388-GE-09

Dimensions may change without notice in accordance with product development and design

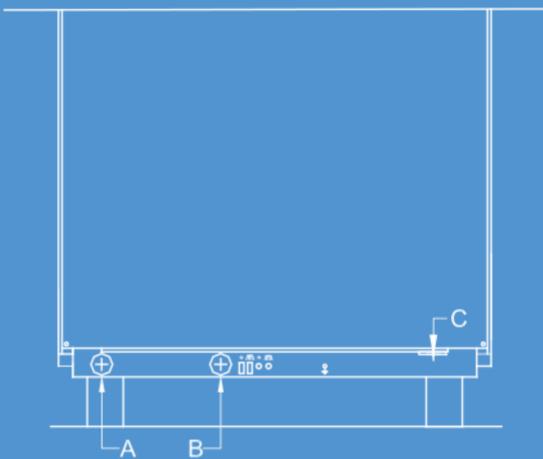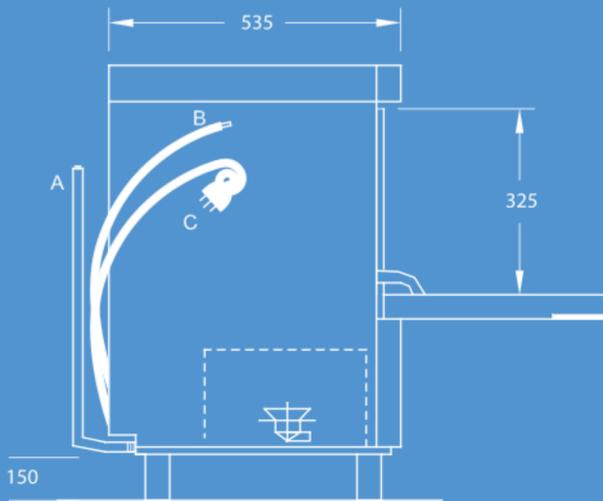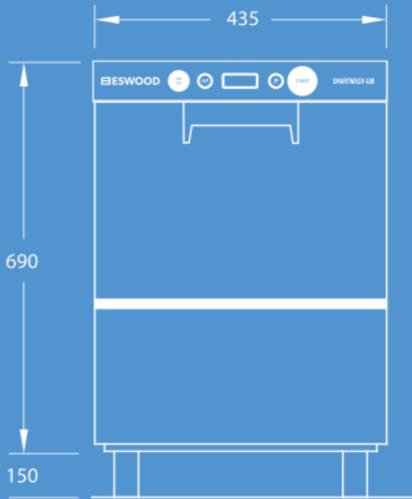

Proudly Distributed By

AUTHORISED DISTRIBUTOR

