GREEN Line ®

HE2020
HOSPITALITY EQUIPMENT 2020 PTY LTD

COMMERCIAL UPRIGHT STAINLESS STEEL REFRIGERATION
Withstand the TEST OF TIME

HOSPITALITY EQUIPMENT 2020 Pty Ltd.

salesnsw@he2020.com.au
www.he2020.com.au
02 9637 3737

www.greenline.com.au

# COMMERCIAL UPRIGHT STAINLESS STEEL REFRIGERATION

## Features more insulation, keeping raw foods fresh while being more energy efficient.

Stainless steel is incredibly durable. It fights off rust, fire and heat which makes it top-choice for those who want an appliance that will last and not show wear and tear.

Stainless steel have a high resistance to corrosion. Low alloyed grades resist corrosion in atmospheric conditions; highly alloyed grades can resist corrosion in most acids, alkaline solutions, and chloride bearing environments, even at elevated temperatures and pressures.
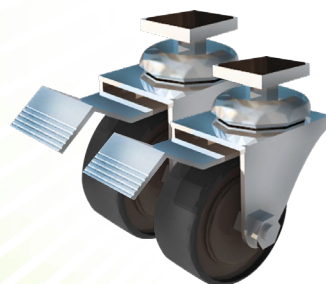
Fan Cooling
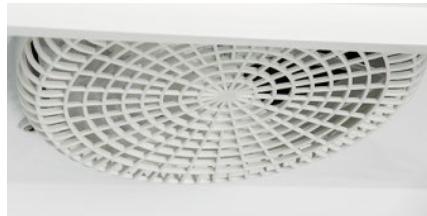
Internal LED vertical lights, plus fluroescent light in top canopy light
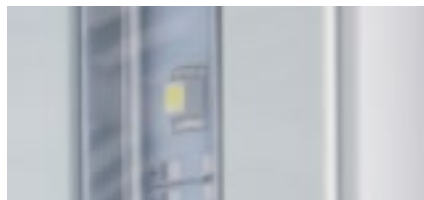
Digital temperature controller

Heavy-duty castors fitted, front with brakes

3 MAIN BENEFITS OF STAINLESS STEEL REFRIGERATION

Durability

Can withstand the commotion of a busy restaurant kitchen. The stainless steel refrigeration won't easily be scratched during accidental collisions, and will resist stains and rust despite constant, messy use.

Easy Cleaning

Stainless steel refrigeration are relatively easy to clean and maintain that you can easily wipe up a spill or polish dull surfaces using just a clean rag.

Germ Resistant

Stainless steel is nonporous, making it a more hygienic surface than wood or plastic. Stainless steel appliances are less likely to become breeding grounds for germs and bacteria.

CHECK OUT OUR OTHER PRODUCTS AT WWW.HE2020.COM.AU

lamber®   LAVA RANGE   jemi Simply The Best

PREMIER RANGE SINGLE DOOR

Withstand the TEST OF TIME

GLKR1S-600 FRIDGE
GLKR1S-600 SINGLE DOOR SS FRIDGE 600L

Features:

Stainless Steel internal and external SS304
Lockable panel door
Heated Doors frame
Top-mounted FRIDGES system
3 rows of Heavy-duty epoxy coated shelves
Heavy-duty castors fitted, front with brakes
Dixell Thermostat

Specifications

38C Ambient @ 60% RH
600-liter capacity
920W Fridge
Temperature range 0c to 8c
Electronic control panel
Auto Defrost & condensate.
Automatic interior lighting
Heavy-duty castors fitted, front with brakes

W742 x D831 x H2010mm
240 volt / 10 Amp. Ref: R134a,
1.84Kw.h/24h
Full Load Amps (F.L.A.): 3.1
Weight: 150kg

GLKF1S-600 FREEZER
GLKF1S-600 SINGLE DOOR SS FREEZER 600

Features:

Stainless Steel internal and external SS304
Lockable panel door
Heated door frame
Top-mounted refrigeration system
3 rows of heavy-duty epoxy coated shelves
Heavy-duty castors fitted, front with brakes
Dixell thermostat

Specifications

38C Ambient @ 60% RH
600 liter capacity
800W refrigeration capacity
Temperature range -22ºC to -18ºC
Electronic control panel
Auto Defrost & condensate
Automatic interior lighting
Heavy-duty castors fitted, front with brakes

W742 x D831 x H2010mm
240 volt / 10 Amp. Ref:R404a
,10.8Kw.h/24h
Full Load Amps (F.L.A.): 3.5
Weight: 130kg

lamber®   LAVA RANGE   jemi Simply The Best

Dare to Compare® Est 1985 COMPARE QUALITY BEFORE PRICE

Finance Available ★★★ ON ALL PRODUCTS TO APPROVED APPLICANTS

PREMIER RANGE 2 DOOR

Withstand the TEST OF TIME

GLKR2S-1300 FRIDGE
GLKR2S-1300 2 DOOR STAINLESS FRIDGE 1300L

Features:

Stainless Steel internal and external SS304
Lockable panel doors
Top-mounted FRIDGES system
Automatic interior lighting
3 rows of Heavy-duty epoxy coated shelves
Heavy-duty castors fitted, front with brakes
Dixell Thermostat

Specifications

38C Ambient @ 60% RH
1300 liter capacity
1554W FRIDGES Capacity
Temperature range 0C to 8C
Electronic control panel
Auto Defrost & condensate.
W1480 x D831 x H2010mm
240 volt / 10 Amp. Ref R134a, 2.82Kw.h/24h
Full Load Amps (F.L.A.): 4.2
Weight: 213kg

GLKF2S-1300 FREEZER
GLKF2S-1300 2 DOOR STAINLESS FREEZER 1300L

Features:

Stainless Steel internal and external SS304
Lockable panel door
Heated Doors frame
Top-mounted FRIDGES system
3 rows of Heavy-duty epoxy coated shelves
Heavy-duty castors fitted, front with brakes
Dixell Thermostat

Specifications

38C Ambient @ 60% RH, 1300 Lt capacity
1316W FRIDGES Capacity
Temperature range -22C to -18C
Electronic control panel
Auto Defrost & condensate.
Automatic interior lighting
Heavy-duty castors fitted, front w/ brakes
W1480 x D831 x H2010mm
240 volt / 10 Amp. Ref:R404a , 18.2Kw.h/24h
Full Load Amps (F.L.A.): 4.6, Weight: 213kg

BUDGET RANGE SINGLE DOOR

BBR1S-590 FRIDGE
BBR1S-590 SINGLE STAINLESS STEEL DOOR FRIDGE

Features:

Stainless Steel internal and external SS201
Heated Doors frame
Top-mounted FRIDGES system
3 rows of Heavy-duty epoxy coated shelves
Heavy-duty castors fitted, front with brakes
Dixell Thermostat

Specifications

38C Ambient @ 60% RH
590-liter capacity
Temperature range 0c to 8c
Electronic control panel
Auto Defrost & condensate.
Automatic interior lighting
W680 x D830 x H2090mm
240 volt / 10 Amp.
Weight: 150kgWeight: 150kg

BBF1S-590 FREEZER
BBF1S-590 SINGLE DOOR SS FREEZER 590L

Features:

Stainless Steel internal and external SS201
Heated Doors frame
Top-mounted FRIDGES system
3 rows of Heavy-duty epoxy coated shelves
Heavy-duty castors fitted, front with brakes
Dixell Thermostat

Specifications

38C Ambient @ 60% RH
590-liter capacity
Temperature range -18 to -22?
Electronic control panel
Auto Defrost & condensate.
Automatic interior lighting
W680 x D830 x H2090mm
240 volt / 10 Amp.
Weight: 150kg

Withstand the TEST OF TIME

BUDGET RANGE 2 DOOR

Withstand the TEST OF TIME

BBR2S-1210 FRIDGE
BBR2S-1210 2 DOOR STAINLESS FRIDGE 1200L

Features:

Stainless Steel internal and external SS201
Heated Doors frame
Top-mounted FRIDGES system
3 rows of Heavy-duty epoxy coated shelves
Heavy-duty castors fitted, front with brakes
Dixell Thermostat

Specifications

38C Ambient @ 60% RH
1200 liter capacity
Temperature range 0c to 8c
Electronic control panel
Auto Defrost & condensate.
Automatic interior lighting
W1370 x D830 x H2090mm
240 volt / 10 Amp.
Weight: 220kg

BBF2S-1210 FREEZER
BBF2S-1210 2 DOOR STAINLESS FREEZER 1200L

Features:

Stainless Steel internal and external SS201
Heated Doors frame
Top-mounted FRIDGES system
3 rows of Heavy-duty epoxy coated shelves
Heavy-duty castors fitted, front with brakes
Dixell Thermostat

Specifications

38C Ambient @ 60% RH
1200 liter capacity
Temperature range -18-22
Electronic control panel
Auto Defrost & condensate.
Automatic interior lighting
W1370 x D830 x H2090mm
240 volt / 10 Amp.
Weight: 220kg

CHECK OUT OUR OTHER PRODUCTS
AT WWW.HE2020.COM.AU

HE2020
PRICE LIST
08/2021

Dare to Compare Est 1985
COMPARE QUALITY BEFORE PRICE

Finance Available ★★★
ON ALL PRODUCTS TO APPROVED APPLICANTS

lamber® LAVA RANGE jemi Simply The Best

GLKF1S-574
S/S SINGLE DOOR FREEZER 600L

1 GLKF1S-574 PLAN
Scale:1 : 25

740
830
1501
671

ELECTRICAL LEAD 240v / 10 AMP. REF:R404A ,10.8KW.H/24H

S/S

PLEASE CLEAN CONDENSER MONTHLY

DO NOT PLACE ANYTHING ON TOP

POWER CHORD, ELECTRICAL LEAD 240 VOLT / 10 AMP. REF:R404A ,10.8KW.H/24H

DO NOT PLACE ANYTHING ON TOP

ALLOW AIR CIRCULATION

ALLOW AIR CIRCULATION

2050
S/S

75
HEAVY DUTY CASTORS

2 GLKF1S-574 FRONT
Scale:1 : 25

1501
830
671
2050
S/S

3 GLKF1S-574 SIDE
Scale:1 : 25

Features:
- Stainless Steel internal and external
- Lockable Panel door
- Top mounted refrigeration system
- 3 rows of Heavy duty epoxy coated shelves

Specification:
- 600 litre capacity
- Temperature range 0-15°c to -18°c
- Electronic control panel
- Automatic interior lighting
- Heavy duty castors fitted, front with brakes
- W740 x D828 x H2050mm
- 240 volt / 10 Amp. Ref:R134a , 1.84Kw.h/24h
- Full Load Amps (F.L.A.) : 3.1

MAINTENANCE:
1. DISCONNECT THE POWER SUPPLY CABLE FROM MAINS.
2. CLEAN THE REFRIGERATOR WITH MILD DETERGENT AND DRY IT WITH SOFT CLOTH.
3. USE A BRISH OR VACUUM CLEANER TO CLEAN THE CONDENSER.
4. IT IS ADVISABLE TO CLEAN THE CONDENSER **ONCE A MONTH**

lamber® LAVA RANGE jemi

HE2020
HOSPITALITY EQUIPMENT 2020 Pty. Ltd.
COMMERCIAL KITCHEN CONSULTANT

A: Unit 3/49-63 Victoria Street, Smithfield
P: 02 9637 3737
E: salesnsw@he2020.com.au
W: www.he2020.com.au

DRAWING TITLE: GLKF1S-574
DRAWN: L. DATE: 21.09.2021 SCALE (A4)
PROJECT NO. DRAWING NO. REV. A1

GLKR1S-574
S/S SINGLE DOOR FRIDGE 600L

1 GLKR1S-574 PLAN
Scale:1 : 25

740
830
1501
671

ELECTRICAL LEAD 240v / 10 AMP. REF:R404A ,10.8KW.H/24H

S/S

PLEASE CLEAN CONDENSER MONTHLY

DO NOT PLACE ANYTHING ON TOP

POWER CHORD, ELECTRICAL LEAD 240 VOLT / 10 AMP. REF:R404A ,10.8KW.H/24H

DO NOT PLACE ANYTHING ON TOP

ALLOW AIR CIRCULATION

ALLOW AIR CIRCULATION

2050
S/S

75
HEAVY DUTY CASTORS

2 GLKR1S-574 FRONT
Scale:1 : 25

1501
830
671
2050
S/S

3 GLKR1S-574 SIDE
Scale:1 : 25

Features:
- Stainless Steel internal and external
- Lockable Panel door
- Top mounted refrigeration system
- 3 rows of Heavy duty epoxy coated shelves

Specification:
- 600 litre capacity
- Temperature range 0°c to 8°c
- Electronic control panel
- Automatic interior lighting
- Heavy duty castors fitted, front with brakes
- W740 x D828 x H2050mm
- 240 volt / 10 Amp. Ref:R134a , 1.84Kw.h/24h
- Full Load Amps (F.L.A.) : 3.1

MAINTENANCE:
1. DISCONNECT THE POWER SUPPLY CABLE FROM MAINS.
2. CLEAN THE REFRIGERATOR WITH MILD DETERGENT AND DRY IT WITH SOFT CLOTH.
3. USE A BRISH OR VACUUM CLEANER TO CLEAN THE CONDENSER.
4. IT IS ADVISABLE TO CLEAN THE CONDENSER **ONCE A MONTH**

lamber® LAVA RANGE jemi

HE2020
HOSPITALITY EQUIPMENT 2020 Pty. Ltd.
COMMERCIAL KITCHEN CONSULTANT

A: Unit 3/49-63 Victoria Street, Smithfield
P: 02 9637 3737
E: salesnsw@he2020.com.au
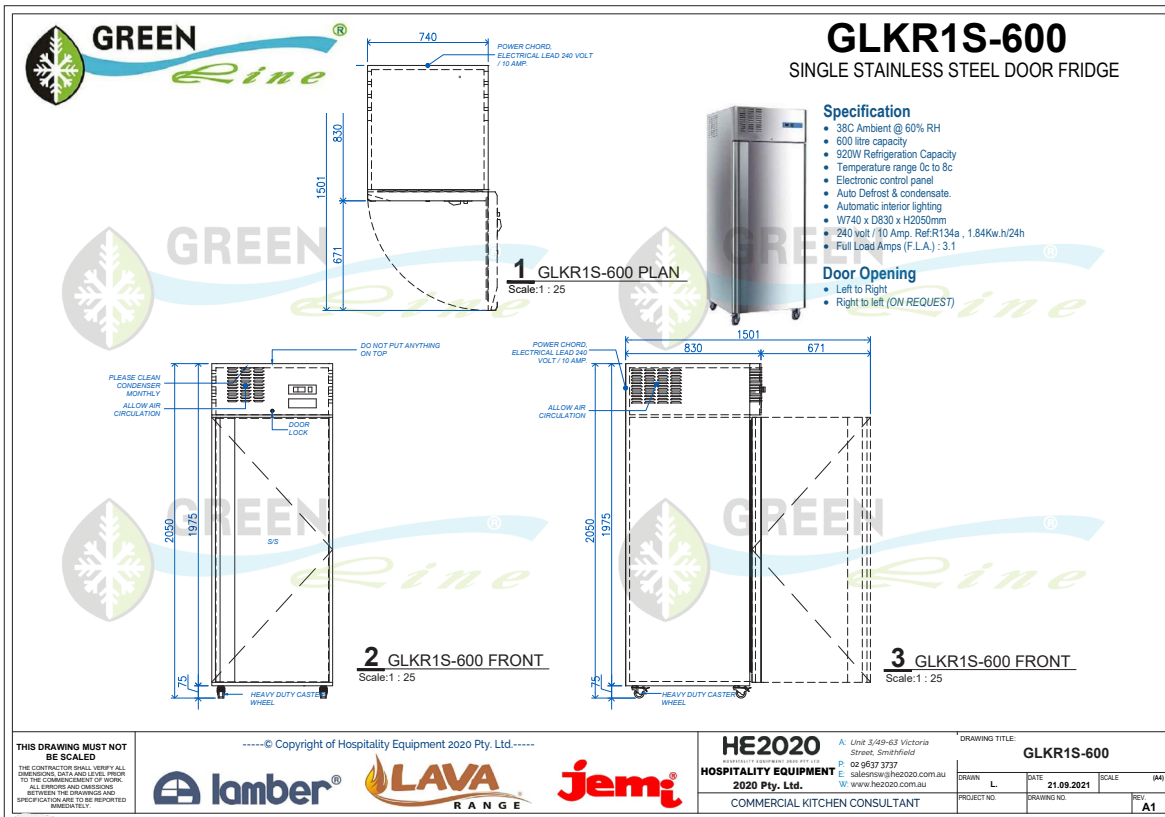W: www.he2020.com.au

DRAWING TITLE: GLKR1S-574
DRAWN: L. DATE: 21.09.2021 SCALE
PROJECT NO. DRAWING NO. REV. A1

CALL US! - 02 9637 3737
EMAIL US! - salesnsw@he2020.com.au

lamber® LAVA RANGE jemi Simply The Best

Dare to Compare® Est 1985 COMPARE QUALITY BEFORE PRICE

Finance Available
ON ALL PRODUCTS TO APPROVED APPLICANTS

GLKF1S-600
SINGLE DOOR FREEZER

GREEN Line®

740

ELECTRICAL LEAD 240v / 10 AMP. REF:R404A ,10.8KW.H/24H

830

1501

S/S

1 GLKF1S-600 PLAN
Scale:1 : 25

671

Specification
- 38C Ambient @ 60% RH
- 600 litre capacity
- 38C Ambient @ 60% RH
- 800W Refrigeration Capacity
- Temperature range -22C to -18C
- Electronic control panel
- Auto Defrost & condensate.
- Automatic interior lighting
- Heavy duty castors fitted, front with brakes
- W740 x D830 x H2050mm
- 240 volt / 10 Amp. Ref:R404a ,10.8Kw.h/24h
- Full Load Amps (F.L.A.) : 3.5

Door Opening
- Left to Right
- Right to left *(ON REQUEST)*

DO NOT PLACE ANYTHING ON TOP

POWER CHORD, ELECTRICAL LEAD 240 VOLT / 10 AMP. REF:R404A ,10.8KW.H/24H

1501

830   671

DO NOT PLACE ANYTHING ON TOP

ALLOW AIR CIRCULATION

2050

2050

S/S

S/S

75

HEAVY DUTY CASTORS

2 GLKF1S-600 FRONT
Scale:1 : 25

3 GLKF1S-600 SIDE
Scale:1 : 25

lamber® | **LAVA RANGE** | **jemi**

HE2020
HOSPITALITY EQUIPMENT 2020 Pty. Ltd.
COMMERCIAL KITCHEN CONSULTANT

A: Unit 3/49-63 Victoria Street, Smithfield
P: 02 9637 3737
E: salesnsw@he2020.com.au
W: www.he2020.com.au

DRAWING TITLE: **GLKF1S-600**
DRAWN: L. | DATE: 21.09.2021 | SCALE (A4)
PROJECT NO. | DRAWING NO. | REV. **A1**

GLKR1S-600
SINGLE STAINLESS STEEL DOOR FRIDGE

GREEN Line®

740

POWER CHORD, ELECTRICAL LEAD 240 VOLT / 10 AMP.

830

1501

671

1 GLKR1S-600 PLAN
Scale:1 : 25

Specification
- 38C Ambient @ 60% RH
- 600 litre capacity
- 920W Refrigeration Capacity
- Temperature range 0c to 8c
- Electronic control panel
- Auto Defrost & condensate.
- Automatic interior lighting
- W740 x D830 x H2050mm
- 240 volt / 10 Amp. Ref:R134a , 1.84Kw.h/24h
- Full Load Amps (F.L.A.) : 3.1

Door Opening
- Left to Right
- Right to left *(ON REQUEST)*

DO NOT PUT ANYTHING ON TOP

PLEASE CLEAN CONDENSER MONTHLY

ALLOW AIR CIRCULATION

DOOR LOCK

2050
1975

S/S

75

HEAVY DUTY CASTER WHEEL

2 GLKR1S-600 FRONT
Scale:1 : 25

POWER CHORD, ELECTRICAL LEAD 240 VOLT / 10 AMP.

1501

830   671

ALLOW AIR CIRCULATION

2050
1975

75

HEAVY DUTY CASTER WHEEL

3 GLKR1S-600 FRONT
Scale:1 : 25

lamber® | **LAVA RANGE** | **jemi**

HE2020
HOSPITALITY EQUIPMENT 2020 Pty. Ltd.
COMMERCIAL KITCHEN CONSULTANT

A: Unit 3/49-63 Victoria Street, Smithfield
P: 02 9637 3737
E: salesnsw@he2020.com.au
W: www.he2020.com.au

DRAWING TITLE: **GLKR1S-600**
DRAWN: L. | DATE: 21.09.2021 | SCALE (A4)
PROJECT NO. | DRAWING NO. | REV. **A1**

GLKF2S-1300
GREENLINE 2 DOOR S/S DOOR FREEZER

1 GLKF2S-1300 PLAN
Scale:1 : 25

1480
830
1509
679

POWER CHORD, ELECTRICAL LEAD 240 VOLT / 10 AMP. REF:R404A ,18.2KW.H/24H
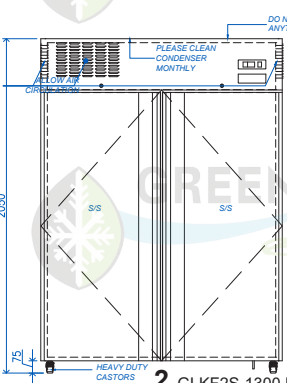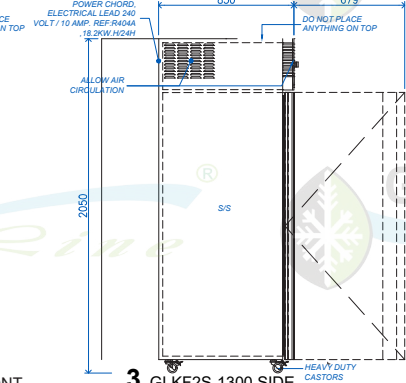
S/S

Specification
- 38C Ambient @ 60% RH
- 1300 litre capacity
- 38C Ambient @ 60% RH
- 1316W Refrigeration Capacity
- Temperature range -22C to -18C
- Electronic control panel
- Auto Defrost & condensate.
- Automatic interior lighting
- W1480 x D830 x H2050mm
- 240 volt / 10 Amp. Ref:R404a ,18.2Kw.h/24h
- Full Load Amps (F.L.A.) : 4.6

DO NOT PLACE ANYTHING ON TOP
PLEASE CLEAN CONDENSER MONTHLY
ALLOW AIR CIRCULATION

POWER CHORD, ELECTRICAL LEAD 240 VOLT / 10 AMP. REF:R404A .18.2KW.H/24H

830
679

DO NOT PLACE ANYTHING ON TOP
ALLOW AIR CIRCULATION

2050
S/S   S/S   S/S

75
HEAVY DUTY CASTORS

2 GLKF2S-1300 FRONT
Scale:1 : 25

3 GLKF2S-1300 SIDE
Scale:1 : 25

HEAVY DUTY CASTORS

MAINTENANCE:
1. DISCONNECT THE POWER SUPPLY CABLE FROM MAINS.
2. CLEAN THE REFRIGERATOR WITH MILD DETERGENT AND DRY IT WITH SOFT CLOTH.
3. USE A BRISH OR VACUUM CLEANER TO CLEAN THE CONDENSER.
4. IT IS ADVISABLE TO CLEAN THE CONDENSER ONCE A MONTH

THIS DRAWING MUST NOT BE SCALED
THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS, DATA AND LEVEL PRIOR TO THE COMMENCEMENT OF WORK. ALL ERRORS AND OMISSIONS BETWEEN THE DRAWINGS AND SPECIFICATION ARE TO BE REPORTED IMMEDIATELY.

-----© Copyright of Hospitality Equipment 2020 Pty. Ltd.-----

HE2020
HOSPITALITY EQUIPMENT 2020 Pty. Ltd.
COMMERCIAL KITCHEN CONSULTANT

A: Unit 3/49-63 Victoria Street, Smithfield
P: 02 9637 3737
E: salesnsw@he2020.com.au
W: www.he2020.com.au

lamber | **LAVA RANGE** | **jemi**

DRAWING TITLE: GLKF2S-1300
DRAWN: L. | DATE: 21.09.2021 | SCALE (A4)
PROJECT NO. | DRAWING NO. | REV. A1
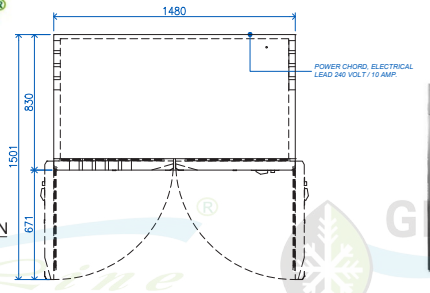
GLKR2S-1300
2 DOOR SS DOOR FRIDGE

1 GLKR2S-1300 PLAN
Scale:1 : 25

1480
830
1501
671

POWER CHORD, ELECTRICAL LEAD 240 VOLT / 10 AMP.
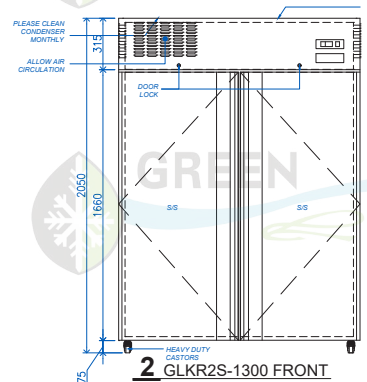
Specification
- 38C Ambient @ 60% RH
- 1300 litre capacity
- 1554W Refrigeration Capacity
- Temperature range 0C to 8C
- Electronic control panel
- Auto Defrost & condensate.
- W1480 x D830 x H2050mm
- 240 volt / 10 Amp. Ref : R134a,2.82Kw.h/24h
- Full Load Amps (F.L.A.) : 4.2

DO NOT PUT ANYTHING ON TOP
PLEASE CLEAN CONDENSER MONTHLY
315
ALLOW AIR CIRCULATION
DOOR LOCK

POWER CHORD, ELECTRICAL LEAD 240 VOLT / 10 AMP.
ALLOW AIR CIRCULATION

1501
830   671

2050
1660
S/S   S/S

75

2050
1975
S/S
75

HEAVY DUTY CASTORS

2 GLKR2S-1300 FRONT
Scale:1 : 25

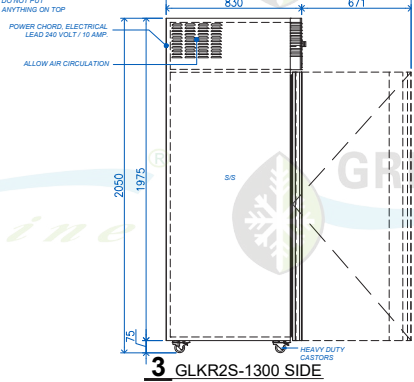**3** GLKR2S-1300 SIDE
Scale:1 : 25

HEAVY DUTY CASTORS

MAINTENANCE:
1. DISCONNECT THE POWER SUPPLY CABLE FROM MAINS.
2. CLEAN THE REFRIGERATOR WITH MILD DETERGENT AND DRY IT WITH SOFT CLOTH.
3. USE A BRISH OR VACUUM CLEANER TO CLEAN THE CONDENSER.
4. IT IS ADVISABLE TO CLEAN THE CONDENSER ONCE A MONTH

THIS DRAWING MUST NOT BE SCALED
THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS, DATA AND LEVEL PRIOR TO THE COMMENCEMENT OF WORK. ALL ERRORS AND OMISSIONS BETWEEN THE DRAWINGS AND SPECIFICATION ARE TO BE REPORTED IMMEDIATELY.

-----© Copyright of Hospitality Equipment 2020 Pty. Ltd.-----

HE2020
HOSPITALITY EQUIPMENT 2020 Pty. Ltd.
COMMERCIAL KITCHEN CONSULTANT

A: Unit 3/49-63 Victoria Street, Smithfield
P: 02 9637 3737
E: salesnsw@he2020.com.au
W: www.he2020.com.au

lamber | **LAVA RANGE** | **jemi**

DRAWING TITLE: GLKR2S-1300
DRAWN: L. | DATE: 21.09.2021 | SCALE (A4)
PROJECT NO. | DRAWING NO. | REV. A1

GREEN Line ®

lamber ®   **LAVA** RANGE   **jemi** ® Simply The Best

HOSPITALITY EQUIPMENT 2020 Pty Ltd.

salesnsw@he2020.com.au | www.he2020.com.au | 02 9637 3737

www.greenline.net.au

VIEW OUR PRICELIST ONLINE
at www.he2020.com.au

Dare to Compare
Est 1985
COMPARE QUALITY BEFORE PRICE