

Three Glass Swing Door Fridge

Range: BackBar BB
SKOPE ID: BB003
Dimensions: 2040mm (W) × 590mm (D) × 1028mm (H)*
Capacity: 635L

Project: _____

Item #: _____

* Height with castors is adjustable from 1015 to 1030.



A glass door under-bar fridge designed to merchandise ready-to-serve cold beverages in bars, restaurants, clubs, pubs, and cafés. Engineered to serve cold drinks at 0°C to 5°C (or adjustable up to 15°C) in ambient environments of up to 40°C. Made from powder-coated, galvanised steel with colour options, it can also be upgraded to full stainless-steel construction. The 'frameless' glassdoors provide maximum product viewing and are designed for condensation protection in most environments via the double-glazed, argon-filled low-e insulated panels and heated fascia. For high humidity tropical environments heated-glass versions are available. The doors and cabinet are fitted with built-in retractable tabs to enable locking via padlock. The built-in LED lights provide optimum merchandising and can be dimmed or timed to turn on and off via a free smartphone app. The fridge uses R290 natural refrigerant for ultra-low energy consumption, low heat discharge and low noise output and can be provided in remote versions. The side-mounted fully removable refrigeration cartridge (with left and right options) is front-breathing and can be removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a controller that connects to a free app to enable the user to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty




Natural Refrigerant



GEMS



SKOPE-connect

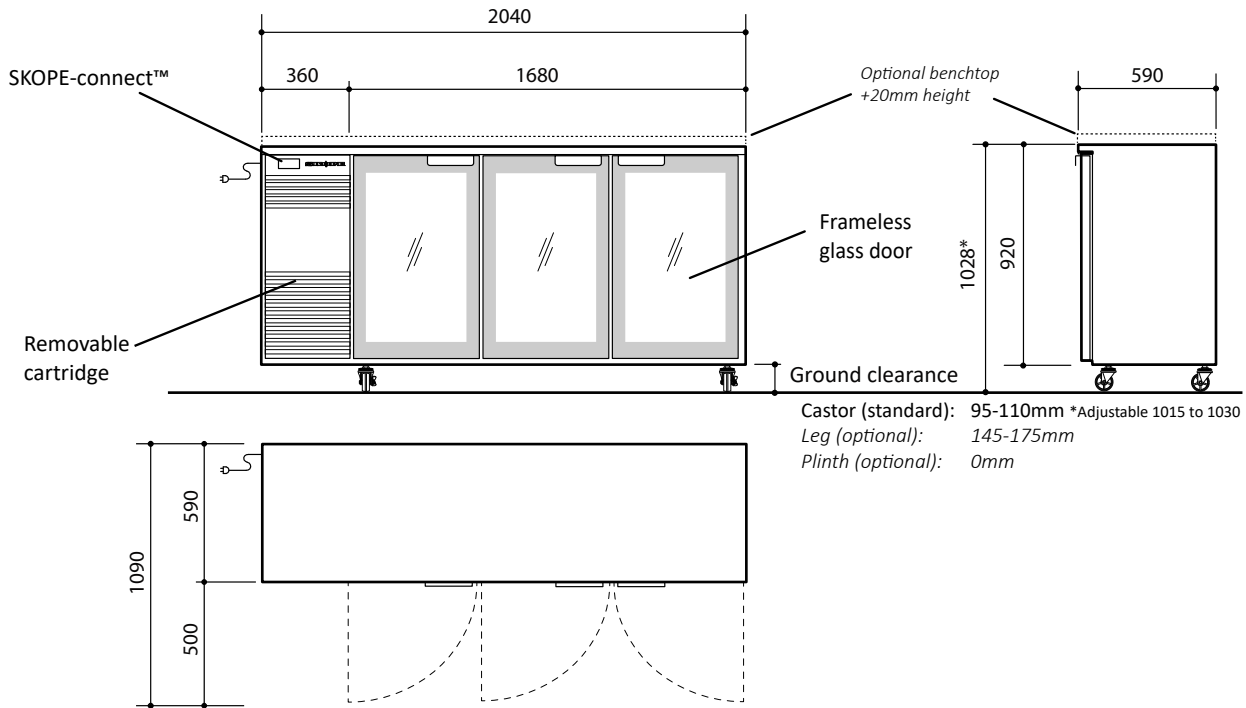

Cabinet

Type	BackBar		
Finish	Powdercoat galvanised steel or stainless steel		
Insulation	Type	PU foam	
	Thickness (mm)	50	
	Blowing Agent	Cyclo-iso Pentane (C5H10/C5H12)	
Doors	Type	Glass swing door (double-glazed, low-e, argon-filled, tab-locking)	
	Opening Size	Height (mm)	730
		Width (mm)	460
Shelving	Six adjustable height, plastic-coated wire shelves 4 × outer shelf (497W × 440L), 2 × inner shelf (555W × 440L)		
Lighting*	Single dimmable, cool white (5500-6500K) LED strip on cabinet ceiling		

Dimensions†

	External	Internal height	Packed
Width (mm)	2040	1580	TBC
Depth (mm)	590	530	TBC
Height (mm)	1028 (std. castors)	758	TBC
	920 (plinth mount)		
Weight (kg)	220		TBC
Capacity (L)	635		
Footprint (m ²)	1.2		

Ventilation (mm)

Top	Sides	Rear
Not required	Not required	Not required

Product Loading

Facing	330ml can	44	600ml bottle	42
Loading	330ml can	264	600ml bottle	252

Performance

Product Temperature Range (°C)	1 to 4 (adjustable* from 0 to 15)	
Operating Temperature	32°C/65% relative humidity	
Max. Operating Temperature (°C)	40	
Sound Level (dB(A))	Standard	<66
	Hush Mode*	<62

Greenhouse and Energy Minimum Standards (GEMS)

Star Rating	9	
Product Temperature Class	M1 (1 to 4°C)	
Operating Temperature Class	3 (32°C/65% relative humidity)	
Total Energy Consumption	2.81 kWh/24h	
Annual Running Costs	\$307.7 (@ \$0.30/kWh)	

Electrical

Supply	220-240 volts a.c., 50 Hz, single phase supply	
Cord	1.9m power cord with 3-pin, 10 amp plug	
Current draw (A)	2.6	

Refrigeration

Controller	SCS Connect (SKOPE-connect™ compatible)		
System Type	Removable cartridge		
Cartridge Weight (kg)	24		
Refrigerant/Charge	R290 / 81g		
Nominal Capacity (W)	650		
Heat Rejection (W)	Average	120	Peak 150
Remote Duty	n.a.		
Defrost Type	Off-cycle		
Drainage	No plumbing required		



BB.3.GSW
on the SKOPE website

*Accessible via the free SKOPE-connect™ app.

†Allow for dimensional tolerances when installing the cabinet(s).

