

PWD Flat Rim Trough



TFR

Scan QR code
to view our
installation notes




Product Info:

- Manufactured to custom lengths
- Available in grade 304 or 316 stainless
- Radius internal corners for easy cleaning
- Extended rear hob for mounting tapware
- 50mm waste supplied
- Available with tapware (see Tapware section)

To order this item please advise:

- Trough length
- Waste position - Left or Right
- Grade of stainless - 304 or 316
- Tap quantity and code (if required)

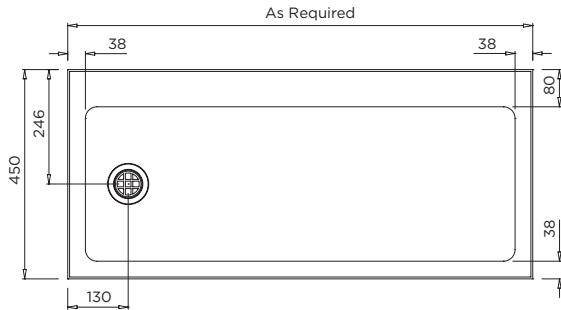

INSTALLATION NOTES

1) Trough is generally mounted on a joinery top. 2) Cut out for trough is overall L x W dimensions (including end flanges) minus 20mm, which leaves a 10mm overhang on all four sides for mounting on bench top. 3) Fixing clips are tightened to locate and secure copper studs to the inside of the cutout. 4) A silicon sealant or adhesive tape can be applied to the underside perimeter of flange for additional sealing and securing where required.

Suggested Tapware:

(see Tapware Section: 11 for complete range of options)



TW-9101
Eco Timed Flow Pillar Tap



TW-9201
Deluxe Timed Flow Tap



TW-9110
Euro Basin Mounted Sensor Tap



TW-0020
Vandal Resistant DPW (NSW) Deluxe Pillar Tap



TW-SET-02
Basin Mounted Tap Set



TW-MIX-01
Basin Mounted Flick Mixer

