

# ED3-48 Display Case

UL

ALTO-SHAAM.

Drive foodservice profits with display cases from Alto-Shaam. LED lighting and mirrored back doors enhance food appearance and boost impulse sales. To not only look but taste great, food is held at optimal, precise temperatures with Halo Heat® technology and top ceramic heaters. Multiple access points and a removable back work shelf makes unloading and loading food effortless for employees. Reduce labor and cleaning time with removable back doors and side panels, and a lifting glass front.

## Standard features

- Fanless, waterless Halo Heat technology
- Overhead LED lighting
- Adjustable thermostats 1-10 per heat zone for top and bottom heat
- Ceramic top heaters
- Operator-side work shelf and cutting board
- Sliding back doors with mirrored glass
- Tempered glass front with self-supported lifting mechanism
- Removable back doors and side glass panels
- One set of 4" (102mm) legs with rubber feet
- Three (3) pan zones to hold standard pan sizes (GN)
- Two (2) heat zones
- Two (2) heat-on indicator lights
- Four (4) long pan dividers (1002584)
- Three (3) short pan dividers (1002585)
- Nine (9) short pan dividers (11318)

Pan* Capacity			
Pan Size	Pan Dimensions		Qty.
Full-Size & One-Third**:	12" x 20" x 2-1/2" (GN 1/1)		3
	12" x 6" x 2-1/2" (GN 1/3)		3
Half-Size & One-Third**:	12" x 10" x 2-1/2" (GN 1/2)		6
	12" x 6" x 2-1/2" (GN 1/3)		3
Full-Size Sheet Pans:	18" x 26" x 1"		2
Max. Capacity/Volume:	48 lbs [22 kg]	30 qts [36 L]	
* Pans are not included with display case. ** Will also accept 4" (100mm) deep pans.			



ED3-48 on Mobile Base



ED3-48 With Legs



ED3(SYS)-48  
With Stationary Base

## Configuration

- ED3-48 with 4-inch legs and rubber feet (standard)
- ED3-48 with mobile base, standard height
- ED3-48 with mobile base, short
- ED3(SYS)-48 with stationary base

## Electrical

- 208V, 50/60 Hz, 1PH
- 240V, 50/60 Hz, 1PH

## Options and Accessories

### Panel Color (select one)

- Black, standard
- Stainless steel, optional

### End Glass (select one)

- Clear glass, standard
- Solar bronze glass, optional (5011353)

### Additional

- Temperature gauge (GU-48153)
- Right-mounted scale platform (5001307)
- Left-mounted scale platform (5001308)
- Work shelf with gravy lane (5005638)
- Pan insert (4" deep) (1001990)
- 1/3 Pan cover-up bar (1008014)
- Sheet pan divider bar package (5002802)

### Extended warranty

- One-year warranty extension




# ED3-48 Display Case



## DIMENSIONS

### ED3-48 with Legs

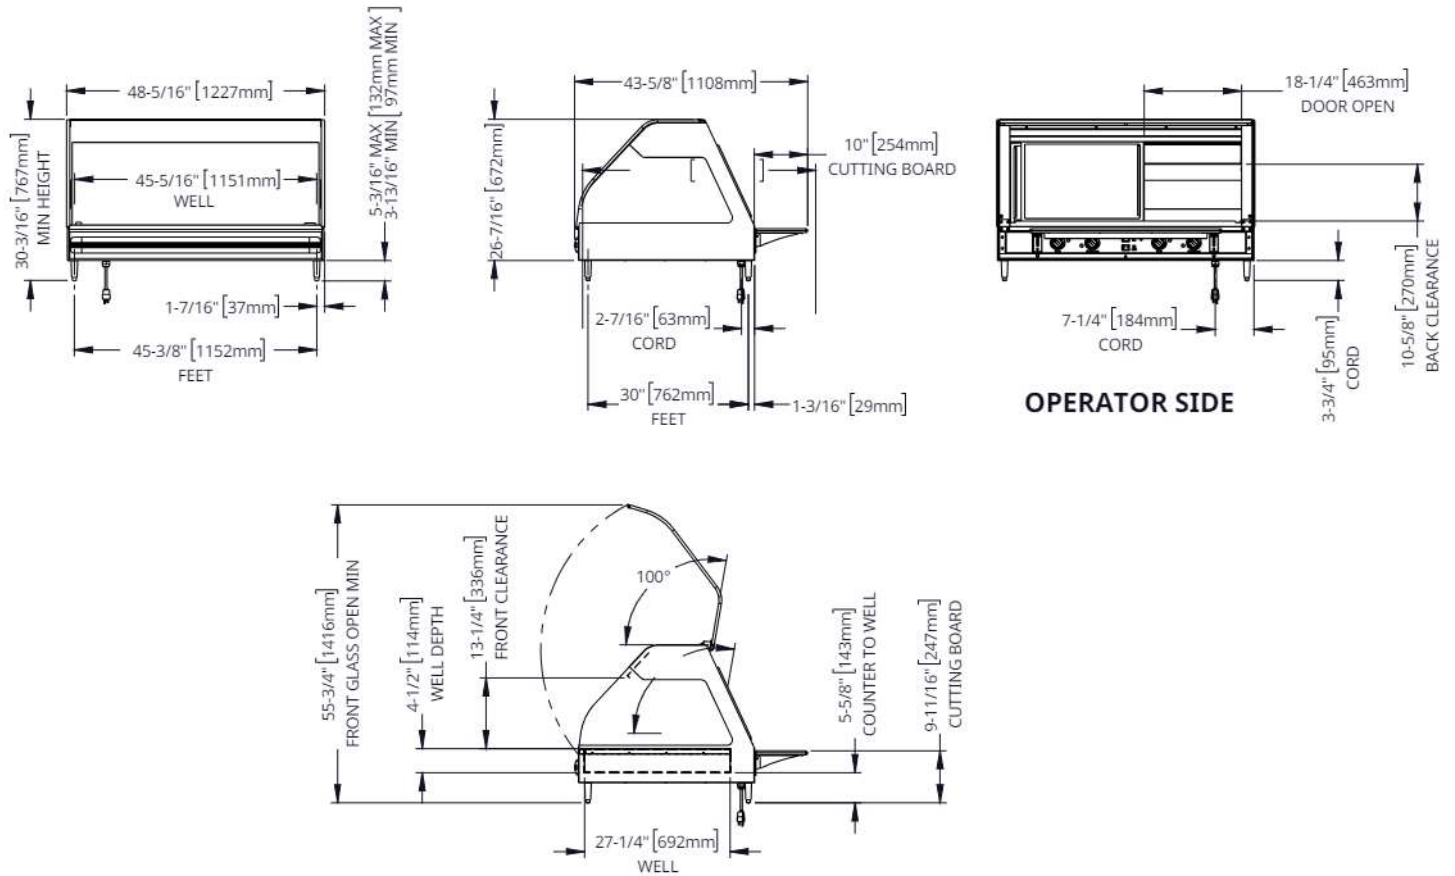

**Model**  
ED3-48  
Feet

**Exterior (H x W x D)**  
30-3/16" x 48-5/16" x 43-5/8" [767mm x 1227mm x 1108mm]

**Well (W x L x D)**  
27-1/4" x 45-5/16" x 4-1/2" [692mm x 1151mm x 114mm]

**Net Weight**  
297 lb [135 kg]

**Ship Dimensions (H x W x D)\***  
45" x 52" x 45" [1143mm x 1321mm x 1143mm]

**Ship Weight\***  
372 lb [169 kg]


\*Domestic ground shipping information. Contact factory for export weight and dimensions.

# ED3-48 Display Case



## DIMENSIONS

### ED3(SYS)-48 with Stationary Base

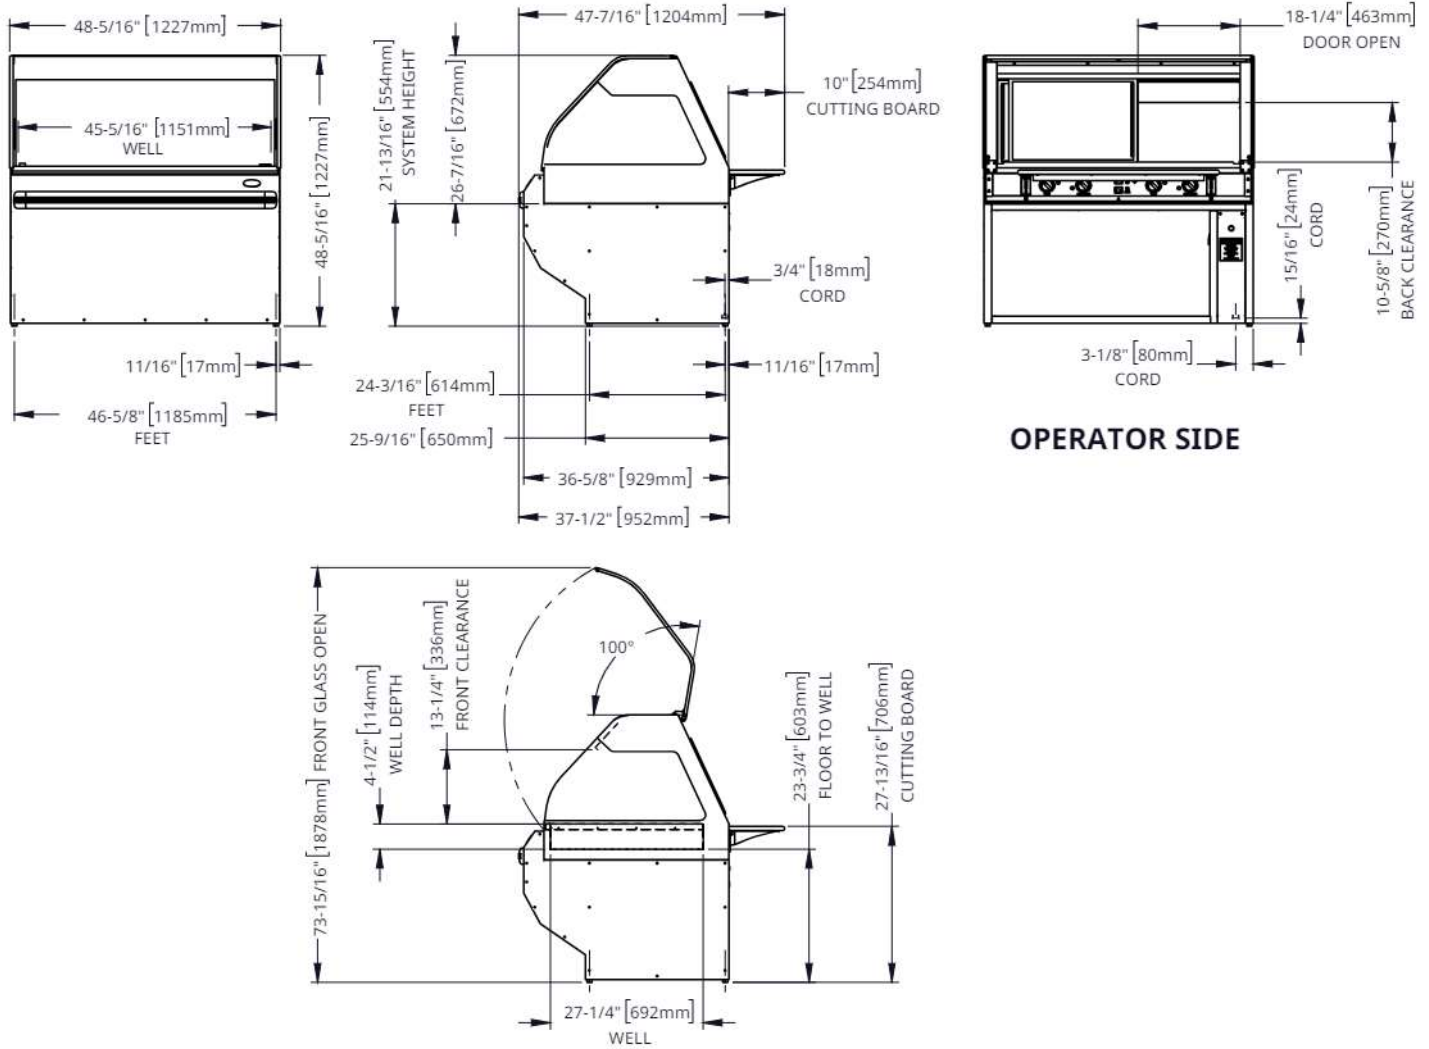

Model	Exterior (H x W x D)
ED3-48	48-5/16" x 48-5/16" x 47-7/16" [1227mm x 1227mm x 1204mm]
SYS	<b>Ship Dimensions (H x W x D)*</b> 65" x 60" x 55" [1651mm x 1524mm x 1397mm]

Well (W x L x D)	Ship Weight*
27-1/4" x 45-5/16" x 4-1/2" [692mm x 1151mm x 114mm]	500 lb [227 kg]

Net Weight
450 lb [204 kg]


\*Domestic ground shipping information. Contact factory for export weight and dimensions.

# ED3-48 Display Case



## DIMENSIONS

### ED3-48 Standard Mobile Base

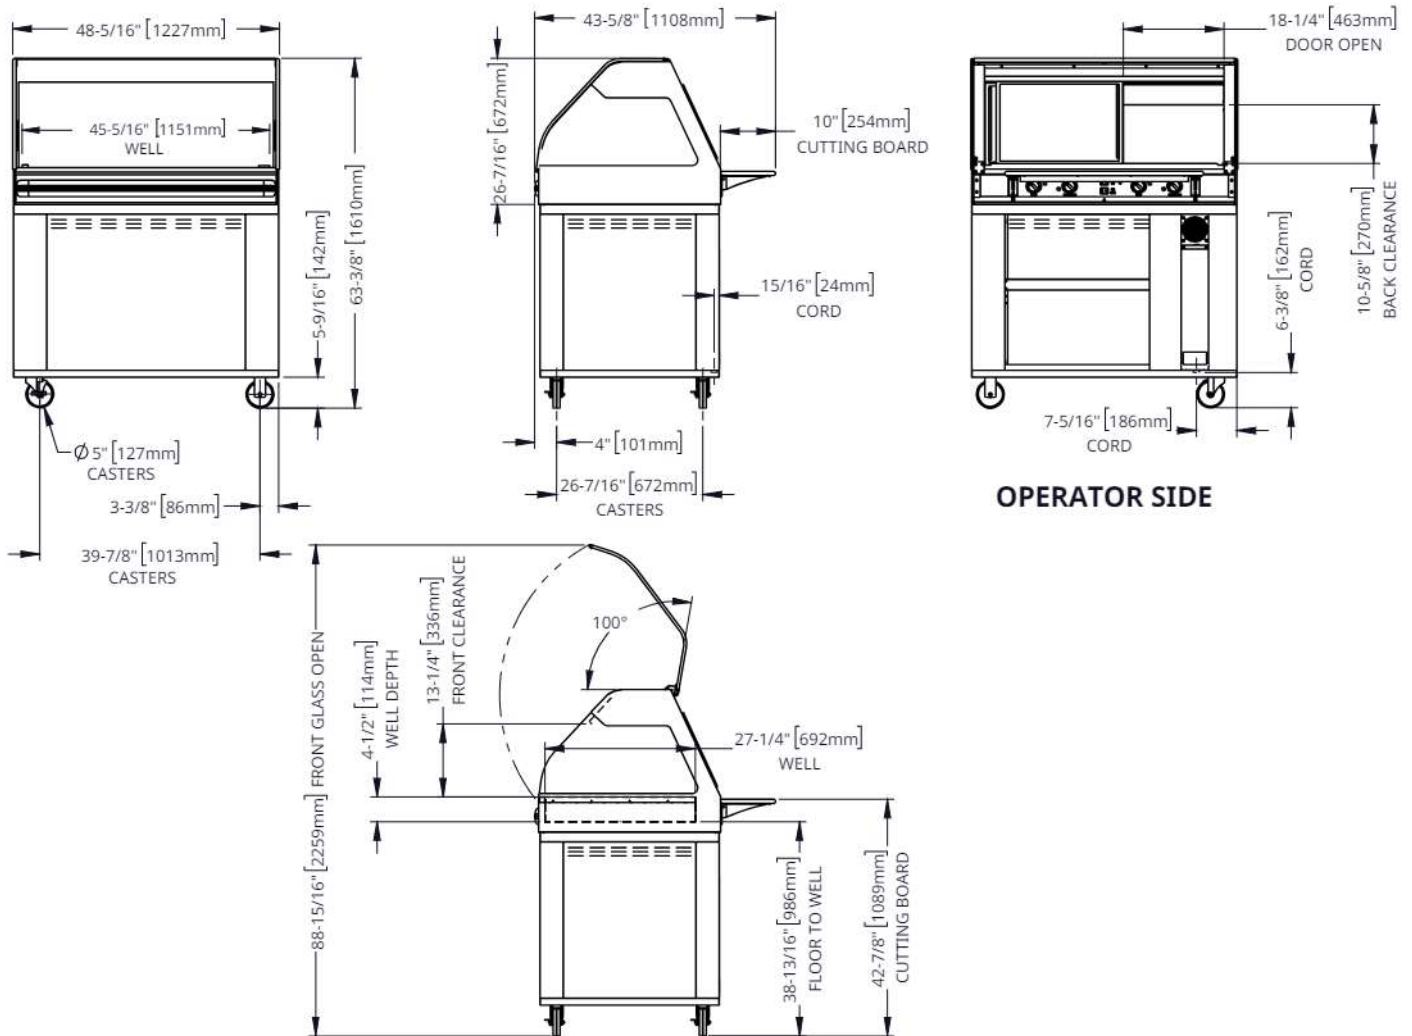

**Model**  
ED3  
Mobile

**Exterior (H x W x D)**  
63-3/18" x 48-5/16" x 43-5/8" [1610mm x 1227mm x 1108mm]  
**Ship Dimensions (L x W x H)\***  
45" x 52" x 82" [1143mm x 1321mm x 2083mm]

**Well (W x L x D)**  
27-1/4" x 45-5/16" x 4-1/2" [692mm x 1151mm x 114mm]  
**Ship Weight\***  
472 lb [214 kg]

**Net Weight**  
397 lb [180 kg]


\*Domestic ground shipping information. Contact factory for export weight and dimensions.

# ED3-48 Display Case



## DIMENSIONS

### ED3-48 Short Mobile Base

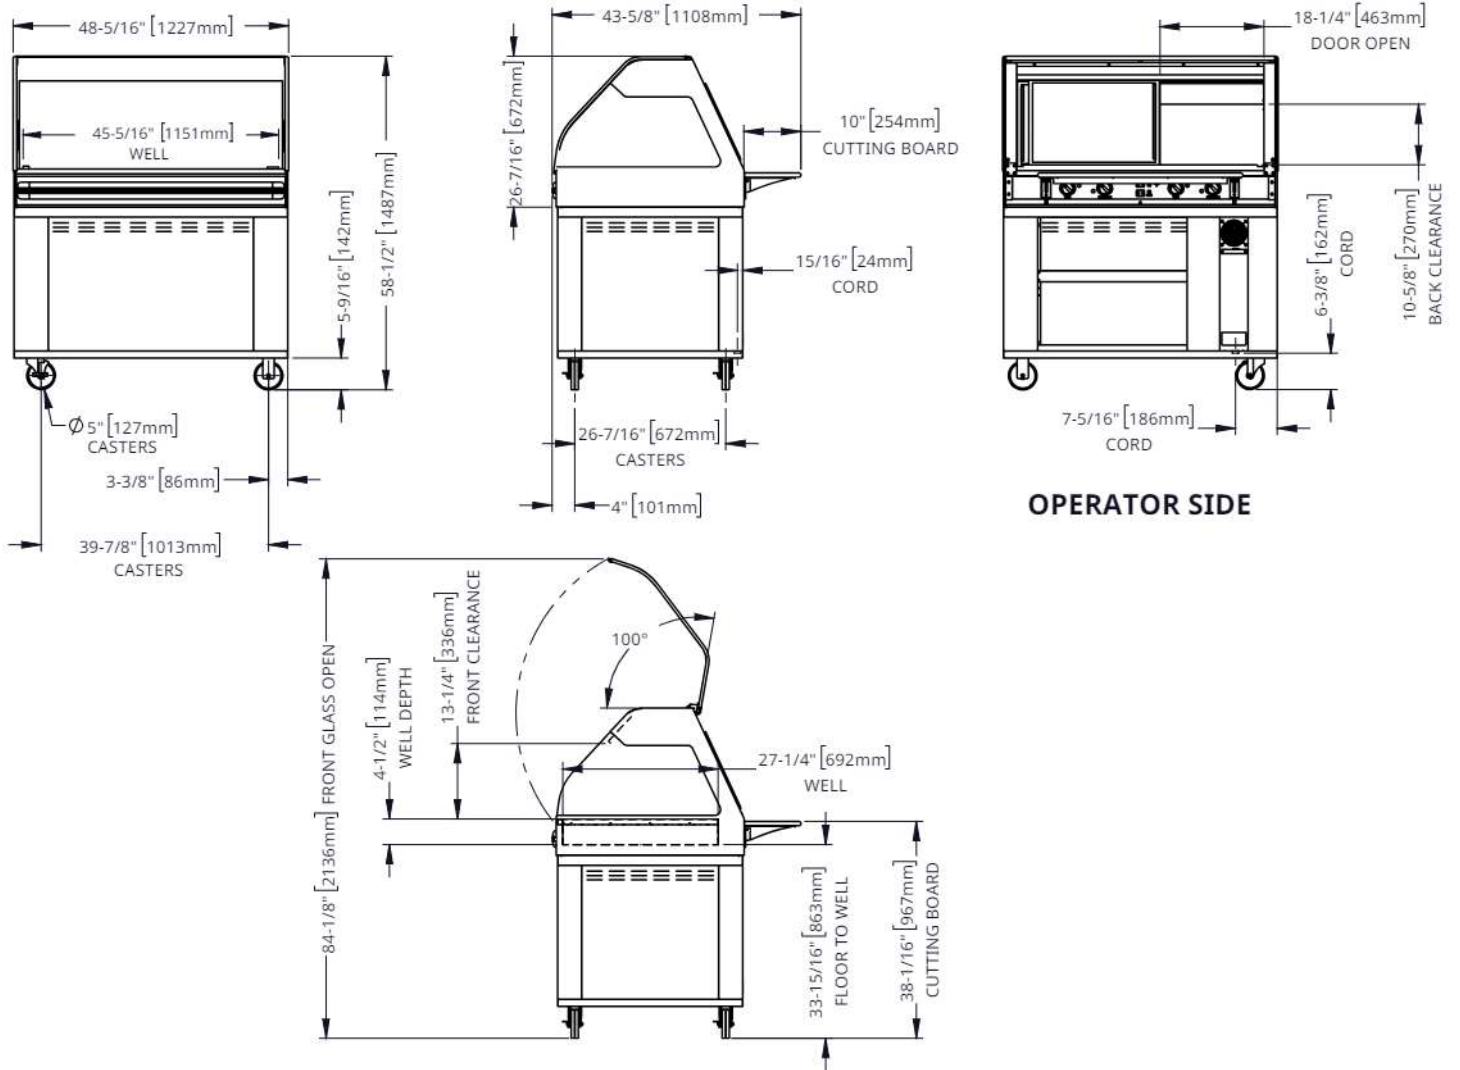

**Model**  
ED3-48  
Mobile  
Short

**Exterior (H x W x D)**  
58-1/2" x 48-5/16" x 43-5/8" [1487mm x 1227mm x 1108mm]

**Ship Dimensions (L x W x H)\***  
45" x 52" x 82" [1143mm x 1321mm x 2083mm]


**Well (W x L x D)**  
27-1/4" x 45-5/16" x 4-1/2" [692mm x 1151mm x 114mm]

**Ship Weight\***  
472 lb [214 kg]

**Net Weight**  
397 lb [180 kg]

\*Domestic ground shipping information. Contact factory for export weight and dimensions.

## ED3 Pan Configurations

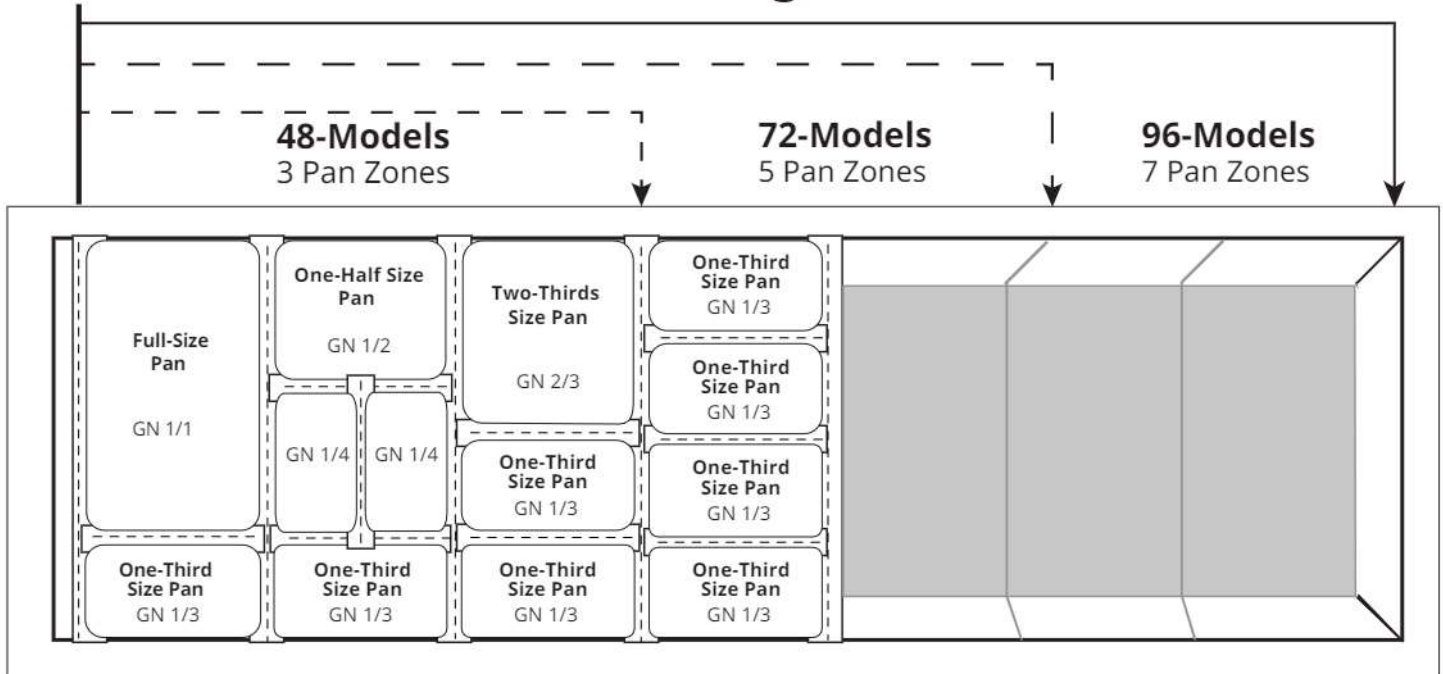

### Installation Requirements

- The display case must be installed level.
- The display case must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.
- Do not install a heated display case near a cold air source such as a freezer, air conditioning vents, or in any area where outside air fluctuation can affect performance.



### 48 Series

ED3-48 With feet	V	Ph	Hz	AWG* minimum	A	Breaker minimum	kW	Connection
	208	1	50/60	14	11.8	15A	2.45	12/3; 6ft; NEMA 6-20 ⚡
	240	1	50/60	14	13.6	17A	3.26	12/3; 6ft; NEMA 6-20 ⚡

\*Recommended minimum conductor sized at 90°C and ambient 30°C.  
Electrical connections must meet all applicable federal, state, and local codes.

ED3-48 With base	V	Ph	Hz	AWG* minimum	A	Breaker minimum	kW	Connection
	208	1	50/60	14	11.8	15A	2.45	Cord, no plug
	240	1	50/60	14	13.6	17A	3.26	Cord, no plug

\*Recommended minimum conductor sized at 90°C and ambient 30°C.  
Electrical connections must meet all applicable federal, state, and local codes.

## CONTACT US

WI64 N9221 Water Street | Menomonee Falls, Wisconsin 53051 | U.S.A.  
Phone: 262.251.3800 | 800.558.8744 U.S.A./Canada | Fax: 262.251.7067 | [alto-shaam.com](http://alto-shaam.com)