

MOFFAT

CP4 450mm Single Pan Gas Pasta Cooker



High performance single pan pasta cookerPatented infra-red burner system

- Easy clean 316 grade stainless steel open pan
- 40L water capacity
- Integrated water fill and starch skimming water faucet
- Six stainless steel pasta baskets supplied
- Hinged basket drain stand
- Safety cut-out thermostat for empty pan/water boil out
- Stainless steel exterior
- Easy clean
- Easy service
- Fully modular

OVERALL CONSTRUCTION

- Pan 1.5mm 316 stainless steel
- Stainless steel front, sides and splashback
- Vitreous enamelled control panel
- Double skin door with stainless exterior
- 25mm (1") skimming overflow and pan drain valve
- 63mm dia. stainless steel adjustable legs to front and two rollers at rear
- Six stainless steel baskets with moulded handles
- 304 stainless steel wire basket support grid in pan

CONTROLS

- Large easy to use knob heat resistant reinforced
- Variable high boil to standby simmer burner control
- Fine adjustment water faucet for pan filling and water refreshing/starch skimming
- Pan protection safety cut-out thermostat
- Millivolt gas valve system (no electrical supply)
- Flame failure protection on pilot
- Piezo ignition to standing pilot burner

CLEANING AND SERVICING


- Open stainless steel pan for easy clean
- Hinged basket drain tray
- Removable basket support grid
- 25mm (1") drain valve for effective draining
- Easy clean stainless steel exterior
- · Access to all parts from front of unit

Matching Products





CP4 450mm Single Pan Gas Pasta Cooker

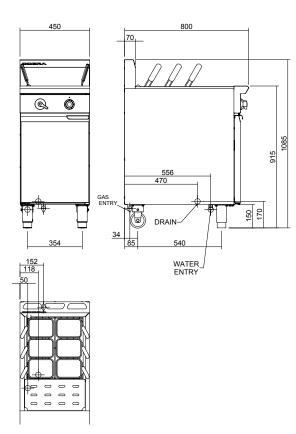

CP4

SPECIFICATIONS

Pan size Water capacity 40L Width 365mm Length 405mm Basket immersion depth 165mm Baskets 6 stainless steel perforated baskets with moulded plastic handles 125mm x 165mm x 180mm deep Stainless steel wire basket support grid Burners 1 x infra-red burner Gas power (gross) 47MJ/hr, 13kW Natural gas

46MJ/hr, 12.8kW LP gas Gas connection R 3/4 (BSP) male 50mm from left hand side, 34mm from rear and 140mm from floor

Water connection Cold water connection 50mm from left hand side, 556mm from rear and 140mm from floor R1/2 (BSP) male Drain connection Drain must be connected to system suitable for boiling water discharge 1" BSP Male connection 118mm from left hand side, 470mm from rear, and 170mm from floor Dimensions Width 450mm Depth 800mm

Height 915mm Incl. splashback 1085mm Nett weight 78kg

Packing data 0.587m3, 95.5kg Width 900mm Depth 520mm Height 1255mm Gas types Available in Natural gas and LP gas, please specify when ordering Other gas types on request Options Side splash guards Joining caps



an Ali Group Company





NOFFAT

moffat.com.au moffat.co.nz

Australia moffat.com.au

Moffat Pty Limited Victoria/Tasmania 740 Springvale Road Mulgrave, Victoria 3170

Telephone +613-9518 3888 Facsimile +613-9518 3833 vsales@moffat.com.au New South Wales

Telephone +612-8833 4111 nswsales@moffat.com.au

South Australia Telephone +613-9518 3888 vsales@moffat.com.au

Queensland Telephone +617-3630 8600 gldsales@moffat.com.au

Western Australia Telephone +618-9413 2400 wasales@moffat.com.au

New Zealand moffat.co.nz

Moffat Limited

Rolleston 45 Illinois Drive Izone Business Hub Rolleston 7675 Telephone +64 3-983 6600 Facsimile +64 3-983 6660 sales@moffat.co.nz Auckland

Telephone +64 9-574 3150 sales@moffat.co.nz





Quality Management Standard

Designed and manufactured by MOFERT

ISO9001

All Cobra products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd AN.C.01.19 / 1598