


1.0	machine connection: drain connection hose, DN 22 hose fitted as odour trap in interior of machine
1.1	drain (max. 350 mm above finished floor level), DN 50
2.0	Machine connection: fresh water supply, G 3/4"
2.2	Soft cold water 10°C, DN 15, G 3/4 a max. 0,54 mmol/l CaCO ₃ (max. 3°dH) Flow rate: total 6.8 l/min (at 15 °C inlet temperature and a flow pressure of 200 kPa / 2 bar) electrical conductivity < 1000 µS/cm Minimum flow pressure: 100 kPa / 1.0 bar Maximum pressure: 500 kPa / 5.0 bar in front of pressure reducer
3.0	Machine connection: electrical connection cable 5G 10mm²
3.1	electricity supply to the machine: 3N PE 400V ~ 50Hz nominal current / - capacity: 36.1 A / 20.0 kW ⚡ Voltage equalising cable The master switch must be provided on site
6.0	Heat load of warewash area The values apply for the following room conditions: Room temperature 22 °C, rel. humidity 55 %  Recommended suction area according to German EN 16282 or any local regulations have to be observed to determine ventilation of wash areas The total heat load includes 6.1
6.1	Heat load of the machine in normal washing operation: for 15 programme cycles/h total 3.6 kW, perceptible 3.1 kW, latent 0.5 kW
	For the total space load, all other space loads must be considered. The space ventilation must be designed in accordance with EN 16282.

all cables, pipes etc leaving machine 1,8 m

Machine Equipment

Tank / boiler locked


(A) Entry height



Final rinse dosing unit with suction lance (blue connector)

AirConcept (heat recovery)





Back wall cladding


GiO MODULE (separate)

 Please observe the installation indications of the additional document MP_T-INFO-GIO_EN.pdf



GiO MODULE (W x D x H) 140 x 550 x 600 mm.
Connection pipe between module and machine 3 m long,
additional installation components are necessary
(connection and drain kits)

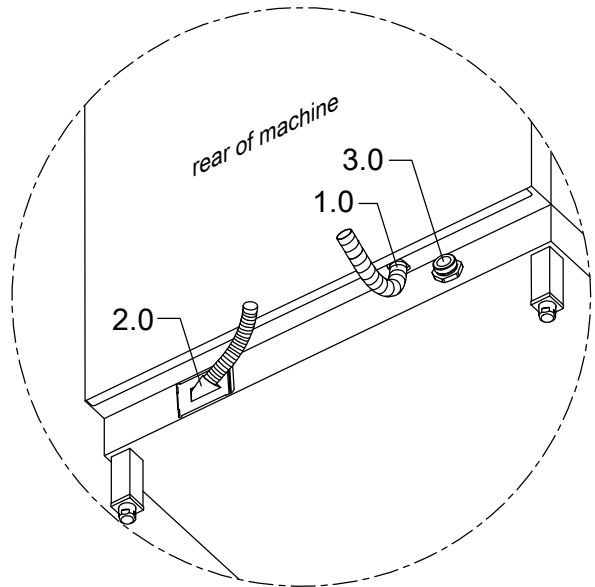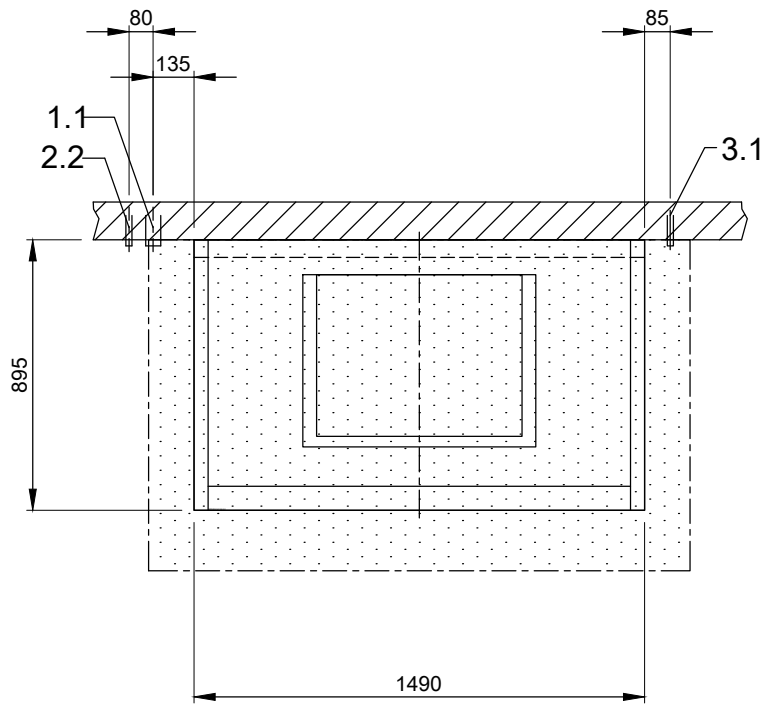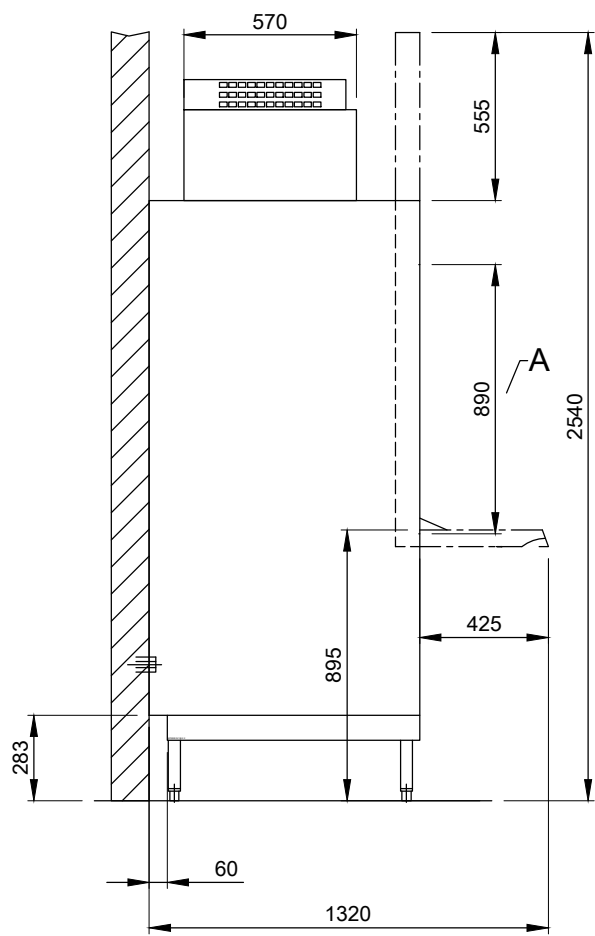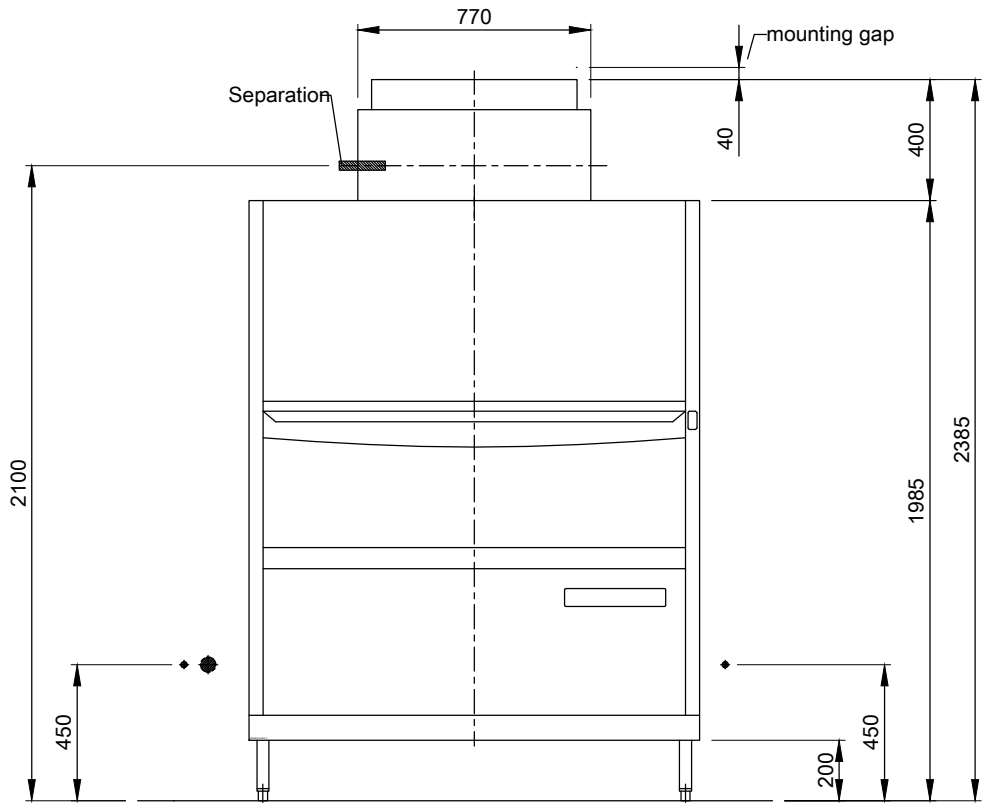

				Revision							
		MEIKO Australia-Pacific Pty Ltd Unit 4, 72 - 74 Gibbes Street Chatswood NSW 2067 TEL. +61-1300 367 730, Telefax +61-1300 656 420 E-MAIL: info@meiko.com.au				Reference				Type	
						DISHWASHER STANDARD DRAWING / AUS				FV250.2	
<p>This drawing may not be neither passed to third parties for their information or copied or used for competitive purposes without our consent. All rights reserved. We reserve the right to make changes resulting from technical progress. This drawing was computer generated and is not subject to the checking and any release process; it is also not subject to change management. Please note: This document is only valid in conjunction with the conditions defined in Supplementary Sheet "Important Information". These can be requested from the manufacturer or downloaded from the Partnernet.</p>		TYPE: UNIVERSAL				GIO MODULE SEPARATE					
						Drawing-No.				Order-No.	
						Scale		drawn:		checked:	
1:25		01.07.2021		m-iplan		01.07.2021		m-iplan			