



v5POS



IP54 Whole Unit



Removable SSD*



Aluminium Die-cast
Sleek Enclosure

* X35 only.



SE NOR v5POS Series Touch POS Terminal


Senor v5POS series feature a brand new concept with an ultra-narrow bezel-less screen and sleek exterior design, with interchangeable frame and casing to match the retailer's style.



v5POS is an energy-efficient solution with low power consumption on a high-performing platform. The CPU consumes less power, generates less heat and helps to keep our environment green.


With its elegant design, v5POS is ideally suited for the retail and hospitality industries' flagship and pop-up stores.

I/O Connector

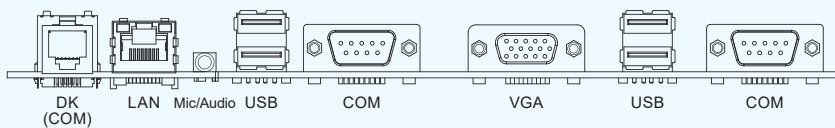

v5POS J19

2 x Serial | 1 x Cash Drawer | 4 x USB | 1 x VGA

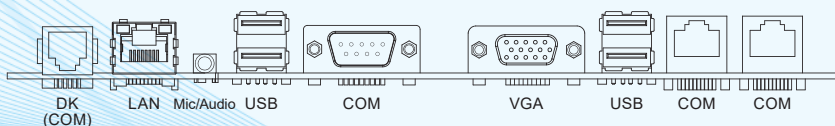

v5POS X35

3 x Serial | 1 x Cash Drawer | 4 x USB | 1 x VGA

Optional Accessories



Wireless LAN



10" / 15" Customer Display



MSR / Fingerprint / RFID Reader




Coloured Frame*



VFD Customer Display



Features

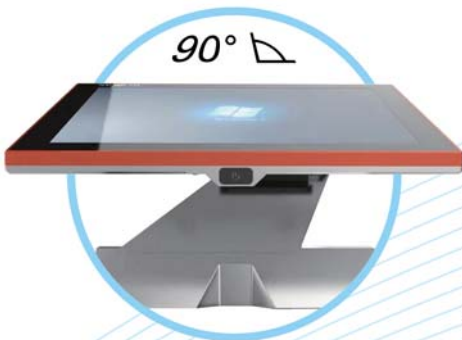

90 Degree Tilt Adjustment



Internal Power Supply
Cable Management System



Fanless / Ventless / Screwless

* Coloured units are for special order only.



SPECIFICATIONS

	v5POS J19	v5POS X35
PROCESSOR	Intel Quad Core Celeron J1900 2.0 GHz, up to 2.42 GHz	Intel Dual Core i3-6100U 2.3 GHz
SYSTEM MEMORY	4 GB DDR3L RAM (up to 8 GB)	4 GB DDR4 RAM (up to 32 GB)
STORAGE DEVICE	M.2 SATA SSD	Half Slim removable SATA SSD (up to 240 GB, supports RAID)

DISPLAY

SIZE / RESOLUTION	15" TFT LCD (LED backlight) / 1024 x 768 pixels
BRIGHTNESS	300 cd/m ²
TOUCH SCREEN PANEL	Projected capacitive touch

I/O INTERFACE

USB PORT	4 x USB 2.0	
SERIAL PORT	2 x DB9	1 x DB9, 2 x RJ50
VIDEO PORT	1 x VGA	
AUDIO PORT	2 x built-in speakers / 1 x 3.5 mm Mic in / Line out	
CASH DRAWER	1 x RJ12 (24 V)	
ETHERNET PORT	1 x RJ45 10/100/1000 Mbps	

OPERATING SYSTEM

WINDOWS	POSReady 7 / 7 Pro / 10 IoT / 10 Pro
---------	--------------------------------------

ENVIRONMENT & MECHANICAL SPECIFICATIONS

DIMENSIONS & WEIGHT	366 (W) x 290 (H) x 193 (D) mm 7.5 kg
CHASSIS MATERIAL	Die-cast aluminium
IP RATING	IP54 whole unit
TEMPERATURE	Operating: 0°C to 40°C Storage: -20°C to 60°C
HUMIDITY	Operating: 0% to 80% Storage: 10% to 90%
POWER CONSUMPTION	12 V / 5 A, internal power adaptor, 100-240 V, 50/60 Hz

MODEL OPTIONS

INTEGRATED CARD READERS	3-track MSR, RFID (125 kHz, 13.56 MHz), IC card reader
CUSTOMER DISPLAY	10" / 15" TFT LCD or 2-line VFD
WIRELESS LAN	Integrated 802.11 b/g/n/ac + Bluetooth 4.1
COLOURED FRAME	Black (standard) White/Red/Green/Blue (special order)
COLOURED UNIT	Black (standard) Gold/Silver (special order)

ALL PRODUCT SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

The Senor Building

65 & 67 Weaver Street
Coopers Plains
QLD 4108, Australia

www.senortech.com.au

P: +61 7 3275 5888
sales@senortech.com.au

SENIOR
TOUCH SCREEN SOLUTIONS

Quality. Safety. Versatility.