



PRODUCT ADVANTAGES

- HIGH VOLUME undercounter dish and glass washer
- LOW VOLUME (10.6litre) single sheet deep drawn wash tank - no welds
- EFFICIENT & GUARANTEED - 2.3 litres / cycle water consumption - rinse pump included to guarantee rinse volume, pressure and sanitation results
- Electronic control with digital temperature read-out
- 3 CYCLES: 60 / 90 / 180 secs - Nominal capacity up to 60 racks/h
- HEAT AND NOISE INSULATED - double walled construction
- Insulated smooth opening counter balanced door
- Removable tank strainer, coarse filter and pump suction casing to maximise wash results and reliability
- Integrated SELF CLEANING on drain out
- Top and bottom rotating wash and rinse arms
- Ready to install - equipped with: fill/drain hoses, electrical cable & plug(15amp 240V), detergent & rinse aid dispensers, rinse pump, drain pump, back flow preventer (Watermark approved), adjustable front feet for levelling and castor rear feet for ease of moving for cleaning under
- Supplied with 1 off 500 x 500mm plate rack, flat rack and single cutlery container
- WATERMARK approved
- 240 / 50 / 1 - 15amp
- (Optional 415/50/3 - additional cost)
- MADE IN GERMANY

TECHNICAL DATA

Cycle times	1. 60sec 2. 90sec. 3. 180sec.
Water consumption	2.3 / cycle
Tank capacity	10.6 litres
Power supply	240 / 50 / 1 (standard)
Booster loading	
Standard	2.1 kW (interlocked)
Alternative	6.2 kW
Total loading	
Standard	2.9kW 15 A
Alternative	7.7 kW 415/50/3N
Wash pump	0.6 kW
Rack size	500 x 500 mm
Loading height	425 mm
Noise level	60.5 dB (A)
Weight (gross/net)	70 / 60 kg

INDUSTRY KITCHENS

www.industrykitchens.com.au 1800 611 058



*Thermostop guarantees required temperatures with cold water and / or 240 V connection, the actual cycle times extend accordingly.

For machine protection the water hardness should not exceed 3°dH, if higher we recommend using an integrated water softener or an external water softener of the product line HYDROLINE PROTECT.

CONNECTIONS

① Drain hose	2,000 mm ID20/OD25
RO-IV / RO-S	Independent gravity waste to tundish
② Supply hose	2,000 mm R 3/4"
Flow pressure	0.5 (0.8 with softener)-6 bar
Max. supply water temperature	60°C 35°C with RO
Required flow rate	5 l/min
③ Power cord	2,000 mm
Supply hose for	
④ Detergent	2,500 mm
⑤ Rinse aid	2,500 mm

DIMENSIONAL DRAWING

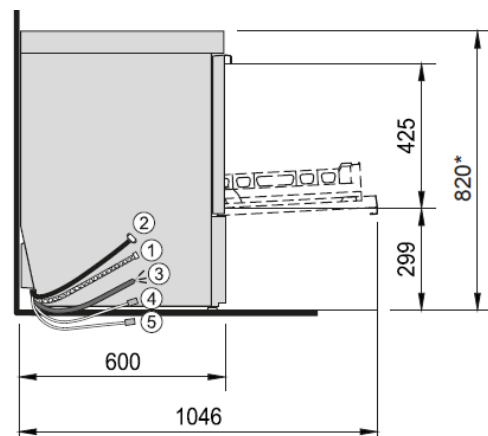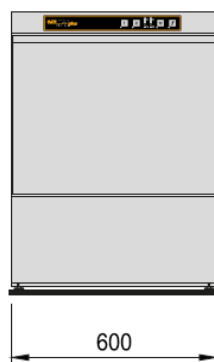

* Plus adjustable feet / rear castors