Section 1 : Telescopic Mast







NBS-3682


2-section anodised aluminium telescopic mast

68mm O.D. base

2.82 metres - Packed

5.33 metres - Extended



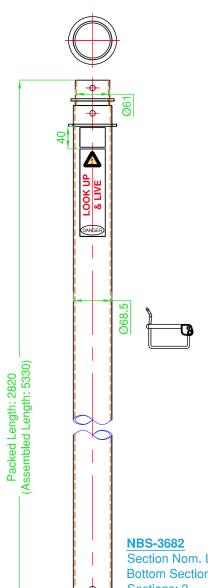

Specifications		
Construction	Clear anodised aluminium telescopic sections with section stop guides and 1 x passivated D-locking clip	
Number of Sections	2	
Retracted Height	2.82 metres / 9.25 ft	
Extended Height	5.33 metres / 17.49 ft	
Weight - excl. D-clips	8.0 kg / 17.64 lbs	
Wind Load rating - Max.	160 kph / 99mph - with each section guy wire supported	
Top section load rating	5.0 kg / 11.02 lbs	
Max. surface area	0.2m²	
Base Section Dimension	O.D: 68mm / 2.67"	
2nd Section Dimensions	O.D: 61mm / 2.40"	
Supplied Accessories	1 x gold passivated section D-clips	

NBS-3682	
Section Nom. Length: 3 mtr	
Bottom Section: Ø68	
Sections: 2	

Required Accessories - order quantity separately to suit 3/4 configuration		
Guy Wire - High strength nylon Single units, order by quantity required either 3 or 4 at each section	NBS-NGW10 - 10 metre guy wire for both section	
Anodised Aluminium Guy Rings - free rotating single unit required - per mast	NBS-AGR62 - Suits 61mm O.D. bottom section NBS-AGR56 - Suits 55mm O.D. top section	

Optional Accessories - order separately to suit configuration	
Mount Bases	NBS-68WStand - drive-on/underwheel static stand NBS-68TWStand - drive-on/underwheel tilt stand NBS-68TBMount - tow-bar socket mount NBS-BS68 - static flat roof/ground stand
Base Extensions	NBS-4761-MK - 4 metre x 76mm O.D. base extension kit with guy ring and flat ground/flat roof mount base
Antenna/Equirement mounts	A-2871-4 - 1.3m top accessory mount tube 50mm O.D., includes 'D' locking clip