

Regal Urinal



WELS Reg #U00435



Scan QR code to view our installation notes



UR URAM

Product Info:

- Highly vandal resistant stainless steel construction
- 'AutoFlush' model supplied with sensor flush (FSM)
- Rear water entry and outlet housed within urinal body
- Water-efficient, low flush volume rating 0.5L

To order this item please advise:


- UR = standard model
 - URAM = auto flush urinal
- Includes Smart Saniflush Sensor System (FSM) & 450mm flexible braided hose.

Suggested Mounting Heights:

Dimension from finished floor to front edge/rim of urinal



- Adults - 610 mm
- Juniors - 510 mm

NB: Heights are suggestions only, subject to suitability of users for each individual project.



INSTALLATION NOTES

1) Urinal is fixed to rear wall across the top axis with an offset bracket (supplied) and fixing holes in urinal body accessed via opening in urinal base. 2) Recommended water connection to 1/2" male thread spreader is via a flexible connector (not supplied) under mains-pressure to ensure adequate flow and to flush sufficiently with 0.5L volume.

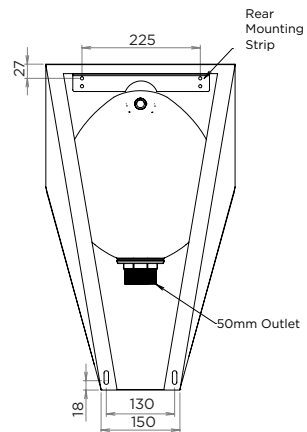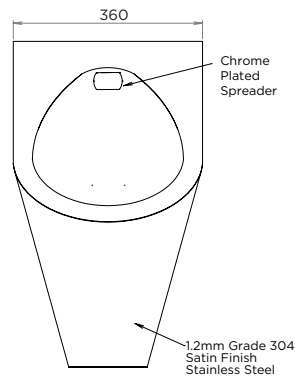

Internal waste connection can be accessed through a void in the underside of the urinal body = 110mm x 200mm.

