


HORNET™ G2 LITE TRAILER


3000 - 4060
 275-350 BAR
PSI


15 - 21
L/PM


HONDA GX390
 PETROL
ENGINE TYPE
POWERED by
HONDA


200L
WATER TANK CAPACITY


SINGLE
AXLE



HERO INNOVATIONS


-  **TURN KEY SOLUTION**
Quality assured and ready to work
-  **PURPOSE BUILT**
Built for high pressure water equipment
-  **AUSTRALIAN MADE**
Made for tough Australian conditions







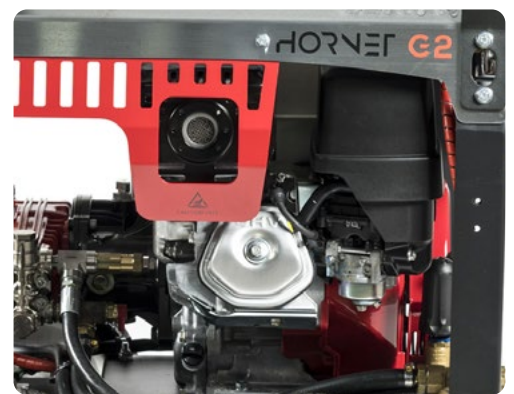

SHOWN WITH OPTIONAL TOOL BOX & LOW PRESSURE HOSE REEL

APPLICATIONS

-  Portable High Pressure Cleaning
-  Tradesmen
-  Commercial Cleaners
-  Agriculturist



STANDOUT FEATURES

-  Quick release tow coupling with 50mm ball.
-  Heavy duty jockey wheel.
-  Full Galvanised construction. Made In Australia
-  On-board 200L water tank, with low level water cut out protection and high flow inlet float valve.
-  Sunraysia style wheels and heavy duty tyres.
-  Pro Rapid Style high pressure hose reel with 30m high pressure hose fitted.

STANDARD EQUIPMENT



Pro Rapid High Pressure Reel + 30m 3/8" Non Marking Double Wire Braid Hose w/M22 Couplings




200L On-board Water Cartage Tank & Float Valve w/Low Level Cut Out



Hornet G2 Machine w/J5500K Gun & Lance accessories.

DIMENSIONS (MM)

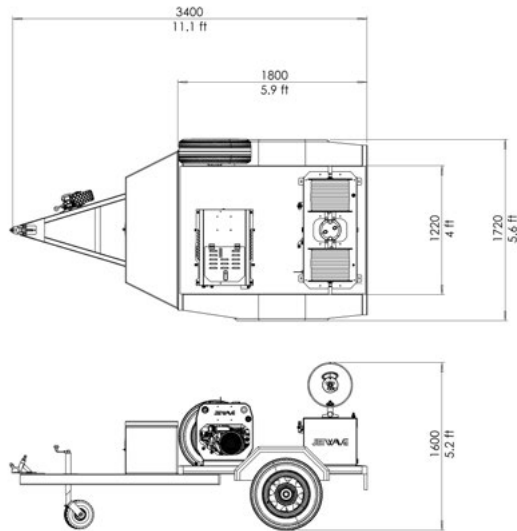

TRAILER FEATURES

HORNET™ G2 LITE TRAILER

Product Codes	CW4000-15PEG2LTETRAILER-B CW3000-21PEG2LTETRAILER-B
Origin	Made in Australia
Materials	Welded RHS (dark grey enamel paint finished) 3mm mild steel checker sheet floor
Suspension System / Spare Wheel	7 Leaf slipper suspension / Y (Standard Wheel)
Tyres & Wheels	14 x 6 5" 114 PCD-185R14 102 LOAD LT
Axle & Hubs / Brakes	Solid 45mm Square Premium 1045 Grade Steel / Mechanical Disc Brakes & Calipers
Tow Hitch / Jockey Wheel	50mm Ball coupling / 10" Heavy Duty
Plug Type / Lights	7 Pin flat / LED ADR Approved multi-volt
Trailer Rating	1300KG
Other Features	Additional Bracing / A-Frame draw bar / Corner fill-ins

WATERTANK FEATURES



Origin / Material	Made in Australia / Polyethylene
Tank Fill Lid / UV Stabilised	Y / Y
Tank Capacity	200L

HOSE REELS

Type	1 x Pro Rapid Style Hose Reel (Optional Low pressure available)
Capacity	Up to 60m of 3/8" High Pressure Hose

DIMENSIONS & WEIGHT



Total Dimensions	3400mm(L) x 1720mm(W) x 1600mm(H)
Total Weight (approx.)	TBA (dry) / TBA (wet)

WARRANTY(S)



Trailer Warranty	1 Years
Water Tank Warranty	5 Years

OPTIONAL UPGRADES

Add 30m High Pressure Hose (Total 60m)	52001-ADD30M
Pro Rapid Low Pressure Reel w/30m of 3/4" inlet hose	1067CMP LLP
Hose Reel Roller Guides	1067-GUIDEASSY
1500mm Draw Bar Mounted Alloy Tool Box	31602
SA Trailer Registration + Plate Fee	

Copyright © 2024 Jetwave® Group Pty Ltd. All Rights Reserved.

The manufacturer reserves the right to modify design features and technical facts without notice, due to our principals of continuous improvement.
*Coverage against defects in material and workmanship (refer to Jetwave's and component partners T&Cs).

V4.0 07/24