



ERIKKILA

MOVABLE CRANES

LIFTING EXCELLENCE THROUGH INNOVATION AND QUALITY


SAFE & RELIABLE LIFTING— WHEREVER YOU NEED IT

Founded in 1912 in Vyborg, Finland, Erikkila has specialized in lifting solutions since 1976, developing the Prosystem light crane system. A pioneer in the industry, the company introduced the low headroom bridge design and patented the overload indicator for light cranes.

With headquarters and production located in Masala, Finland, all light cranes, jib cranes, and movable cranes are made from European-sourced materials and comply with strict quality standards. With 100+ partners in 40 countries, customers are supported worldwide.

Erikkila's light crane systems are designed for workstations and production lines, offering lifting capacities of up to 2,000 kg. As part of the Kito Crosby Group, the company continues to lead in safety, reliability, and innovation.



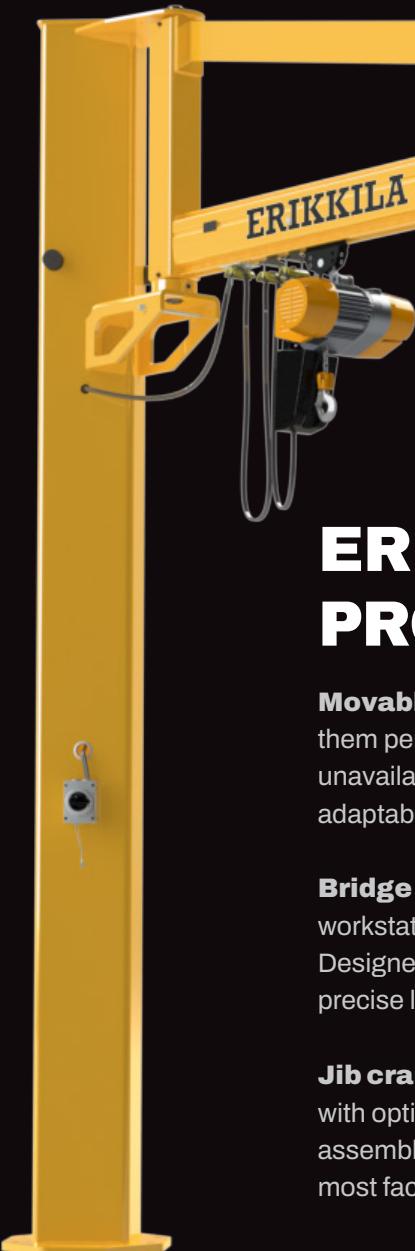

Column Jib Crane
(overbraced steel)



Double Girder Crane
(steel bridge & track)

ERIKKILA PRODUCT RANGE

Movable cranes offer flexibility and mobility, making them perfect for production facilities where fixed cranes are unavailable or impractical. Easy to relocate, they provide an adaptable lifting solution across multiple workstations.

Bridge cranes and hoist tracks are user-friendly workstation solutions offering wide work area coverage. Designed for effortless operation, they ensure smooth and precise load handling.

Jib cranes provide versatile and durable lifting solutions, with options for wall- or floor-mounting. Ideal for production, assembly, and maintenance, they integrate seamlessly into most facilities.



Movable workstation crane
(two bridges)

ENGINEERED FOR MOVEMENT, BUILT FOR SAFETY AND PERFORMANCE

Movable Portal and Workstation Cranes provide versatile lifting and load handling precisely where it's needed — at various workstations throughout the facility. These solutions are ideal for environments without permanent crane systems, spaces where fixed installations aren't possible due to structural limitations, or when lifting needs are temporary, such as during seasonal demand peaks. The cranes are quick to assemble and easy to relocate, offering a practical and flexible lifting solution for dynamic work environments.

POWER SUPPLY OPTIONS

The system can be powered with a flat cable, a round cable, or an internal conductor rail. The flat cable or round cable is a cost-effective and reliable solution, though it requires a separate cable trolley running alongside the crane, slightly reducing the available working area. The internal conductor rail, integrated into the crane structure, maximizes the usable workspace.

PREMIUM ALUMINIUM PROFILES

High-quality anodized aluminium profiles, available in four sizes, provide an ideal combination of strength, durability, and lightweight properties. Designed for long-lasting performance and smooth operation, they are key to the reliability of the movable crane system.

SMOOTH-RUNNING TROLLEYS

Designed for aluminium profiles, the trolleys ensure quiet operation and minimal rolling resistance, making load handling light and effortless.





MOVABLE WORKSTATION CRANE

Flexible lifting for evolving workspaces

When fixed crane systems aren't an option — due to wall, floor, or ceiling limitations — Movable Workstation Cranes provide an efficient and cost-effective alternative. Designed for quick setup and easy relocation, these cranes are ideal for temporary facilities such as rental or overflow spaces, or any environment where change is constant.

Unlike traditional overhead cranes, such as fixed bridge cranes, which are typically installed for 10 years or more, a movable workstation crane can be deployed for just a few months — or even weeks — without compromising performance. The system requires no anchoring or structural modifications, making installation fast, affordable, and completely reversible.

If the floor can handle a forklift, it can handle this crane. Easily reposition the system as often as needed to match layout changes and production flow.



A range of bridge solutions ensures efficiency

Designed to fit a wide range of environments, the movable workstation crane is available with a raised configuration for height-limited areas. For applications requiring high throughput or multiple workstations, the crane can be equipped with two bridges, enabling either parallel or independent lifting operations. This modular flexibility helps reduce downtime, improve process flow, and make the most of every square meter.

Key benefits:

- **Quick installation** – No need for anchors or building modifications
- **Fully movable** – Quickly adjust to layout changes*
- **Ideal for temporary setups** – Perfect for rental or interim facilities
- **Enhances efficiency and ergonomics** – Improves productivity at the workstation level
- **Supports add-ons** – Integrate lighting, electricity, compressed air, balancers, and more
- **Rental-friendly** – A viable option for crane rental businesses
- **Reliable and safe** – Designed for industrial use with heavy-duty casters and locking mechanisms

*Note: Movable workstation cranes must not be moved while carrying a load.



MOVABLE WORKSTATION CRANES

- TECHNICAL DATA

Movable Workstation Crane, Single Bridge				
Capacity [RC] (kg)	Bridge Width (mm)	Track Length (mm)	Wheel Load (kg/wheel)	
30	min.	2000	3000	110
	max.	6000	8000	180
60	min.	2000	3000	140
	max.	6000	8000	210
100	min.	2000	3000	170
	max.	6000	8000	250
125	min.	2000	3000	200
	max.	6000	8000	300
160	min.	2000	3000	220
	max.	6000	8000	330
180	min.	2000	3000	230
	max.	6000	8000	350
240	min.	2000	3000	280
	max.	6000	7000	380
250	min.	2000	3000	300
	max.	6000	7000	400
320	min.	2000	3000	360
	max.	6000	6000	450
480	min.	2000	3000	480
	max.	5000	5000	560
500	min.	2000	3000	500
	max.	5000	5000	590

Movable Workstation Crane, Single Bridge with ICR ^{*)}				
Capacity [RC] (kg)	Bridge Width (mm)	Track Length (mm)	Wheel Load (kg/wheel)	
30	min.	2000	3000	120
	max.	6000	8000	180
60	min.	2000	3000	140
	max.	6000	8000	210
100	min.	2000	3000	170
	max.	6000	8000	250
125	min.	2000	3000	210
	max.	6000	8000	300
160	min.	2000	3000	220
	max.	6000	8000	330
180	min.	2000	3000	240
	max.	6000	8000	350
240	min.	2000	3000	290
	max.	6000	7000	380
250	min.	2000	3000	310
	max.	6000	7000	400
320	min.	2000	3000	360
	max.	6000	6000	450
480	min.	2000	3000	480
	max.	5000	5000	560
500	min.	2000	3000	500
	max.	5000	5000	590

^{*)} Internal Conductor Rail

Movable Workstation Crane, Two Bridges ^{*)}				
Capacity [RC] (kg) ^{**}	Bridge Width (mm)	Track Length (mm)	Wheel Load (kg/wheel)	
30	min.	2000	3000	150
	max.	6000	8000	260
60	min.	2000	3000	190
	max.	6000	8000	320
100	min.	2000	3000	240
	max.	6000	6000	380
125	min.	2000	3000	300
	max.	6000	6000	470
160	min.	2000	3000	320
	max.	6000	6000	500
180	min.	2000	3000	340
	max.	6000	5000	510
240	min.	2000	3000	420
	max.	6000	5000	600
250	min.	2000	3000	450
	max.	6000	5000	640

^{*)} Two identical bridges

^{**} Max. capacity per bridge

	Total Height H (mm)	Internal Height H1 (mm)	Lifting Height LH (mm)	Brace Height H2 (mm)	Track Length L (mm)	Internal Length L1 (mm)	Bridge Width W (mm)	Bridge Span S (mm)	Internal Width W1 (mm)
Min. ^{*)}	3315	2922	2484	2190	3000	2420	2000	1860	1780
Max. ^{*)}	3440	3210	2883	2200	8000	7420	6000	5890	5780

^{*)} Depending on the capacity, crane dimensions, raised bridge option, and profile sizes


Movable Workstation Crane, Two Bridges ^{*)} with ICR ^{***}

Capacity [RC] (kg) ^{**}	Bridge Width (mm)	Track Length (mm)	Wheel Load (kg/wheel)
30	min.	2000	3000
	max.	6000	8000
60	min.	2000	3000
	max.	6000	8000
100	min.	2000	3000
	max.	6000	6000
125	min.	2000	3000
	max.	6000	6000
160	min.	2000	3000
	max.	6000	6000
180	min.	2000	3000
	max.	6000	5000
240	min.	2000	3000
	max.	6000	5000
250	min.	2000	3000
	max.	6000	5000

^{*)} Two identical bridges


^{**} Max. capacity per bridge

^{***} Internal Conductor Rail

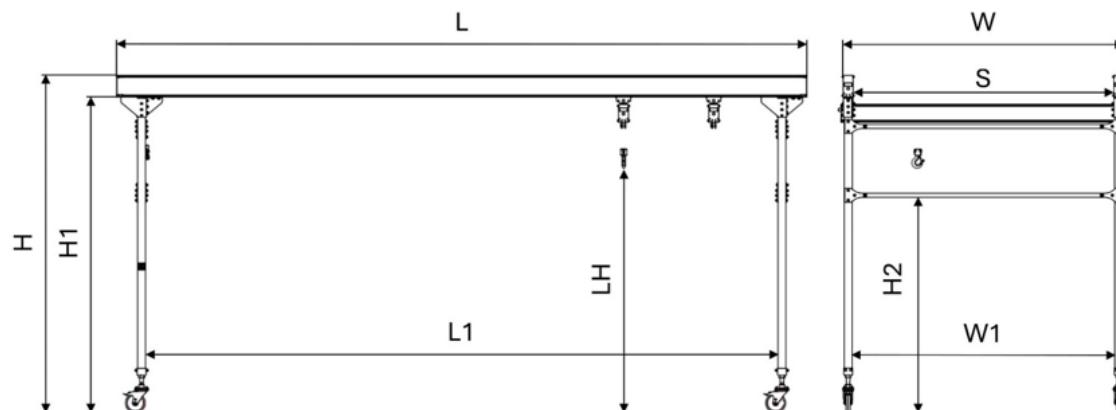


Single Bridge

Max. capacity

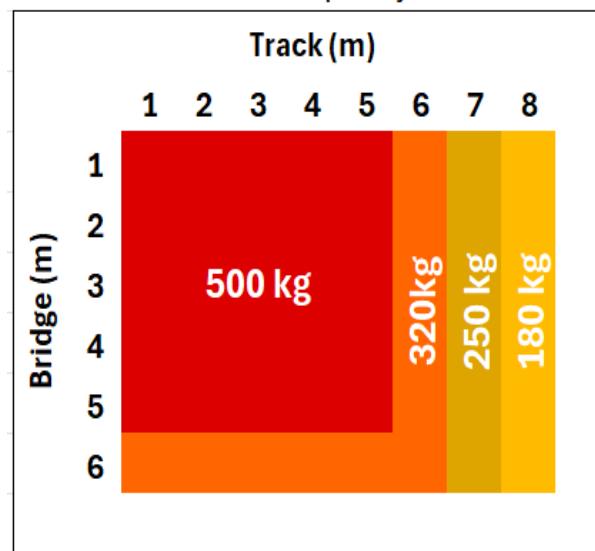


Two Bridges

Max. capacity per bridge (kg)

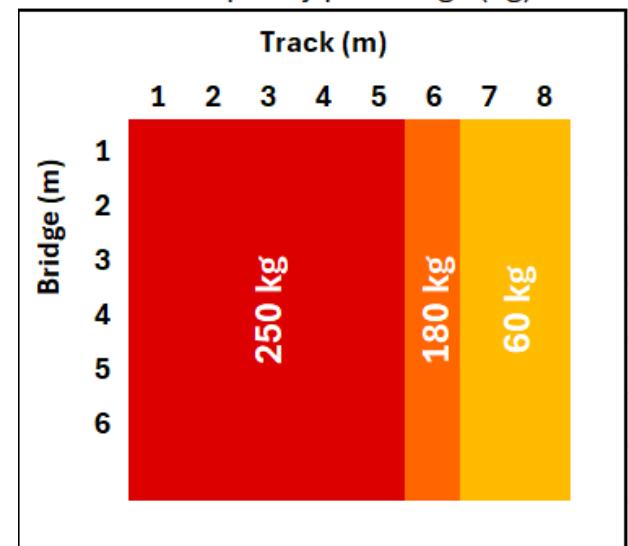

MOVABLE PORTAL CRANES

- TECHNICAL DATA

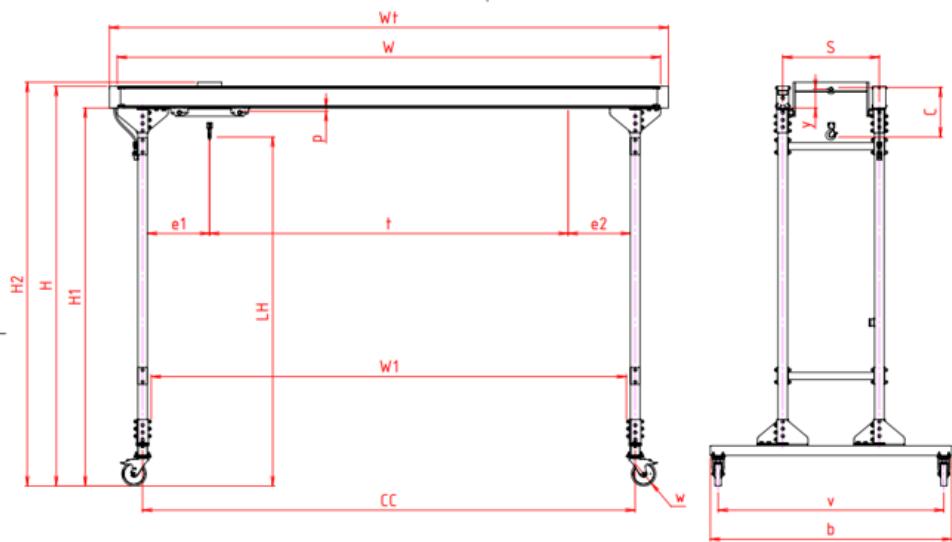

Capacity RC (kg)	Total height H (mm)	Internal Height H1 (mm)	Lifting height LH, EQ hoist (mm)	Profile length W (max. mm)	Inside width W1 (max. mm)	End girder width b (mm)	Number of girders	Weight (kg)	Profile
125	3221	3116	2694	4000	3436	1200	1	180	EAP2106
125	3256	3116	2694	5000	4436	1200	1	200	EAP3140
125	3296	3116	2694	6000	5436	1200	1	220	EAP4180
250	3221	3116	2694	3000	2436	1200	1	170	EAP2105
250	3256	3116	2694	4000	3436	1200	1	190	EAP3140
250	3296	3116	2694	5000	4436	1200	1	210	EAP4180
250	3336	3116	2694	6000	5436	1200	1	220	EAP5220
500	3256	3116	2679	3000	2436	1200	1	190	EAP3140
500	3296	3116	2679	4000	3436	1200	1	200	EAP4180
500	3346	3126	2886	6000	5436	2000	2	480	EAP5220
1000	3339	3126	2831	3000	2436	2000	2	420	EAP3140
1000	3339	3126	2831	4000	3436	2000	2	450	EAP4180
1000	3346	3126	2831	5000	4436	2000	2	480	EAP5220

ERIKKILA 1000 kg



PORTAL CRANE

RELIABLE LIFTING. BUILT FOR MOVEMENT.

The Portal Crane is designed for operations that require flexibility. Its movable design enables you to position lifting power precisely where it's needed, saving time, and streamlining workflow throughout your workspace.

With four lifting capacities (125 kg, 250 kg, 500 kg, and 1,000 kg) and two girder options, the crane can be customized to meet your specific requirements. You can configure the Portal Crane according to your desired width, power supply setup, and choice of hoist. A fully manual version is also available. Whether you're rearranging your workspace or adapting to a new project, the Portal Crane can easily accommodate your needs.



FLEXIBLE LIFTING — WHERE YOU NEED IT



Movable lifting power

- **Work smarter:** Move the crane between workstations with ease*
- **Stay efficient:** One power plug, no trailing cables, no setup delays
- **Safe and stable:** Wheel locks on all casters keep the crane firmly in place
- **Quick setup:** Universal brackets allow fast installation and configuration
- **Smooth handling:** High-quality swivel casters ensure easy positioning even in tight spaces

Movability isn't just a feature — it's a productivity advantage. Let your tools move with your work.

*Note: The portal crane must not be moved while carrying a load.





SUSTAINABILITY

Our key priority, alongside our customers and partners, is to create more sustainable lifting and material flow solutions. We are committed to reducing waste—whether in resources, energy, or time—by optimizing both our manufacturing processes and product designs.

ERIKKILA



 **KITO CROSBY™**

ERIKKILA OY

Masalantie 225

02430 Masala, Finland

Tel. +358 9 2219 050

sales.erikkila@kitocrosby.com

www.erikkila.com



© ERIKKILA OY

ERIKKILA OY reserves the right to modify product specifications, make changes, or discontinue products at any time.

DOC0700301KE - 250905