
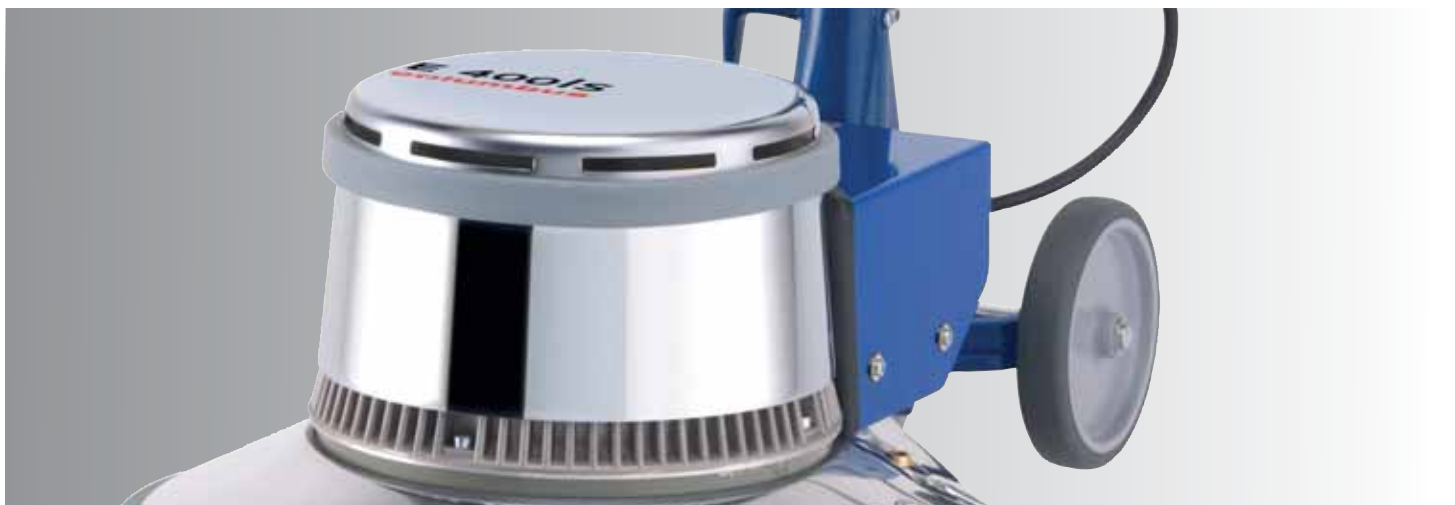


TEXTILE FLOOR CLEANING THAT LASTS.
CARPET CARE STEP BY STEP

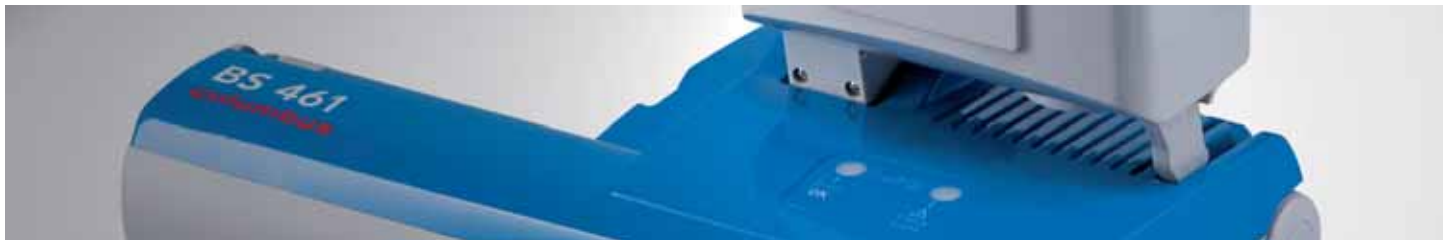

PRESERVE THE VALUE OF YOUR TEXTILE FLOOR COVERING. IN THREE STEPS. CLEAN PLANNING. WITH PREDICTABLE COSTS.

Textile flooring has lots of advantages: They are downright durable, radiate comfort, dampen noise, warm the feet as well as the atmosphere and facilitate decorative variations no matter what the type of property. The most important aspect is that carpeting is much more hygienic than is widely believed. Dust and other allergens remain settled on the floor until the next time the carpet is cleaned.

In order to preserve these positive traits, proper care is in order. This comprises a cleaning plan in three steps: daily, intermediate and deep cleaning. With professional columbus equipment for small, medium and larger surfaces. For the best appearance, long-lasting value retention and predictable costs.

Daily cleaning

Surface dust and dirt particles must be removed daily. That is the first step to beautiful textile floor coverings that last. columbus upright and vacuum cleaners innately provide ideal conditions: robust construction, powerful suction, low noise output and good ergonomics for fatigue-free working. With the right attachments, all models can be perfectly configured for the task at hand. The ST 7 vacuum cleaner and the ST11 models provide Bioneem fleece bags with anti-allergic effects for hygienic cleanliness as standard equipment.

Intermediate cleaning

For those areas that are more soiled, the second step, intermediate cleaning with the columbus Thermopad method, is recommended – for example in hallways, walkways in offices and banks, restaurants and hotel rooms or foyers. The patented, efficient and whisper quiet process is ideal for almost all types of carpet. Applying heat intensifies the cleaning solution's effects and the task is completed faster. Stuck-on dirt is removed completely and instantly leaving the floors ready to walk on again right away. Another advantage of partial or complete intermediate cleaning with the columbus Thermopad method is that step three – deep cleaning – can be put off for a long time.

Deep cleaning

Whether in the spring, the autumn or in seasonally convenient time windows, columbus has suitable methods and machines for deep cleaning at your disposal. For example two manually-operated models for cleaning small or medium-sized surfaces with spray extraction. With this method, the cleaning solution is used up in a single operation and vacuumed up with the loosened dirt. For deep down dirt, a combination of shampooing with a single disc machine and then spray extraction with clear water is recommended. Both dirt and all traces of cleaning product rinse away completely. The textile floor covering is clean down to the fibres and protected against becoming dirty again so quickly. The scrubber dryer for carpets with the best possible attachments for spray extraction and thus a wider variety of applications is the best choice for those who want to clean larger areas thoroughly and conveniently.





CLEAN QUALITY

SINCE 1926

www.columbus-clean.com

SMALL. LIGHTWEIGHT. MANOEUVRABLE. A VERY STRONG VACUUM CLEANER.

ST 7

- ⌚ The powerful professional dry vac with 7 litre fleece filter bag for everyday cleaning of textile floor coverings.
- ⌚ Extremely quiet with only 58 dB(A), for low noise vacuuming also during business hours.
- ⌚ Fatigue-free working: the air flow level can be altered infinitely according to the floor conditions, via a switch directly at the container and also at the hand tube.
- ⌚ With a weight of only 4.8 kg, compact design and storage brackets for suction nozzle and accessories the ST 7 makes transport easy and reduces storage requirements, not only within the vehicle.
- ⌚ Steady and moveable: the construction of the container and two large castor wheels at the rear ensure stability and easy tracking.

Daily cleaning

- ⌚ Ten meter plug-in mains cable in signal colour for maximum safety during operation.
- ⌚ Also suitable for hard floor coverings.



SAFE TO DRIVE. QUIET AS A WHISPER. THE ALLROUND MODEL.

ST 11

- ❶ The allround model: with a large 11 litre bioneem fleece filter bag for professional use on all textile surfaces.
- ❷ Keyword "customised": the right attachments for diverse applications.
- ❸ Steady and moveable: the innovative design with a low centre of gravity and the rubberized castor wheels at the rear of the appliance ensure stability and directional tracking capability.
- ❹ Extremely low noise with only 56 dB(A), ideal for use in noise sensitive areas.
- ❺ Fatigue-free working: the air flow can be altered infinitely directly at the container and also at the hand tube, according to the floor conditions.
- ❻ Easy to transport and always tidy: the vacuum cleaner features an ergonomic handle, the plug-in mains cable in signal colour finds its place in the cable compartment or simply on the cable-hook – swiftly locked via a sliding locking mechanism.
- ❼ Two integrated parking positions to the left or right for the combi floor tool.
- ❽ Also suitable for hard floor coverings.



LOW EMISSION AND VERY VERSATILE.
WITH EXTENSIVE WORKING RANGE.

ST 11 pro



- ❶ The ST11 pro has all good features requested for a professional vacuuming and combined among others the infinitely adjustment of the vacuum power plus brush vacuuming functions as an optional treatment of textile floor surfaces.
- ❷ Comfortably and efficient: telescopic tube infinitely adjustable as well as a 2,5 meter flexible hose and a 15 meter plug-in mains cable for a large operating radius.
- ❸ The rubber castor wheels at the front and the rubber wheels at the rear side provide for steady, low noise and secure manoeuvrability.
- ❹ The optional electrical driven brush tool can be connected easily via the integrated socket and operated through the one-hand-switch on the hand tube.

Daily
cleaning



| | ST 7 | ST 11 | ST 11 pro |
|-----------------------------------|--------------------|--------------------|--------------------|
| L x W x H | 350 x 280 x 400 mm | 390 x 300 x 410 mm | 390 x 300 x 410 mm |
| Working width | 270 mm | 270 mm | 270 mm |
| Volume fleece filter bag, class M | 7 l | 11 l | 11 l |
| Noise level (1 m) | 57 dB(A) | 56 dB(A) | 56 dB(A) |
| Weight | 4.8 kg | 6.7 kg | 6.7 kg |
| Nominal diameter | 32 mm | 32 mm | 32 mm |

ELECTRICAL DATA

| | | | |
|---------------|-------|-------|-------|
| Rated voltage | 230 V | 230 V | 230 V |
| Power max. | 720 W | 720 W | 720 W |
| Mains cable | 10 m | 10 m | 15 m |

SUCTION

| | | | |
|---------------------|------------|------------|------------|
| Low pressure max. | 222 mbar | 222 mbar | 222 mbar |
| Air flow max. | 31 l/s | 31 l/s | 31 l/s |
| Protection class | II | II | II |
| Air flow regulation | mechanical | mechanical | mechanical |

EQUIPMENT

| | | | |
|-----------------------------|-----|-----|----------|
| Telescopic tube | – | – | yes |
| Filter basket | yes | yes | yes |
| Exhaust air filter cassette | – | yes | yes/HEPA |
| Upholstery tool | yes | yes | yes |
| Crevice tool | yes | yes | yes |

| | Filter class | ST 7 | ST 11 | ST 11 pro |
|----------------------------|--------------|------|-------|-----------|
| Fleece filter bags Bioneem | M | ⊙ | ⊙ | ⊙ |
| Filter basket | H7 | ●⊙ | ○⊙ | ○⊙ |
| Filter basket | H12 | ○⊙⊙ | | |
| Protection filter motor | | ● | ● | ● |
| Exhaust filter | | ● | ● | ○ |
| Exhaust filter HEPA 14 | H14 | | ○ | ● |

Standard ● Accessory ⊙ Optional ○ Washable ⊕



BARRIER PROTECTION WITH BIONEEM. FOR THE LIFETIME OF THE BAG.

A COLUMBUS EXCLUSIVE

- For the vacuum cleaners ST 7, ST 11, and ST 11 pro: Bioneem fleece filter bags – filter class M for hypo-allergenic use.
- Bioneem acts as an invisible barrier. The mite faeces in the dust and micro-fine allergens remain safe in the bag; the filtered exhaust air is hygienically clean.
- 100 per cent economical: the tear-resistant fleece bag can be filled completely to its full capacity – at optimal suction power and air flow. And can be disposed of hygienically thanks to the closing cap.

Obtained from the seeds of the neem tree, a tropical plant esteemed for millennia for its natural medicinal properties, Bioneem (margosa extract) has a proven active combination of natural ingredients. Bioneem makes the mites' food source (skin cells) inedible thereby extensively inhibiting their reproduction. In addition to regular vacuuming of floors, mattresses and upholstery, the application of Bioneem spray contributes to a healthy atmosphere in the room. Bioneem is not toxic to humans and leaves no residues.



Daily
cleaning

**Bioneem**[®]





WORK ERGONOMICALLY, CLEAN EFFICIENTLY. WITH THE IDEAL SWEEPING HEIGHT.

XP 2 eco, XP 3 eco

- ❶ The new generation XP 2 eco and XP 3 eco are equipped with a new micro exhaust filter PP and micro hygiene filter. The three-step filtration system has been improved considerably to provide more prevention for user and environment.
- ❷ The single-motor fully automatic comfort-class vacuum cleaner cares for textile flooring as gently as it is thorough with its operating width of 370 or 440 mm.
- ❸ The brush adjusts automatically and exactly to any floor covering from high pile to needle punch carpet.
- ❹ The light models are easy to steer ensuring fatigue-free operation even over longer periods.
- ❺ Extendible tube and telescopic hose for cleaning hard to reach places are standard.



Daily
cleaning



Micro hygiene filter



Micro exhaust filter

| | XP 2 eco | XP 3 eco |
|---------------------|---------------------|---------------------|
| L x W x H | 315 x 375 x 1190 mm | 315 x 455 x 1190 mm |
| Working width | 378 mm | 448 mm |
| Working height max. | 140 mm | 140 mm |
| Noise level | 70 dB(A) | 70 dB(A) |
| Weight | 8.1 kg | 8.4 kg |

ELECTRICAL DATA

| | | |
|---------------|-------|-------|
| Rated voltage | 230 V | 230 V |
| Power max. | 890 W | 890 W |
| Mains cable | 12 m | 12 m |

SUCTION

| | | |
|--------------------|----------|----------|
| Low pressure, max. | 243 mbar | 243 mbar |
| Air flow, max. | 43,3 l/s | 43,3 l/s |

BRUSHES

| | | |
|------------------|--|-----------|
| Brush speed | 2700 rpm | 2700 rpm |
| Brush drive | Toothed belt with electronic overload protection | |
| Floor adjustment | automatic | automatic |

EQUIPMENT

| | | |
|-----------------|-----|-----|
| Crevice tool | yes | yes |
| Upholstery tool | yes | yes |
| Round brush set | yes | yes |



WORK ON LARGE SURFACES DOWN TO THE FIBRES.
DUAL MOTOR. IN TWO OPERATING WIDTHS.

BS 361 eco

BS 461 eco

- The new generation BS 361 eco and BS 461 eco are equipped with a new HEPA filter system for exhaust air. The three-step filtration system has been improved considerably to provide more prevention for user and environment.
- The dual motor carpet upright in the premium class with operating widths of 360 or 460 mm are ideally suited to quick yet careful cleaning of medium-sized to large surfaces down to the fibres.
- Both models are robustly built and are equipped with durable timing belts as well as high-performance brush and suction motors.



Daily
cleaning

- Comfortable: the vacuum cleaners are ergonomic and easy to steer thanks to powerful brush propulsion, automatic steering and four rollers. A cleaning flap facilitates maintenance.
- With their very flat construction, BS 361 eco and BS 461 eco have no problem reaching under beds and dressers.
- No tools are necessary for changing the brush strips and the release hatch opens with only light pressure.
- The electric suction brush made of high density polyethylene can be manually adjusted to four positions aligning it to pile height and carpet properties such as for Kugelgarn® or velour.
- Work without fatigue right into the corners with the long tube and extendible telescopic hose.



If the brush gets jammed, the vacuum turns off right away.



Dust re-emission class A due to HEPA filter system

| | BS 361 eco | BS 461 eco |
|---------------------|---------------------|---------------------|
| L x W x H | 260 x 360 x 1240 mm | 260 x 460 x 1240 mm |
| Working width | 360 mm | 460 mm |
| Working height max. | 90 mm | 90 mm |
| Weight | 8.8 kg | 9.4 kg |

ELECTRICAL DATA

| | | |
|---------------|-------|-------|
| Rated voltage | 230 V | 230 V |
| Power max. | 875 W | 895 W |
| Mains cable | 12 m | 12 m |

SUCTION

| | | |
|-------------------|----------|----------|
| Low pressure max. | 165 mbar | 165 mbar |
| Air flow max. | 45 l/s | 45 l/s |

BRUSHES

| | | |
|------------------|--|---------------|
| Brush speed | 3300 rpm | 3300 rpm |
| Brush drive | Toothed belt with electronic overload protection | |
| Floor adjustment | 4-fold manual | 4-fold manual |

EQUIPMENT

| | | |
|----------------------|-----|-----|
| Crevice tool | yes | yes |
| Clip for accessories | yes | yes |

THERMOPAD. THERMO-ACTIVE CARPET CARE. UNIQUE. AND ONLY FROM COLUMBUS.

Thermopad



- ❶ Patented, economical cleaning system to leave carpeted floors in offices, businesses, hotel rooms and IT centres clean and immediately usable.
- ❷ Impressive operating principle: the cleaning agent Maxil uses heat to quickly loosen even worn-in dirt, which is picked up fast and without residue by the Queen Bonnet Pad. The agitator pad allows even faster drying.
- ❸ The system works equally effectively on all kinds of carpet and contributes to maintaining the quality of the flooring.
- ❹ Whisper quiet: the machine produces very little noise when in operation and can be used during working hours.
- ❺ The heat supply can be altered by adjusting the thermostat, depending on the textile material.



Cleaning agent Maxil, Queen Bonnet Pad and Agitator Pad

Intermediate
cleaning

Thermopad

| | |
|-----------------------|---------------------|
| L x W x H | 450 x 565 x 1170 mm |
| Working width | 430 mm |
| Ground clearance max. | 135 mm |
| Working height max. | 300 mm |
| Noise level | 63 dB (A) |
| Weight | 35 kg |

- Taking care of the environment: the moistened pad allows for the deep and thorough cleaning of carpets with minimal use of cleaning agents.
- The special cleaner Maxil can be sprayed easily and evenly onto the floor with the pressure sprayer, and worn-in stains can be additionally targeted and treated.
- Expanded spectrum of uses: the Thermopad is also suitable for oiling of parquet and wooden floors – with less oil, deeper penetration and significantly shorter drying times compared to conventional methods.
- What's more, by using the Thermopad, wax stains in churches or catering areas can be quickly loosened and removed without leaving residue.

ELECTRICAL DATA

| | |
|------------------|---------------|
| Rated voltage | 230 V / 50 Hz |
| Power max. | 3050 W |
| Power heater fan | 2150 W |
| Brush motor | 900 W |
| Mains cable | 12 m |

BRUSHES AND PAD HOLDERS

| | |
|-------|---------|
| Speed | 180 rpm |
|-------|---------|



SHAMPOOING PRO PROVEN MANY TIMES OVER. WITH MAINTENANCE-FREE PLANETARY GEARS.

E 400ls

E 400ls

| | |
|-----------------------|---------------------|
| L x W x H | 415 x 550 x 1200 mm |
| Working width | 400 mm |
| Ground clearance max. | 145 mm |
| Working height max. | 300 mm |
| Noise level | 57 dB(A) |
| Weight | 40 kg |

ELECTRICAL DATA

| | |
|---------------|---------------|
| Rated voltage | 230 V / 50 Hz |
| Power max. | 1200 W |
| Mains cable | 12 m |


BRUSHES AND PAD HOLDERS

| | |
|-------|---------|
| Speed | 140 rpm |
|-------|---------|



- Versatile, robust single disc machine with metal housing and 400 mm operating width for shampooing small to medium-sized textile surfaces.
- The carpet shampoo is scrubbed in efficiently with 140 RPM and the subsequent pile rinsing uses spray extraction, for example with the SX 44 und SX 344.
- High performance again and again: the maintenance free planetary gears and the powerful motor are made for each other.
- Three non-wearing, helical planet gears transmit the power evenly over the whole operating width. These make the machine run more smoothly as well as easy to steer.
- Work with safety but without fatigue: adjustable operating handle with no pre-set levels, security button to prevent switching the machine on unintentionally.
- Large operating radius is standard: twelve-metre mains cable, water-proof and kink-proof.
- The rubber thrust collar protects machine, furniture and equipment.
- The water supply from the optional twelve-litre tank is conveniently controlled via the handle bar.


Deep
cleaning

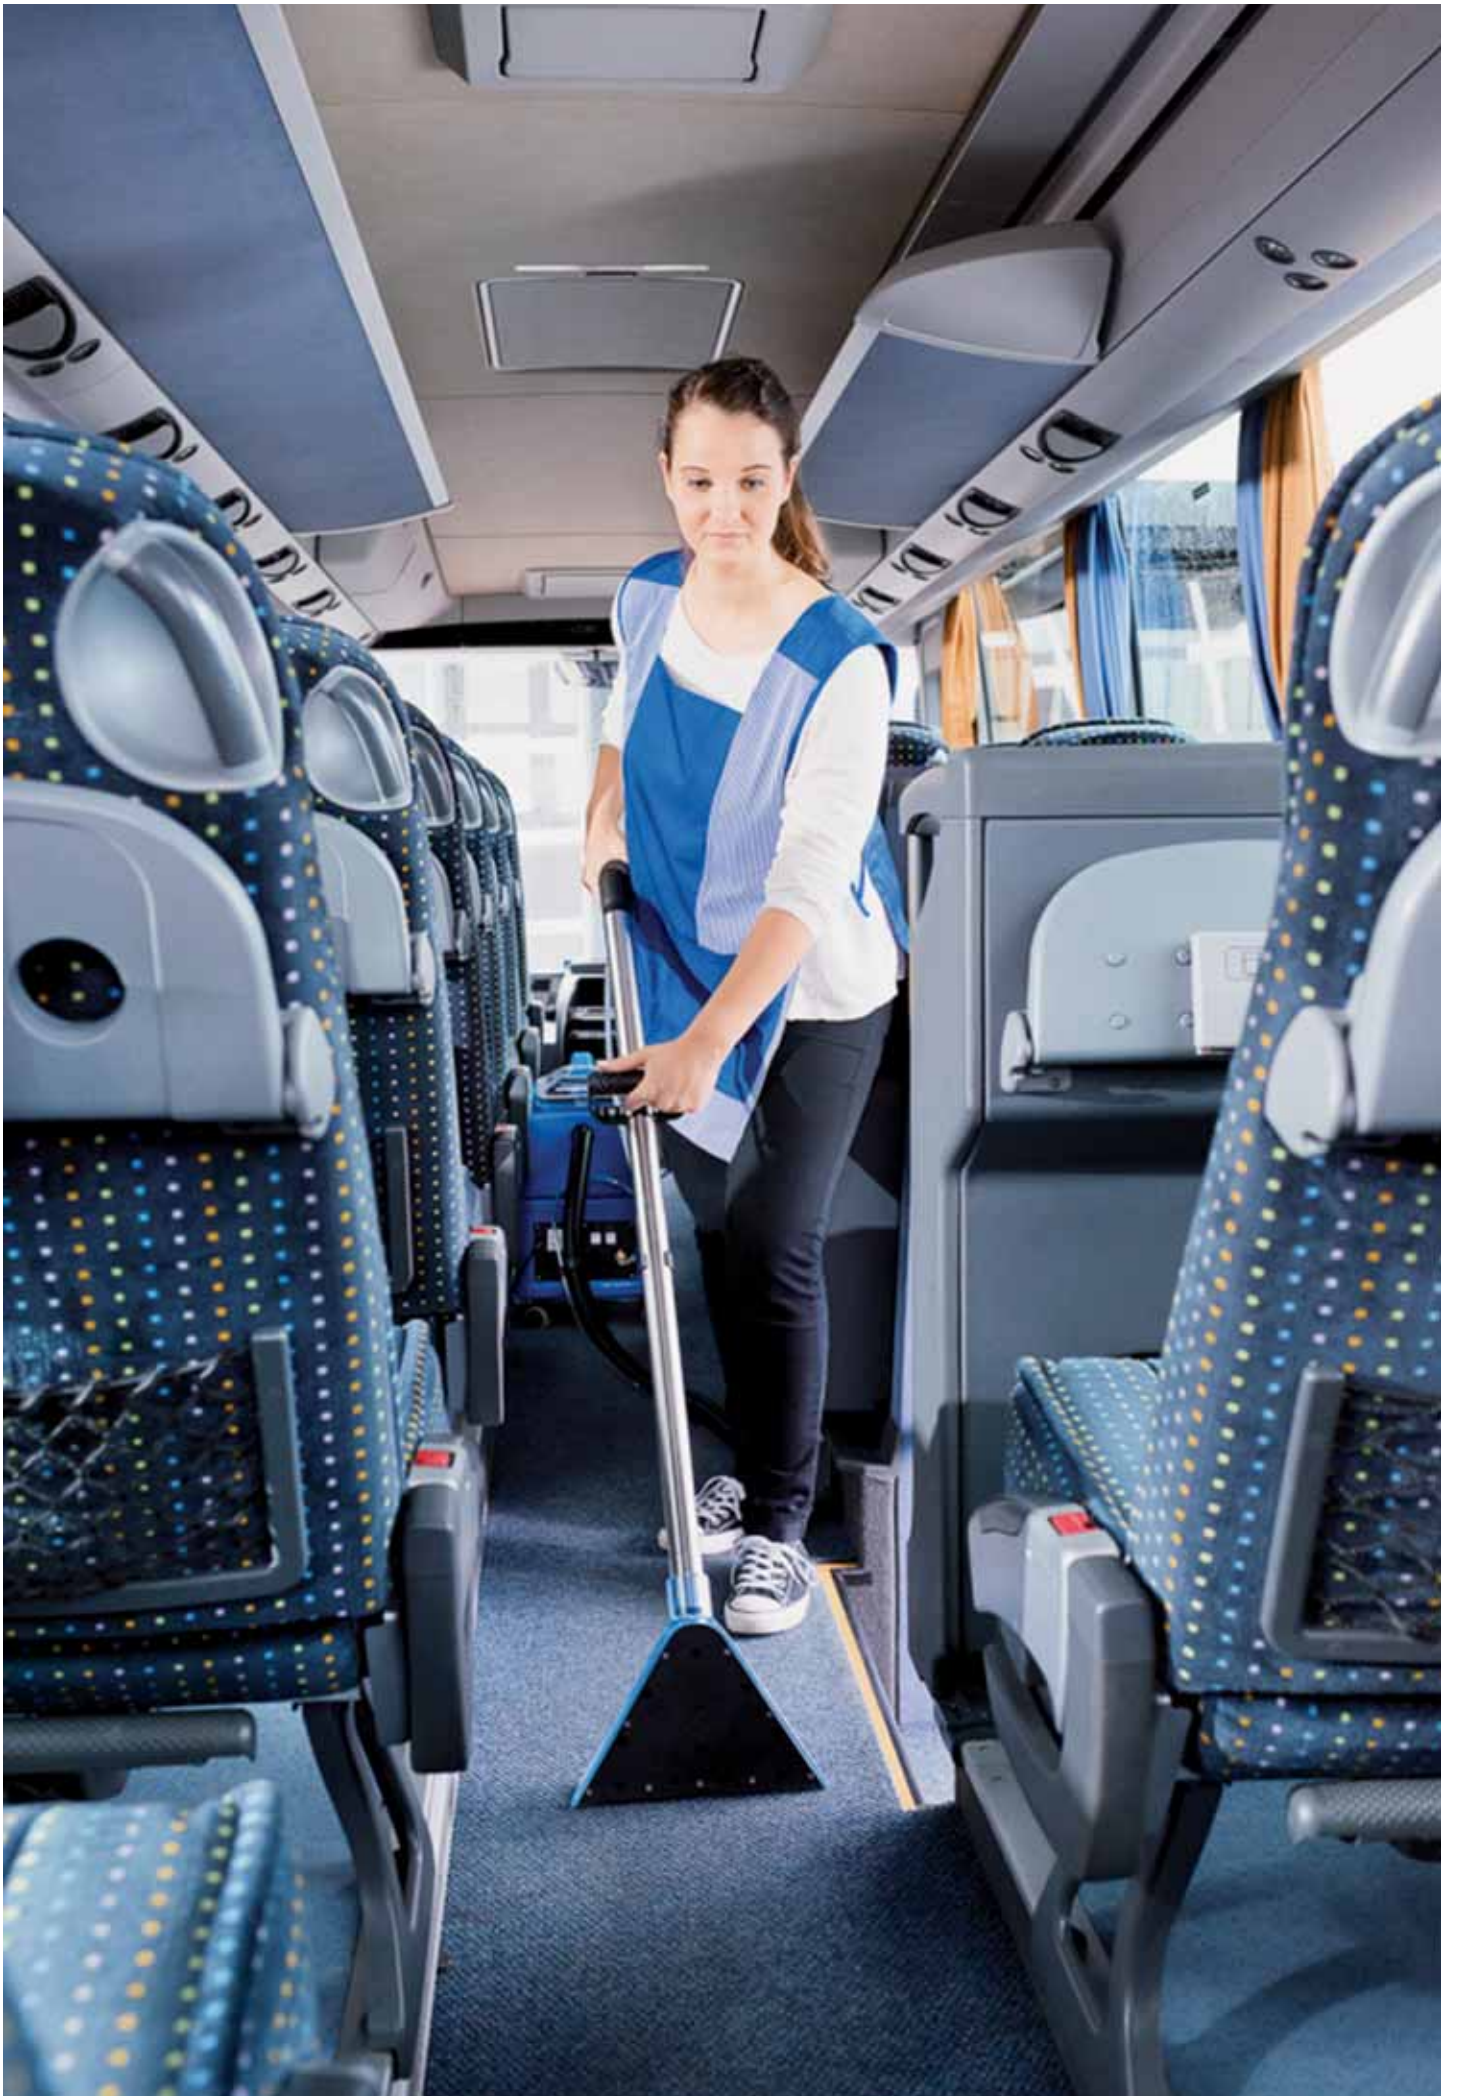

REMOVE SPOTS, CLEAN SURFACES. WITH TWO MODELS. WITH GRADED CAPACITY.

SX 44 SX 344

- Both spray extraction method machines for stain removal and deep cleaning of textile floor coverings, upholstery and hard floors are very effective. They are compact and easy to operate.
- The top-quality two-level suction motor sucks up dirt particles with 295 mbars of vacuum pressure. The surfaces dry thoroughly and can be used again soon.
- Both models have modular construction so that emptying the tank for dirty water is easy, for thorough cleaning as well as quick and inexpensive maintenance.
- Robust construction with two separate tanks made of high density polyethylene.
- Filters and seals can be removed without tools.
- The tank for the dirty water has a transparent lid allowing inspection of loosened dirt during operation.
- SX 44**
 - The light spray extraction machine for small to medium-sized furnished surfaces.
 - The spray pressure of 4 bars enables maximum cleaning performance with minimal water consumption.
 - Series standard: unbreakable adapter for synthetic flooring with three jets, aluminium spray-suction lance with grip and sturdy 2.5-metre spray-suction hose.
 - Further special attachments round out the standard fittings – such as the Combi floor tool for hard floors.



Spray extraction function

| | SX 44 | SX 344 |
|----------------|--------------------|--------------------|
| L x W x H | 300 x 420 x 530 mm | 380 x 500 x 780 mm |
| Working width | 270 mm | 300 mm |
| Spray volume | 1.5 l/min | 4.5 l/min |
| Spray pressure | 4 bar | 9 bar |
| Weight | 12 kg | 24 kg |

ELECTRICAL DATA

| | | |
|-------------|--------|--------|
| Power max. | 1570 W | 1580 W |
| Mains cable | 10 m | 10 m |

TANK

| | | |
|------------------------|------|------|
| Solution tank capacity | 14 l | 30 l |
| Recovery tank capacity | 14 l | 30 l |

SUCTION


| | | |
|-------------------|----------|----------|
| Low pressure max. | 295 mbar | 295 mbar |
| Air flow max. | 45 l/s | 45 l/s |

STANDARD EQUIPMENT

| | | |
|------------|---------|-----------|
| Floor tool | Plastic | Aluminium |
| Tube | 2.5 m | 5 m |

SX 344

- The high-performance professional appliance with 9 bars of spray pressure for medium-sized furnished surfaces.
- High-quality attachments are series standard: aluminium spray lance with ergonomic vertically adjustable grip and five-metre spray-suction hose.
- Optional: the power brush roller with rotating brush turns the SX 344 into a scrubber dryer for carpets (see illustration).



Power brush roll function



A CONVINCING SCRUBBER DRYER FOR CARPETS. AND SPRAY EXTRACTION APPLIANCE.

TA 50|K50

- Sturdy and easy to handle, the scrubber dryer for carpets takes over for professional deep and daily cleaning of medium-sized textile floor coverings and impresses with outstanding vacuuming power.
- The adjustable water quantity hits the floor with 9 bars of spray pressure.
- Brush roller and suction tool are mounted on a swivel mechanism meaning that the brush pressure can be adjusted perfectly to pile height.
- The high-quality three-level suction motor with 333 mbars of vacuum power ensures that loosened dirt is picked up without leaving residue.
- The modular construction facilitates simple emptying, all components – even the brush roller and the spray valves – can be cleaned extremely well and thoroughly without tools.
- Easy to service: seals and filters can be changed easily without tools.
- To transport in a car, simply loosen the snap locks on the dirty water tank and remove the suction jet.
- Further applications with optional attachments. The aluminium spray lance for spray extraction is perfect for cleaning hard to reach areas. Alternatively, the optional power brush can be plugged into the integrated socket.



TA 50|K 50

| | |
|----------------|--------------------|
| L x W x H | 500 x 860 x 950 mm |
| Working width | 500 mm |
| Suction width | 720 mm |
| Spray volume | 4.5 l/min |
| Spray pressure | 9 bar |
| Noise level | 60 dB(A) |
| Weight | 55 kg |

ELECTRICAL DATA

| | |
|-------------|--------|
| Power max. | 1580 W |
| Mains cable | 15 m |

TANK

| | |
|------------------------|------|
| Solution tank capacity | 50 l |
| Recovery tank capacity | 50 l |

SUCTION

| | |
|-------------------|----------|
| Low pressure max. | 333 mbar |
| Air flow max. | 45 l/s |

Deep
cleaning



