

**fs650**

### Features:

- High production performance (OEE >95%).
- Full customer service along machine life.
- Easy access for sealing system cleaning. Tool-free.
- Low maintenance.
- Main motion servomotorized.
- Long life lubrication.
- High filling accuracy controlled from HMI.
- Gas flushing.
- GMP Compliance.
- Oxygen residual analyzer.
- Remote diagnosis via ethernet.
- Independent temperature calibration of each sealing jaw from touch screen.
- CIP and/or SIP procedures.
- Transfer systems to secondary packaging equipment.
- HMI for multiple recipes.
- Automatic reel alignment.
- Expansible reel shaft.
- Possibility to have 1 or 2 tear notch on same sachet.
- Easy format change.

### Additional features:

- Laser/Thermoprinter/Inkjet/Thermotransfer.
- Vacuum/auger/elevator feeding systems.
- Non-stop automatic reel splicer.
- Anti-static bar.
- UV lamp.

### Filling system:

- Volumetric filler.
- Auger filler.
- Piston pumps.
- Flowmeter.
- Timing filler.
- Counting filler.

**fs650**

**Flat sachet**


Flat sachet multilane machine **up to 9 lanes.**

\_Our equipment

**aranow**  
packaging  
machinery



Josep Tura 11-f, Poligon Industrial Mas d'en Cisa  
E-08181 Sentmenat, BARCELONA – Catalonia  
Tel: +34 937 154 676  
Fax: +34 937 154 677  
[www.aranow.com](http://www.aranow.com)

 **Catalonia**  
Packaging machinery manufacturers

**aranow**  
packaging  
machinery


# Flat Sachet

**fs650**

Flat sachet multilane machine **up to 9 lanes**.



1. Shut-off nozzles.

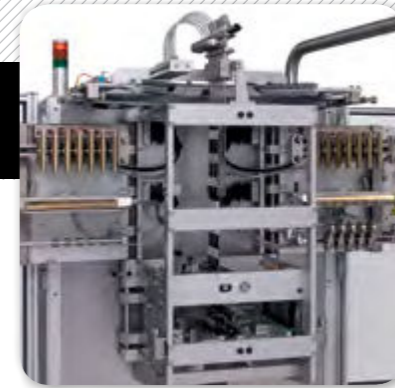

2. Side opening.



3. Easy format changing.

**Downtimes reduction** due to **user friendly and simple design**, low maintenance and easy access.

**Optimal** implementation & performance

**Personalized Customer Service** support with local technicians.

**Overall Equipment Efficiency (OEE) > 95%**



CONCEPT	DATA
Max. reel width	650 mm
Lanes number	2 - 9 lanes
Flat sachet width range	25 - 150 mm
Max. flat sachet length	150 mm*
Reel shaft	150 mm*
ø Reel max.	500 mm
Max. production	675 spm
Standard power consumption	5 kw
Standard air consumption (l./min)	180 l.

\* Other dimensions under request.



Powder, liquid in 4 side sealing.

