


# specifications

## RF7.UPR.2.SD

ReFlex Series, 2 Door (Solid), Upright Fridge

Project: \_\_\_\_\_

Item No: \_\_\_\_\_

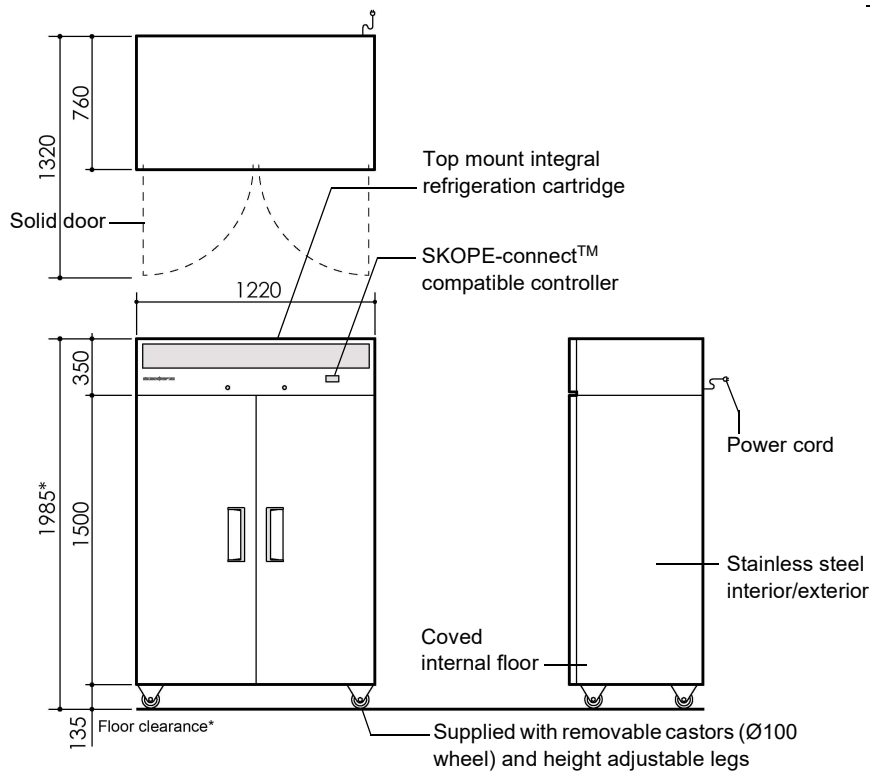

### CABINET

Doors	2 × self-closing, lockable, solid swing doors. LH, RH
Internal door opening	2 × door openings: 1375mm high × 495mm wide
Shelves	10 × adjustable height shelves: 530mm wide × 530mm deep
Worktop	n.a.
Material	304 AISI stainless steel interior and exterior

### PERFORMANCE

Max. ambient temp.	40°C
Temperature range	1°C to 4°C (adjustable with SKOPE-connect -2°C to 10°C)
GEMS class	5M1
GEMS energy consumption	3.91 kWh/24h
GEMS annual running cost	\$428 p.a. (@ \$0.30/kWh)

### ELECTRICAL

Electrical safety climate class	5
Interior lighting	2 × 1200mm, 12W LED lights (door activated)
Power cord	Supplied with 2.9m, 10 Amp plug and lead
Power supply	220-240 Volts a.c. 50 Hz, single phase supply
Current draw	2.0 Amps (includes unit 1.5 Amps)

### REFRIGERATION

Controller	SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth® wireless technology
Refrigeration system	Top mounted, integral, removable refrigeration cartridge (part number UTKCNI-0018)
Refrigerant	R290 / 90g (natural refrigerant)
Nominal capacity	650 Watts
Heat rejection (Avg/peak)	165 Watts/205 Watts
Drainage	No plumbing required

### DIMENSIONS

	External	Internal
Height	1985mm*	1395mm
Width	1220mm	1100mm
Depth	760mm	600mm
Floor area	0.93m <sup>2</sup>	
Weight	159kg	
Gross volume	921L	
Net volume	712L	

\* With supplied castors fitted. See height variation below

### Height variation

Supplied castors	1985mm
Supplied height adjustable legs	1995-2035mm
No castors or legs	1850mm

### Dimensional tolerances

Before installing this cabinet allow the following dimensional tolerances:

Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5mm	
More than 1 metre	-5mm to +10mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5mm	+15mm
More than 1 metre	-5mm to +10mm	+15mm

### Ventilation requirements

Top	300mm
Sides	Not required
Back	Not required
Bottom	Not required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

### SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: [skope@skope.com](mailto:skope@skope.com), Website: [www.skope.com](http://www.skope.com)

PSS0589 Rev. 2.11 Aug. 2020