

# MYA NARROW PASTRY



## FINISHING



## FEATURES



## COLORS





## KEY FEATURES

- **Visibility:** extraordinary enhancement of displayed products
- **Practicality:** pistons assisted front glass opening system
- **Customizable:** great possibility to customize front side panels
- **Double glazing:** front, top and side glasses
- **Energy Saving:** double LED lighting as standard
- **Multiplexing:** combine easily Mya, Mya Narrow, Mya Combi, Mya Plus together on a continuous solution

# MYA

MYA COLLECTION: CIAM's spearhead production. It is the perfect synthesis of PERFORMANCE, ERGONOMICS, ENERGY SAVING, DISPLAYED PRODUCT VISIBILITY. High performance maintains the product even in the worst ambient condition. You will be surprised by MYA's performance. MYA cabinets are tested in class 4+ (35°C / 70% HR): even in the worst ambient condition, MYA cabinets can ensure a perfect food preservation. All the upper glass structure of MYA's cabinets is realized in double glazing, to avoid the fog even in high relative humidity conditions.

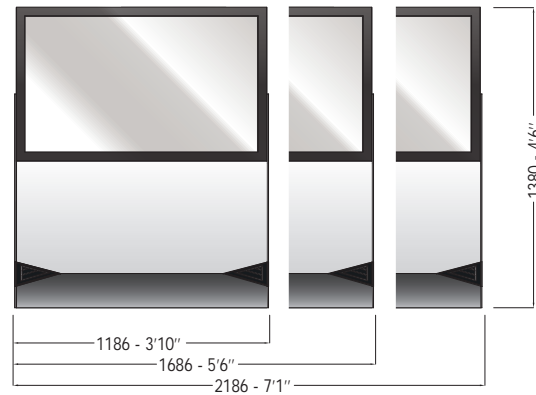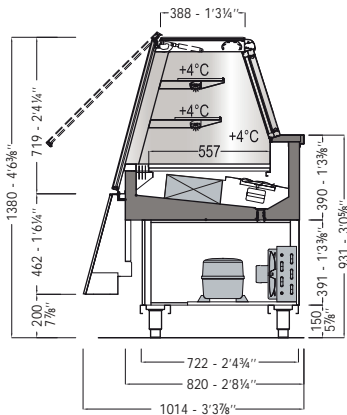

### MYA NARROW - PASTRY

TECHNICAL FEATURE		VERSIONS			
		1150	1650	2150	45° Open Corner
External dimensions (L-D-H)	inches	46 1/4" - 39 7/8" - 54 1/3"	65 1/2" - 39 7/8" - 54 1/3"	85 2/3" - 39 7/8" - 54 1/3"	85 2/3" - 39 7/8" - 54 1/3"
	mm	1186 - 1014 - 1380	1686 - 1014 - 1380	2186 - 1014 - 1380	2186 - 1014 - 1380
Crated dimensions (L-D-H)	inches	52 3/8" - 47 1/4" - 63"	72" - 47 1/4" - 63"	91 3/4" - 47 1/4" - 63"	91 3/4" - 47 1/4" - 63"
	mm	1330-1200-1600	1830-1200-1600	2330-1200-1600	2380-1200-1600
Refrigeration	Type	Fan Ventilated	Fan Ventilated	Fan Ventilated	Fan Ventilated
Refrigerated display area	Type	Deck / Shelves	Deck / Shelves	Deck / Shelves	Deck / Shelves
Operating temperature	°C / °F	+4 / 39.2	+4 / 39.2	+4 / 39.2	+4 / 39.2
Compressor	nr. / Type	1 / hermetic	1 / hermetic	1 / hermetic	1 / hermetic
Cooling power *	(W)	930	1160	1440	1100
Electric supply	(V/ph/Hz)	230/1/50 (UE)	230/1/50 (UE)	230/1/50 (UE)	230/1/50 (UE)
		120/1/60 (USA)	120/1/60 (USA)	120/1/60 (USA)	120/1/60 (USA)
Power consumption	(W/A)	1000/5,8	1200/8,5	1600/9,0	1015/6,8
Defrost	Mode / type	electric	electric	electric	electric
Climatic class	N°/°C/F°/H.R.	4+/35/95/70%	4+/35/95/70%	4+/35/95/70%	4+/35/95/70%
Refrigerant Gas	Type	R404A	R404A	R404A	R404A
Net weight	Kg / Lb	266 / 586	350 / 771	430 / 992	330 / 727
Crated weight	Kg / Lb	391 / 862	525 / 1157	650 / 1433	575 / 1267

\* At -10°C of expansion

The company reserves the right to make modifications to the products without prior notice.

CIAM s.p.a. | Viale dei Pini 9 | 06081 | Petignano di Assisi | PG - Italy | Tel: 0039 07580161  
 web: [www.ciamweb.it](http://www.ciamweb.it) | mail: [info@ciamgroup.it](mailto:info@ciamgroup.it)

2016 / v1.0