

Tenso[®] TS-702B

Fully Automatic Belt Drive
Strapping Machine

#60338



**Fastest In
It's Class**

**Multiple Strap
Functions**


**Auto Strap
Ejector**

**Electronic
Tension Control**

Designed to streamline operations and ensure secure packaging, the TS-702B offers unparalleled performance. Efficiency and reliability are paramount in production and packaging lines, which is why the TS-702B stands out as a top choice.

Features

- Fastest and most reliable in its class
- Robust & compact mechanical strapping head
- Compatible with 5mm, 6mm, 9mm, or 12mm PP strapping
- Belt-driven table for smooth operation
- Waist-high auto strap feeding
- Free access to strap guides (patents registered)
- Electronic tension control
- Auto strap ejector
- Hinged top plates
- Multiple strap function for single, double, continuous strapping, or transit mode
- Variable conveyor speed between 10 and 60 meters/minute
- Up and down stream interlock with complete plug connection
- Easy bundle flow direction change
- Good to strap small package with minimum size 120 mm in width and 10 mm in height
- Adjustable table height between 800 mm and 900 mm
- User-friendly designs for ease of use
- Single-phase power supply
- TUV CE certified for safety and quality assurance

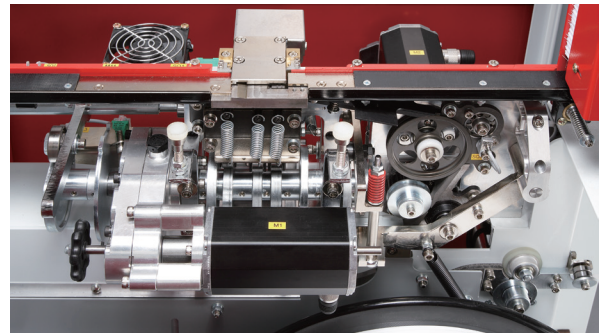

Options

- Siemens PLC
- Light tower with low strap sensor
- Energy saving transit with auto sleep mode
- Strapping in the center of the bundle
- Extension belt-driven table of 200 mm on upstream and downstream sides
- Lower adjustable table height (750 mm – 900 mm)

Specifications

Strap Width	5 mm, 6 mm, 9 mm or 12 mm
Tension Range	1-32 kg (for 5 mm, 6 mm, 9 mm) 1-45 kg (for 12 mm) *Higher tension is on request
Capacity	Up to 40 packages/minute
Cycle Speed	Up to 65 cycles/minute
Weight	225 kg
Electrical Requirements	110V, 220V, 230V, 240V 50/60Hz 1PH 220V, 380V, 400V, 415V 50/60Hz 3PH

