

21 Industrial & Floodlights>The Industrial LED Lights Die cast

**7056A/C**



LED industrial wall light with COB. High lumen output, IP65, for outdoor installation.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

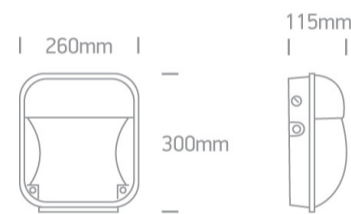

Physical Specification

Item Group	21 Industrial & Floodlights
Family	The Industrial LED Lights Die cast
Order Code	7056A/C
Colour	Black
Material	Die Cast
Diffuser Material	PC
Shape	Rectangular
Length	260mm
Width	300mm
Height	115mm
Surface Wall	Yes
Indoor	Yes

Outdoor	Yes
---------	-----

Adjustable	No
------------	----

## Electrical Characteristics

Gear	Built In
------	----------

### Fitting + Driver

Input Voltage	100-240V
---------------	----------

50 Hz	Yes
-------	-----

60 Hz	Yes
-------	-----

Safety Class	
--------------	--

Power(Watts)	50W
--------------	-----

IP Rating	IP65
-----------	------

Light Source	LED built in
--------------	--------------

Dimmable	No
----------	----

F Mark	
--------	---

### Fitting

Input Type	Constant Current
------------	------------------

Input Current	1400mA
---------------	--------

Voltage	35V
---------	-----

Power(Watts)	49W
--------------	-----

IP Rating	IP65
-----------	------

Light Source	LED built in
--------------	--------------

LED Type	SMD
----------	-----


LED Brand	Febik
-----------	-------

### Gear


Gear Type	Led Driver
-----------	------------

Input Voltage	100-240V
---------------	----------

50 Hz	Yes
-------	-----

60 Hz	Yes
Power(Watts)	37,5-50W
Power Factor	0,9
Constant Current	Yes
1250mA	30-40V
IP Rating	IP20
Safety Class	

#### Illumination Data

Colour Temperature	4000K
Lumen Output	4000lm
Light Efficiency	80lm/W
CRI	70
Beam Angle	120°
Illumination Diagram	

#### Packing Info

Box Length	28,8cm
Box Width	16,2cm
Box Height	30,8cm
Box Weight	2,9Kg
Pcs/Carton	6
Barcode	5291889040866
HS Code	9405409900

#### Energy Label



## Certification & Warranty

Warranty

3 Years

Weee Directive

Yes

switch to  
**one light!**

**one**  
LIGHT

