

## NORRIS BT600 AWC




The BT600 Advanced Wash Control model has been designed to be simple and reliable. At only 15 amps of power, this commercial passthrough dishwasher can simply be plugged into the wall.

### FEATURES

- **Warranty:** 2 years parts and labour, 5 years on the cabinet & control board (see p.26 for conditions & extended warranty offer)
- Ergonomic passthrough dishwasher
- Recirculating wash system
- Cleans up to 600 plates per hour
- Automatic detergent & rinse aid injection
- 1, 2 & 3 minute wash cycle options
- Easy to install 15 amps
- Hood safety cut off switch
- Rinse temperature accurately controlled by the thermostat function
- High grade stainless steel welded cabinet, wash arms and scrap trays for durability
- Optional drain pump
- Australian made

### INCLUSIONS

- 2 x Plate racks 500mm x 500mm
- 1 x Cup rack 500mm x 500mm
- 1 x Cutlery container
- 1 x Water connection hose
- 2 x Chemical weights & filters
- 1 x Operating manual

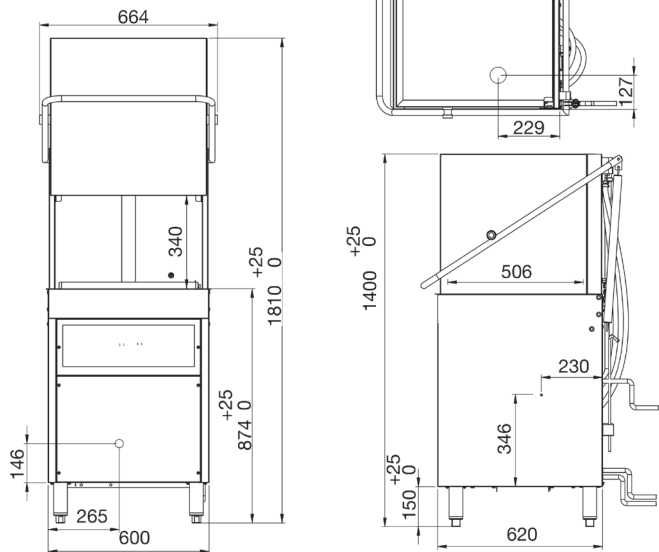

### TECHNICAL DATA

#### Height

|                    |              |
|--------------------|--------------|
| Cabinet            | 1255 mm      |
| Cabinet inc. legs  | 1405-1435 mm |
| With hood extended | 1812-1842 mm |
| Usable Wash        | 340 mm       |

#### Width

|             |        |
|-------------|--------|
| Cabinet     | 600 mm |
| Inc. handle | 680 mm |

#### Depth

|             |        |
|-------------|--------|
| Cabinet     | 620 mm |
| Inc. handle | 890 mm |

#### Capacities

|                     |           |
|---------------------|-----------|
| Loads/Hour          | up to 40* |
| Water per Cycle     | 3L*       |
| Wash Pump           | 720W      |
| Wash Tank Litres    | 22        |
| Boiler Litres       | 6         |
| Element (wash)      | 1700W     |
| Element (boiler)    | 3000W     |
| Detergent Injection | yes       |
| Rinse Aid Injection | yes       |

#### Temperatures

|                 |       |
|-----------------|-------|
| Wash Degrees C  | 62 °C |
| Rinse Degrees C | 85 °C |

#### Plumbing

|       |                                       |
|-------|---------------------------------------|
| Drain | 32mm Gravity<br>(Drain Pump optional) |
| Water | ½" BSP (hot)                          |

#### Electrical

|   |              |
|---|--------------|
| Volts/Hz  | 240V AC/50Hz |
| Max. Amp. load                                  | 15amps       |
| Note: this machine has load shedding capability |              |

\* Subject to incoming water temperature + pressure

Water pressure requirements are: 10L/min at 200-400 kPa max.