



MODEL Q90FTT/G405

CODE

CR1016429

GAS GRIDDLE WITH SMOOTH CHROME PLATE - THERMOST. CONTROL

QUEEN9

- AISI 304 stainless-steel bases and worktops, Scotch-Brite finish
- · Depth of 900 mm for high power and performance
- · Catalogue offers more than 350 standard models
- Worktop, base cabinet, base cabinet with doors and oven versions
- 20/10 worktop thickness
- Twin-piece knobs prevent infiltration of dirt and have an IPX5 water ingress protection rating
- Gas kitchens having burners with various configurations and power ratings: 3.5 kW - 5.7 kW, 7 kW and 10 kW
- · Double-ring burners for 7 and 10 kW models
- · Wide range of accessories



Technical / functional characteristics

- Lowered griddle compared to the 4 cm top and tilted towards the machine front by 1 cm to drain the fat;
- · Wide drawer for fat collection:
- · Available with soft iron griddle or polished chrome griddle.
- · Stable flame burners with piezo-electric ignition
- Independent controls every 40 cm wide module
- Temperature adjustment from 200°C to 400°C with thermocouple safety valve or from 100°C to 280°C with thermostatic valve. Adjustment is from 100°C to 280°C for the chrome version.

DIMENSIONS	
Width (mm)	400
Depth (mm)	900
Height (mm)	250
Gas connection (Ø)	3/4"
Electric connection (V/~/Hz)	
Cold water connection (Ø)	
Hot water connection (Ø)	

Cold soft water connection (Ø)	
Drain (Ø)	
Gas power (Mj/hr)	33
Electric power (kW)	
Plate dimensions (mm)	
Tank capacity (L)	
Tank dimensions (mm)	
Internal oven dimensions (mm)	



 ${\bf Email: info@scotsice.com.au - Website: www.scotsice.com.au}$



MODEL

Q90FTT/G405


CODE





SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION -ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

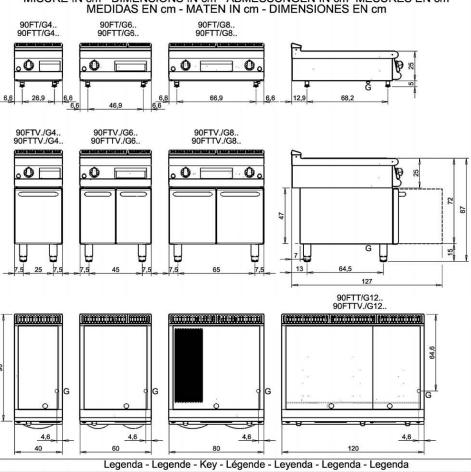

Legenda -	Legende - Ke	y - Legende -	· Leyenda -	Legenda -	Legenda

- E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico
- G Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz -Union de gas - Gasaansluiting - Ligação gás
- S Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água
- Arrivo acqua Wasseranschluss Water inlet Arrivée eau - Union de agua - Wateraansluiting - Junção
- Scarico vasca Wannenabflussrohr Pan outlet Vidange du bac -Descarga cuba - Water toevoer - Descarga da cuba
- alimentação água Calda Heiss Warm Chaude Caliente Warm Morno Fredda Kalt Cold Froid Fria Koude Frio
- S2 Valvola di depressione - Anti-depression valve - Unterdruck ventil -Soupape de dépression - Válvula de dépresión - Onderdrukklep -Válvula de depressão
- Scarico acqua intercapedine Wasserablauf Zwischenraum Jacke water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmita com Sistema de aquecimento indirecto
- Rubinetto di livello Level tap Wasserhahn Robinet de niveau Grifo de nivel Niveaukraan Torneira de nível
- Scarico Abflussrohr Drain Tuyau d'évacuation -Tubo de drenaje - Aftapbuis - Tubulação de dreno