


Compact touch ultrasound system

For small and large animal scanning

STANDARD
2
YEAR WARRANTY

Technology Driven
2-Year Warranty

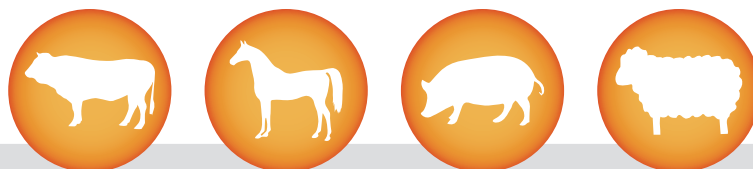

Applications

BestScan[®] S6 Touch Curve

UTECH Medical Device Pty Ltd.

www.utechmd.com.au

Email: info@utechmd.com.au



Maximum comfort while you work

- **Curved Probe:** See more, then do more, with curved probe, you get wide field of view and deeper penetration.
- **Environmental rating:** With IP67 waterproof protective case; IP67 (probe head), IP45 (main unit)
- **Touch Screen:** The first 7 inch size Touch Handheld Ultrasound Scanner Systems in China, easy using like mobile phone.
- **Grid for estimation:** With grid on the image area, you can easily estimate the size of the target substance like follicle, fertilized egg, etc.
- **Rotate Screen:** You can operate the ultrasound system either in left hand layout or right hand layout. It can automatically adapt to two different layouts when you rotate it.
- **The Exact Difference:** Linux insider with superior image quality, pseudo color imaging
- **Battery:** Continuous scan greater than 9 hours with 2 batteries, replaceable battery design
Workflow: Simplified workflow with focused on-farm veterinary exams+ multi-language support+ Rapid real time and freeze zoom from 4 to 16 cm
- **Patent design:** Rectal Linear Probe + Works with sizes of IFR™ Probe Introducer;
- **Ultrasound platform:** provides the most practical solution as a new tool for within a standard ultrasound workflow
- **Hood sheath:** Using hood sheath sunlight readable
- **Modular software:** Easy for upgrade, free lifetime upgrade to new versions
- **Storage and Export:** Images saved up to 1000 frames, and export via USB/SD supported
- **Robust Body:** Fireproofing and anti-corrosion ABS, military level+ splash proof aluminum alloy transport case

Accessories – professional your BestScan® S6 Touch Linear



Bovine Scan Curve



Bovine Scan Linear



Equine Scan Linear



Ovine Scan Convex



IFR introducer

Specification

Transducer	3.5Mhz rectal convex (128 elements, 2.0/3.5/4.5/5.5MHz)	Peripheral Ports	USB, TV-OUT (for printer, Goggles)
Viewing options	I-Scan® Video goggles	Gain adjust	Overall, near, far
Battery life	5000mAh, 4h+ working time	Battery charger	home charger, car charger
Image memory	1000 frames	Weight	1.2 kg (2.6 lbs)
Cine-Loop	512 frames	Size	260mm x 154mm x 42mm
Image export	USB/SD supported	Casing	Splash proof aluminum alloy

UTECH Medical Device Pty Ltd.

www.utechmd.com.au

Email: info@utechmd.com.au

