


LINEA 594EUSC150R36-32 RAL9002

Swivel castor with electric lock, housing made of Polyamide, precision ball bearing in swivel head, stem in short version. Wheel centre made of Polyamide, Tread made of Polyurethane, precision ball bearing, electric conductive, IPX4 in assembled position

Technical Data

Wheel diameter	150 mm
Width of Tread	15 mm
Castor width	71 mm
Bolt-Ø	32 mm
Bolt length	50 mm
Offset	47,5 mm
Swivel interference	254 mm
Overall height	155 mm
Temperature	5 / 40 °C
Standard	EN 12531
Weight	1,23 kg
Swivel radius	127 mm
Hardness of tread	A 92 Shore
Load capacity	150 kg
Load capacity (static)	300 kg

Roll performance	+	+	+	+	+
Movement noise	+	+	+	+	+
Attrition	+	+	+	+	+
Corrosion resistance	+	+	+	+	+

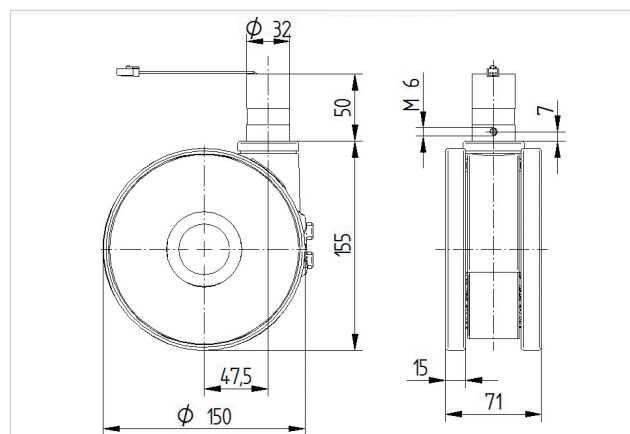

Connector plug type JST 03R-JWPF-VSLE-S

Voltage range min. 18 V DC
max. 28,5 V DC

Max. motor current 1,6 A

LINEA
594EUSC150R36-32
RAL9002

