

Lift&Drive



Lift&Drive

90-125P

 **PRONOMIC**

Lift&Drive 90-125P

Lifters based on modular design, make it suit your requirements

Our self-manufactured lift trolleys with a lifting capacity of either 90 or 125 kg. Your requirements determine the appearance of the final lifter. The light-weight trolleys are flexible and equipped with a directional lock on the rear wheels, making them maneuverable and quick and easy to turn sideways. The trolleys are very simple to use and easy to handle, and they require only very little maintenance.

The masts are equipped with a screw drive and are available in different heights. To ensure maximal safety the trolleys possess a built-in release function, which serves as protection from crushing injuries and prevents the trolley from tipping over.




Detachable manual control box



Screw drive with coaster function to prevent crushing injuries and the trolley tipping over



Central brake and directional lock on the rear wheels



Height-adjustable handlebar

90 kg




125 kg



Module-based design -

your requirements and working environment determine the final tool

- 1 Pair of legs
- 2 Electronic unit
- 3 Control box
- 4 Mast
- 5 Intermediate section
- 6 Handlebar
- 7 Charger

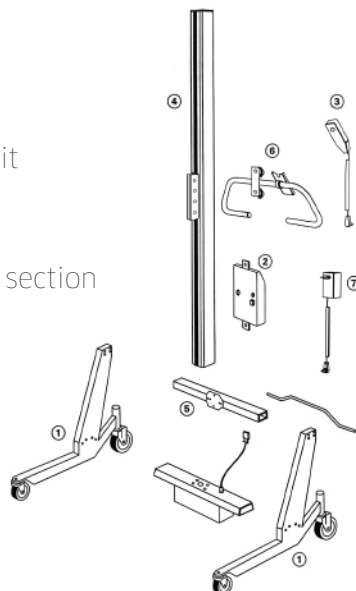

Accessories - standard or customized


Select an accessory you require from our broad range of standard tools: prong for roll handling, roll platform, lifting forks, as well as our Squeeze&Turn modules; weighing scales and counting scales, etc. We also manufacture customized tools in accordance to your specifications.



Standard loading platform



Prong for roll handling

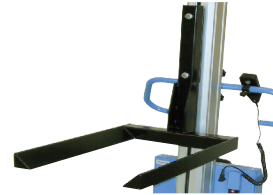

Fork



Roll platform, with front-feed




Roll platform, with side-feed



Scales



Squeeze&Turn

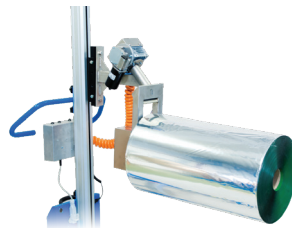

Expand&Turn - pneumatic expander, turning operated electrically



Expand&Turn - pneumatic expander, turning operated manually

Flexibility - choose mast height, and width & length of legs



Technical Specifications

Technical Specifications for Lift&Drive, 90-125P

	Overall height, standard	Overall height, low built	Total lifting height, standard	Total lifting height, low built	Length of stroke
<u>Standard</u>	<u>1732</u>	<u>1681</u>	<u>1234</u>	<u>1184</u>	<u>1192</u>
+250	1982	1931	1484	1434	1442
+500	2232	2181	1734	1684	1692
+700	2432*	2381*	1892*	1884*	1892*
+1000	2732*	2681*	2234*	2682*	2192*
Minimum lifting height			40 mm		
Overall width			733 mm to 1573 mm		
Length (without loading platform) standard, low-built			904, 881 mm		
Minimum width(outside)			490 mm		
Maximum width (outside)			1390 mm		
Loading platform (LxW), standard			420x400 mm		
Wheel diameter (front/rear) standard, low-built			100/150, 60/100 mm		
Maximum load 90P, 125P			90 kg, 125 kg		
Dead weight			From 38 kg		
Battery voltage			24 V		
Battery capacity			7.2 Ah		
Charging voltage			230VAC/50Hz or 115VAC/60Hz		
Lifting height with max. load for 90P			5.4 m/min up. 7.6 m/min down		
Lifting height with max. load for 125P			4.75 m/min up. 7.25 m/min down		
Material			Chassis in powder-coated steel		
<u>Underlined values apply for standard trolley</u>					
* = These dimensions are available for the 125P					

For further info
please contact your
sales representative

PRONOMIC AB

info@pronomic.se
www.pronomic.se



 **PRONOMIC**