



SALES DESCRIPTION

Commercial high-precision sous-vide cooker. Reliable, user-friendly, portable.

Interchangeable between °C and °F.

- Bluetooth connectivity.
- HACCP-ready.
- Optional core probe.
- Firmware update.

Portable precision cooker with stirrer for up to 30 lt. / 8 gal. containers. Deisgned for chefs, developed with chefs.

- The thick stainless steel, robust construction guarantees commercial performance. The front panel and the grip are made of fiberglass-reinforced polyamide.
- SmartVide guarantees cooking at a precisely controlled temperature while preserving the quality of the product, enhancing flavor and texture. Equipped with a highly precise temperature control system to obtain extremely consistent results.
- ✓ Allows cooking food in their own juice and using this juice immediately after cooking to **enhance flavors**.
- ✓ Marinates and macerates an ingredient in half the time.
- ✓ **Infuses and flavors** oil, fat or other products applying the controlled temperature technique.
- ✓ Increases **profits** due to lack of product shrink.
- ✓ Requires very little hands-on time, allowing the Chef to do other tasks while the product is being cooked. Just program temperature and time, SmartVide will do the rest. 4 buttons and a full-color TFT display that offers all the information at a glance makes operation a child's play.
- SmartVide5 is **portable**: thanks to their ergonomic handle, SmartVide5 can be taken from a container to another easily. Additionally, the optional bag allows easy transport - wherever the Chef goes.
- ✓ HACCP-ready: thanks to Bluetooth connectivity, it is possible to export or print cooking results at the end of each cycle.



Your appliance, always updated: free firmware update, no matter where the appliance is.

OPTIONAL

IMMERSION CIRCULATOR SMARTVIDE 5 Maximum capacity: 30 lt./ 8 gal.

- Transport bag.
- Insulated tank.Lid for insulated tank.
- Floating balls.
 - Janby Track (available through janby.kitchen).

Accessories

- Needle Probe for sous-vide cookers
- Probe Foam Seal
- Insulated tank for SmartVide immersion circulator
- □ Lid for SmartVide insulated

tanks

- Floating balls for SmartVide
- SmartVide transport bag
- Smooth bags for sous-vide cooking
- Tank dividers

SPECIFICATIONS

Temperature

Display precision: 0.01 °C Range: 5 °C - 95 °C Permissible ambient temperature: 5 °C - 40 °C

Time Resolution: 1 '

Cycle duration: 1 ' - 99 h

General features

Maximum recipient capacity: 30 l Total loading: 1600 W

Submergible part dimensions: 116 mm x 94 mm x 147 mm External dimensions (WxDxH): 116 mm x 128 mm x 330 mm

Net weight: 3.1 Kg

Crated dimensions

410 x 185 x 285 mm Gross weight: 5 Kg

AVAILABLE MODELS

| 1180101 | SmartVide 5 230/50-60/1 UK |
|---------|----------------------------|
| 1180100 | SmartVide 5 230/50-60/1 |
| 1180103 | SmartVide 5 120/60/1 |

* Ask for special versions availability


INDUSTRY KITCHENS

www.industrykitchens.com.au 1800 611 058

product sheet updated 24/05/2022



A

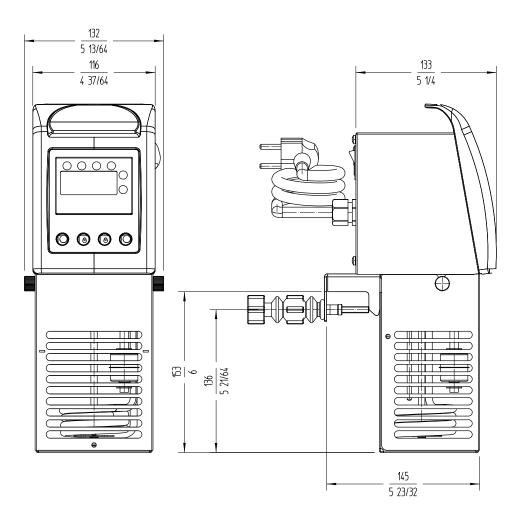

Sammic | www.sammic.com Food Service Equiment Manufacturer

Polígono Basarte, 1. 20720 Azkoitia, Spain phone +34 943 15 72 36 sales@sammic.com



| Project | Date |
|----------|------|
| Item | Qty |
| Approved | |