



www.Ablesales.com.au

SPECIFICATION

ABLE PORTABLE HYBRID ENERGY SYSTEM PAK235-125




Classified
Document
2025.04.20

PAK235-125 Commercial Energy Storage System

Item	Unit	Data		
Voltage	AC V	380	400	415
Max. output power	kVA/kW	150/150	150/150	150/150
Max. current	A	228	217	209
Continuous output power	kVA/kW	125/125	125/125	125/125
Continuous current	A	190	180	174
Overload capability		110% last 10mins, 120% last 1min (SOC>30%, AT<45°C)		
Frequency	Hz	50		
Phase	P	3		
Power factor	PF	1		
Dimensions	mm	3500x1600x2050		
Dry weight	kg	3700		
40' Loading	Qty	3		
Protection class		IP54		
Noise level	dBA@7m	58		
Wiring port		L1、L2、L3、N、PE		
Voltage regulation range		±1%		
Load adaptation characteristics		Inductive load, resistive load		
Power connection output		AC socket: 3P/4W, 1x125kW AC busbar: 3P/5W, 1x125kW AC socket 1p, 1x 16a, 1x20a ;3p 1x20a		
Power connection output		AC socket: 3P/4W, 1x125kW, DC 2x50KW		
Certification standards		 UN 38.3  IEC 62619  IEC 62477  IEC / EN 60529 EN 61000-6-1/2/3/4 AS 4777.2 G99 CE Declaration of Conformity		

Classified
Document
2025.02.08

System Working Principle

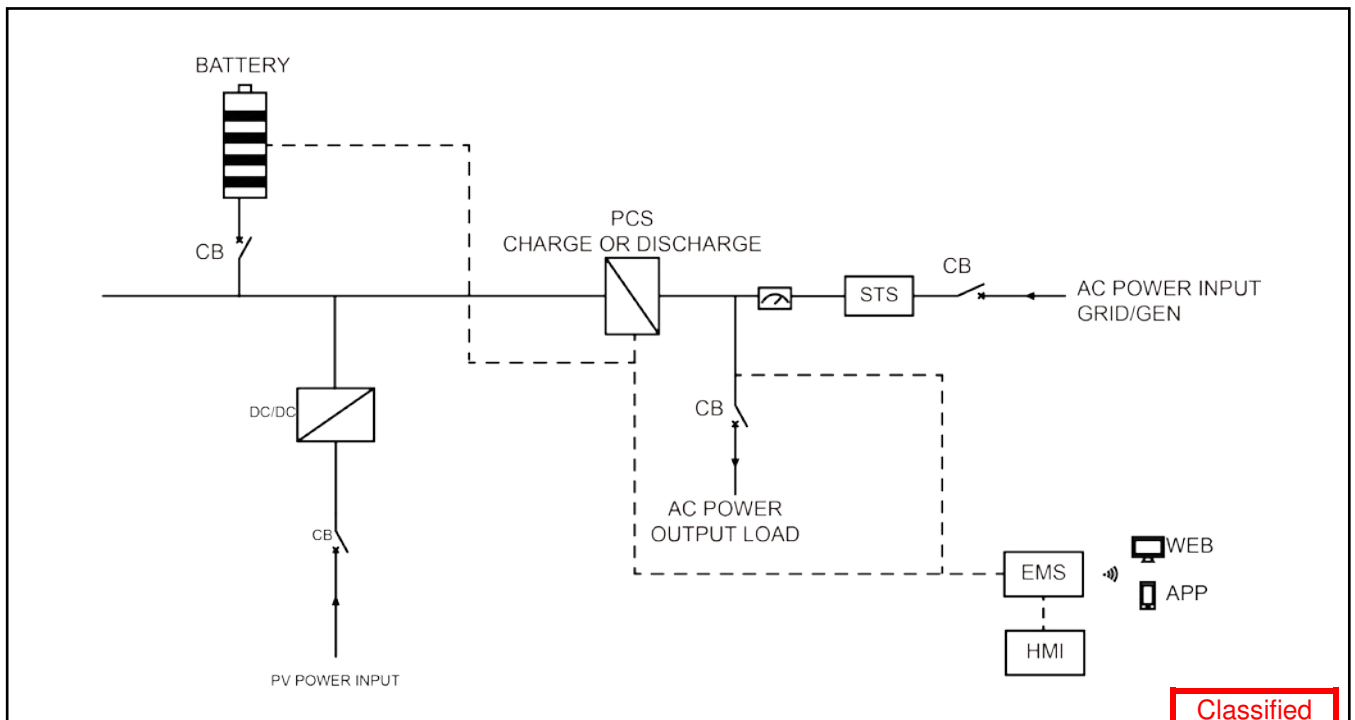

Classified
Document
2025.02.08

Intelligent Energy Management



DC/AC System		
Rated power	kVA/kW	1x 125
Output voltage	AC V	380/400/415

STS System		
Rated power	kVA/kW	1x 250
Rated voltage	DC V	380-415

PV System		
Rated power	kW	2x50
Voltage range	DC V	150-650
NOTE: Solar panels are optional.		

Grid Power Input		
Rated power	kVA/kW	125/125
Phase	P	3

Battery System		
Battery type		LiFePO4
Battery capacity	kWh	237
Cooling system		Liquid-cooled
Max charging rate		1C
Max discharging rate		1C
NOTE: The discharge power decreases as the battery SOC decreases.		

Control System		
HMI control panel	inch	13" Touchscreen
Communication interface		WAN/WIFI/SIM
Cloud services		APP/WEB

* Data is subject to change without prior notice as new products are always developed.
Please contact Able Sales or local agent with any doubts or for more information.

Classified
Document
2025.02.08