

Forklift Tow Jib Attachment EW-FJ-TOW

The EW-FJ-TOWS Forklift Tow Jib Attachment is a dual purpose, lightweight and simple to use forklift attachment which allows towing with the attached 50mm towball, and doubles as a 2000kg WLL lifting jib complete with 2T safety swivel hook. Includes two lifting hook positions and utilises two fork locking pins to secure the jib to the forks during operation.

The type EW-FJ-TOW Forklift Tow Jib Attachment has been designed as a simple Slip-on Jib attachment with 2 hook positions 585mm apart and a 50 Tow Ball fitted at the front of the Jib. Both hook positions have a WLL of 2000kg – refer diagram below. When using the Tow Bar on the forklift, the Tow weight is not to exceed 500kg and the minimum capacity of the Forklift is to be 2 Tonne.

The Unit is supplied with 2 Fork Arm Retaining Toggle Pins to prevent the Jib from moving off the Fork Arm. The Standard Finish on the Type EW-FJ-TOWS Forklift Tow Jib Attachment is Zinc Plated.

Specifications:

- Working Load Limit kg 2000kg
- Maximum Towing Capacity 500kg
- Unit Weight [Kg] 45kg
- Load Centre [mm] 1160mm
- Pocket Size [mm] 140mm x 65mm
- Pocket Centres [mm] 250mm
- Horizontal Centre of Gravity [mm] 655mm
- Vertical Centre of Gravity [mm] 30mm
- NOTE: Only suitable for 1070mm forklift tyres




Equipment Warehouse Pty Ltd

Phone No: 1800-700999 | www.equipmentwarehouse.com.au | info@equipmentwarehouse.com.au

Sydney - Brisbane - Melbourne - Adelaide - Perth

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Forklift Tow Jib Attachment
EW-FJ-TOW

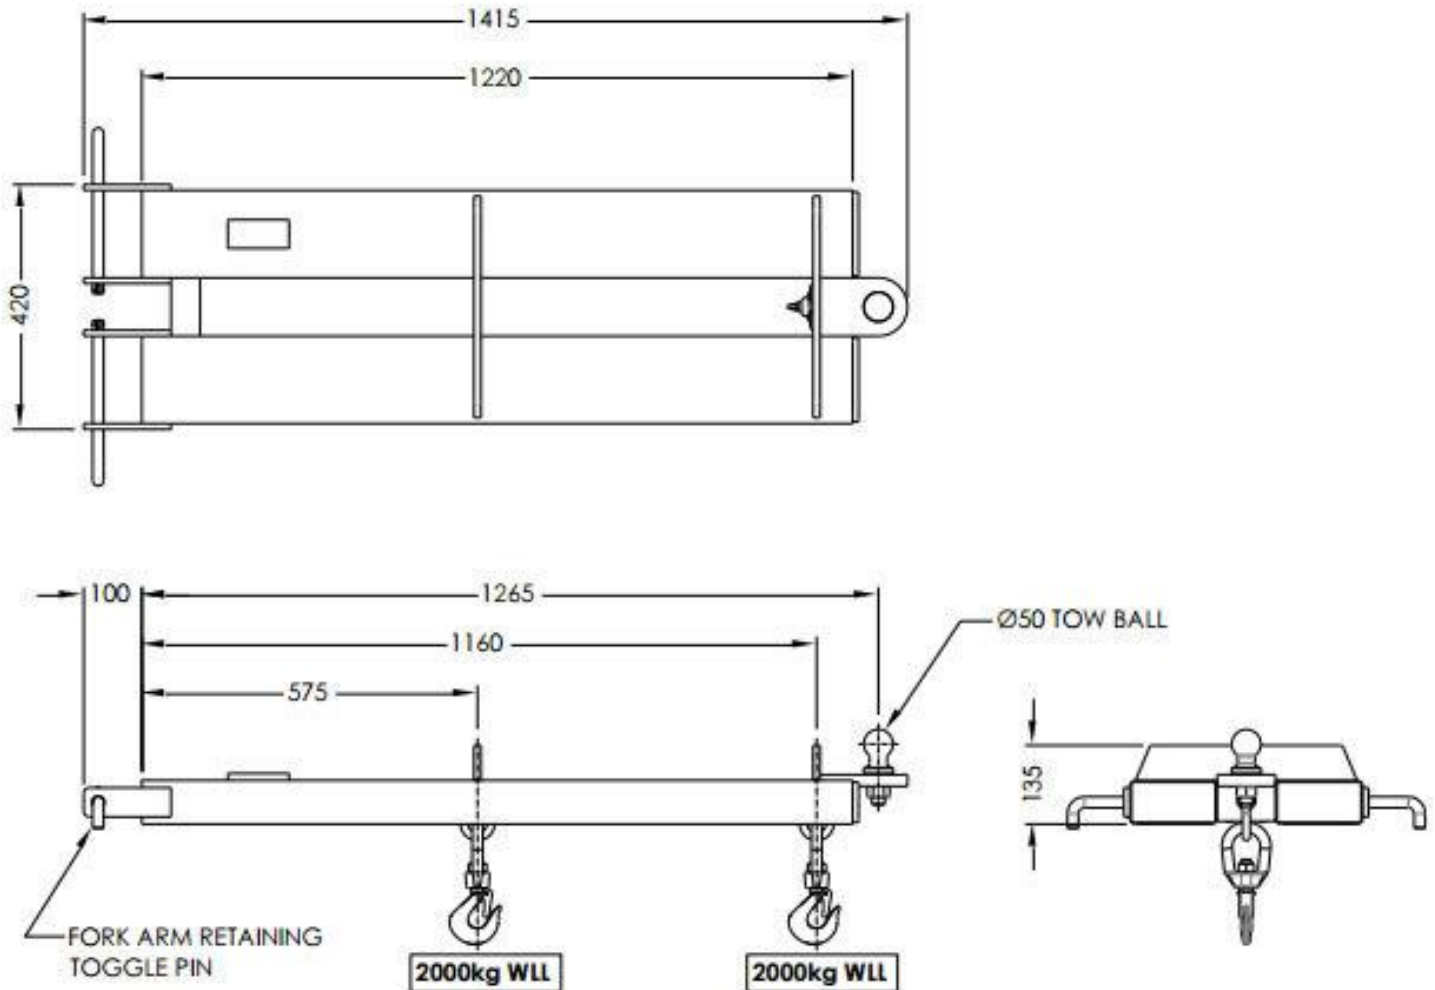

Equipment Warehouse Pty Ltd

Phone No: 1800-700999 | www.equipmentwarehouse.com.au | info@equipmentwarehouse.com.au

Sydney - Brisbane - Melbourne - Adelaide - Perth

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE