

## SPECIFICATIONS




Size	Metric	British
Max. Working Height <b>A</b>	7.6m	24ft 11in
Max. Platform Height <b>B</b>	5.6m	18ft 5in
Overall Length <b>C</b>	1.52m	5ft
Overall Width <b>D</b>	0.81m	2ft 8in
Overall Height(Rails Up) <b>E</b>	2.01m	6ft 6in
Overall Height(Rails Down) <b>F</b>	1.65m	5ft 5in
Platform Size(Length×Width)	1.37m×0.70m	4ft 6in×2ft 4in
Platform Extension Size <b>G</b>	0.60m	2ft
Ground Clearance(Stowed/Raised)	0.06m/0.015m	2in/1in
Wheelbase <b>H</b>	1.13m	3ft 9in
Turning Radius(Inside/Outside)	0.45m/1.60m	1ft 5.7in/5ft 3in
Tyres	φ230×100mm	φ230×100mm

Performance		
S.W.L	230kg	507lb
S.W.L On Extension	113kg	249lb
Max. Occupants	2	2
Gradeability	25%	25%
Travel Speed(Stowed)	4.0km/h	4.0km/h
Travel Speed(Raised)	0.6km/h	0.6km/h
Max. Working Slope	1.5°/3°	1.5°/3°
Up/Down Speed	30/23sec	30/23sec

Weight		
Overall Weight	1300kg	2866lb

Power		
Hydraulic Tank	4L	4L
Battery	2×12V/115Ah	2×12V/115Ah
Charger	24V/15A	24V/15A
Driving Motor	2×24VDC/0.5kW	2×24VDC/0.5kW
Lifting Motor	24VDC/2.2kW	24VDC/2.2kW

\* The platform height plus 2m (7ft in British standard) is the working height.  
Standards Compliance

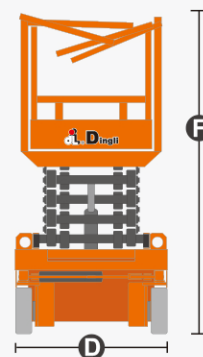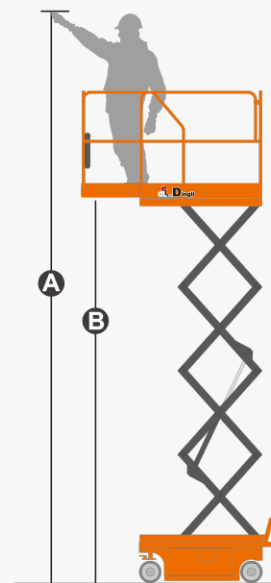

## FEATURES

### Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Non-Marking Tires
- 4×2 Drive
- Platform Load Sense System
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- One-Way Platform Extension Deck
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points

### Optional Items

- Factory Hydraulic Oil**
- No. 46 Hydraulic Oil (Mineral Oil)\*\*

### Additional Items

- GPS Unit
- Biodegradable Hydraulic Oil
- AC Power Cord to Platform
- Air Line to Platform
- Work Light Package
- Footpedal Switch
- Anti-Collision Bar on Platform

\*\* Factory Default, If You Have Other Needs, Please Inform Dingli Regional Sales.

## ZHEJIANG DINGLI MACHINERY CO., LTD.

No.188 Qihang Road, Deqing, Zhejiang P.R.China 313219

Telephone +86(572)8681688

Fax +86(572)8681960

E-Mail [export@cndingli.com](mailto:export@cndingli.com)

[Http://www.cndingli.com](http://www.cndingli.com)

