



CONVEYOR BELT SCALES PRODUCT BROCHURE

Fits any width conveyor
Easy to install
Easy to calibrate
Stays calibrated
Durable
Accurate
Repeatable



www.beltwayscales.com

ANMAR

SCALES


SCALE FEATURES

FITS ANY WIDTH CONVEYOR

The modular BELT-WAY® design is simple, yet versatile. The BELT-WAY® scale fits any width conveyor.

EASY INSTALLATION / CALIBRATION

The unique Belt-Way design is easy to install on virtually any stationary or portable conveyor. Initial setup and calibration are accomplished by using the Setup Wizard. Recalibration is easy. Follow the menu driven instructions to choose test weight, material test, or digital calibration.

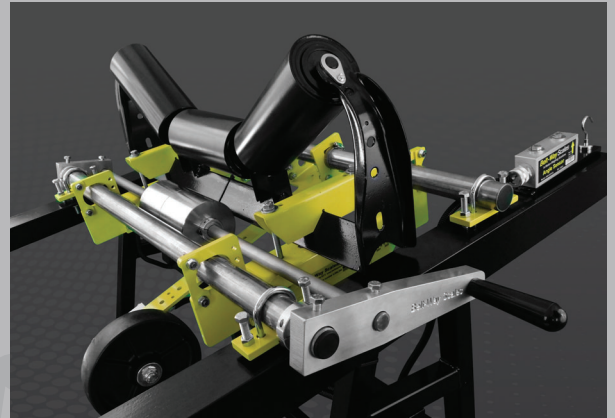

SELF-STORING TEST WEIGHT ASSEMBLY

Test Weight calibration is the most popular and convenient method of conveyor belt scale calibration. The Self-Storing Test Weight Assembly makes calibration quicker, easier, and safer. Calibrate a scale in minutes. No more handling of test weights. Weights are easily lowered, or raised, from the cradle position. Calibration is performed from the catwalk on one side with no need to access both sides of the conveyor. The Self-Storing Test Weight Assembly also allows for quick, on-screen performance verification by simply lowering weights onto the scale.

ACCURACY

The Patented BELT-WAY® Load Cell Assemblies house OIML Certified Load Cells. Expected margin of error for a Single Idler Weighing System is $\pm 0.5\%$. Expected margin of error for a Dual Idler Weighing System is $\pm 0.25\%$. Expected accuracy is based on weight range of 25% to 100% of design capacity, when installed and calibrated according to Instruction Manual guidelines.

ADVANCED WEATHERPROOF ELECTRONICS – CE

The Belt-Way Integrator (control box) features a state-of-the-art microprocessor with easy-to-read, multi-language, color graphic display. The weatherproof enclosure provides excellent E.M.I. / R.F. resistance for reliable operation. The Belt-Way Integrator is fully CE approved. Options for 110-240 VAC or 12-24 VDC control power are available. The standard Ethernet port provides Modbus TCP, and feed to the Web based Plant Connect Production Reporting System. Expanded I/O communication capabilities include 4 programmable digital inputs, 3 programmable relay outputs, and 3 programmable digital outputs.

PRODUCTION MONITORING / DATA COLLECTION

The Belt-Way Integrator is equipped with an RS-232 communication port to drive a printer or scoreboard display. The on-board USB port stores fault condition alerts, screenshots and production data files. The Remote Display shows real time information from multiple scales. The user can reset all scale totals and perform zero calibrations from this device.

APPLICATIONS

STATIONARY PLANTS

Accurate, repeatable tracking of product totals and ratios is a crucial element of plant management. The Belt-Way Conveyor Belt Scale offers high resolution weighing of all products; even low flow rate applications. The patented self-aligning weigh-bridge accurately measures the force of material, without the use of levers, linkage, or other mechanical apparatus known to produce non-linearity. The Belt-Way Scale is known for reliable performance without the need for constant recalibration.



STATIONARY

PORTABLE PLANTS

Belt-Way Scales are uniquely suited for all portable applications. Our modular design allows for installation on virtually any style conveyor, including low profile and spine conveyors. The patented weighbridge dramatically reduces the adverse effects of vibration and torque on the conveyor frame. Automatic angle compensation eliminates the need for recalibration due to a change in conveyor angle.

Daily, weekly, monthly, yearly, and resettable job totals, along with calibration and production data logs are stored on the internal USB drive for verification of production at each jobsite.



PORTABLE with ANGLE SENSOR

CATENARY IDLER APPLICATIONS

Designed for easy installation and repeatable performance, the Belt-Way Scale offers a unique solution for accurate weighing on catenary style idlers. The catenary idler scale is popular on track-mounted portable crushers and asphalt milling machines. Automatic angle compensation eliminates error due to changing conveyor angle.



CATENARY

LOAD-OUT

Rail, Barge, Truck, and ship load-out require high accuracy in the most rugged environment. On stationary conveyors and stacker / reclaim conveyors, the Belt-Way Scale is known for high accuracy at all flow rates. Applications include flow rates of up to 10,000 tons per hour. Built in load-out controls provide automated cutoff at user defined load amounts.



LOAD OUT

INDUSTRIES



AGGREGATE



MINING



AGRICULTURAL



ASPHALT



FORESTRY



CONCRETE



RECYCLING



FRACKING



STEEL

If it's worth conveying, it's worth weighing.

MONITORING

REMOTE TOUCHSCREEN DISPLAY

Monitor one or multiple scales from a central location. Reset totals and perform zero calibration on any or all scales simultaneously at the touch of a button. Wireless connection options are available.




Belt-Way Scales Inc.				05/22/2015 00:17	
	WEIGHT	RATE	SPEED	ZERO CAL	RESET TONS
CV-3 PRIMARY	517.73	905	333	ZERO CAL	RESET TONS
CV-7 CONE	373.57	218	221	ZERO CAL	RESET TONS
CV-12 1/2 IN	390.07	835	333	ZERO CAL	RESET TONS
CV-14 3/4 IN	194.34	415	300	ZERO CAL	RESET TONS
CV-18 1 IN	28.31	212	360	ZERO CAL	RESET TONS
CV-21 FINES	361.22	188	222	ZERO CAL	RESET TONS
MENU HELP SCREENSHOT DECIMAL PLACES: 2				ZERO ALL	RESET ALL



PLANT CONNECT

Access detailed production reports displaying material flow rate analysis, downtime, empty belt time, efficiency reports, and more from any internet capable device. Onsite internet or cellular options are available.

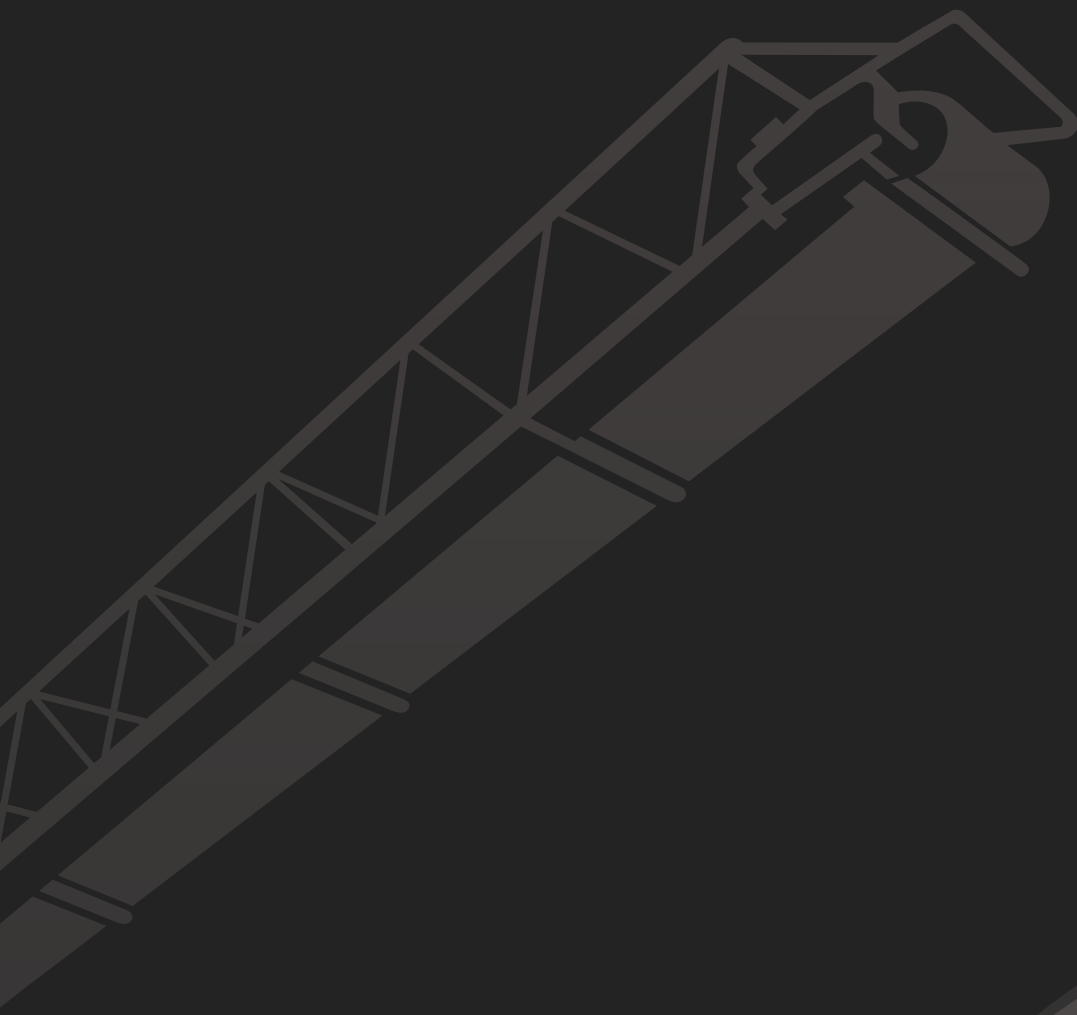

Belt-Way Scales Inc.
1 Beltway Rd
Rock Falls, IL 61071 USA

Phone: 815-625-5573 Fax: 815-625-5593
E-mail: sales@beltwayscales.com
Website: www.beltwayscales.com

Belt-Way® is a registered trademark of Belt-Way Scales, Inc.

THE BELT SCALE YOU CAN TRUST