



High Performance Engine

The Jibbi is equipped with a high performance 19.2hp 3-cylinder diesel engine.



Automatic Levelling

The Jibbi can automatically level itself on challenging terrain and steep slopes.



Retractable Undercarriage

The undercarriage of the boom lift is retractable from 1.95m to 1.15m.



Anti-Collision Alarm

An alarm will sound when you are approaching obstacles above or below the basket.





Detachable Basket

The basket on the Jibbi is detachable, allowing the boom lift to be more compact and versatile.



Removable Control Box

The operator controller comes with an integrated drive system with joystick controls.

12.2m

230kg

8.2m

19.2_{Hp}

+/-15°

+/-15°

WORK. HEIGHT

CAPACITY

H. OUTREACH

POWER

LONG. LEVEL.

LATER. LEVEL.










JIBBI 1270 EVO TECHNICAL DATA

Basket capacity	230 kg (2 op.)
Max working height	12.2 m
Max height basket floor	10.2 m
Moving height	8.0 m
Max horizontal outreach (80kg)	8.2 m
Max horizontal outreach (230kg)	6.5 m
Rotational angle	+/- 110°
Basket size	1.8 x 0.7 m
Platform rotation angle	+/- 70°


	, ,
Basket rotational angle	+/- 70°
Length in stowed position Detached basket	3.8 m 3.0 m
Min. Stowed width	1.15 m
Max. Working width	1.95 m
Longitudinal levelling	+/- 15°
Lateral levelling	+/- 15°
Gradeability	25°
Drive speed (fast setting)	2.5 km/h
Drive speed (slow setting)	0.3 km/h
Total weight	3600 kg

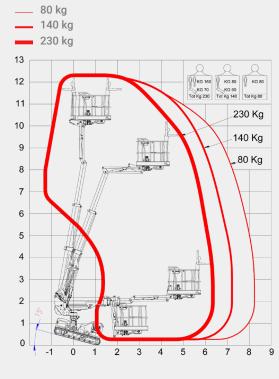



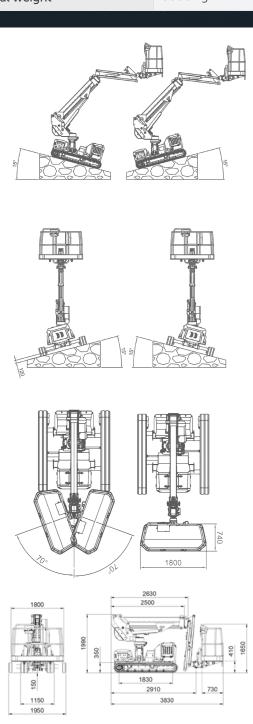



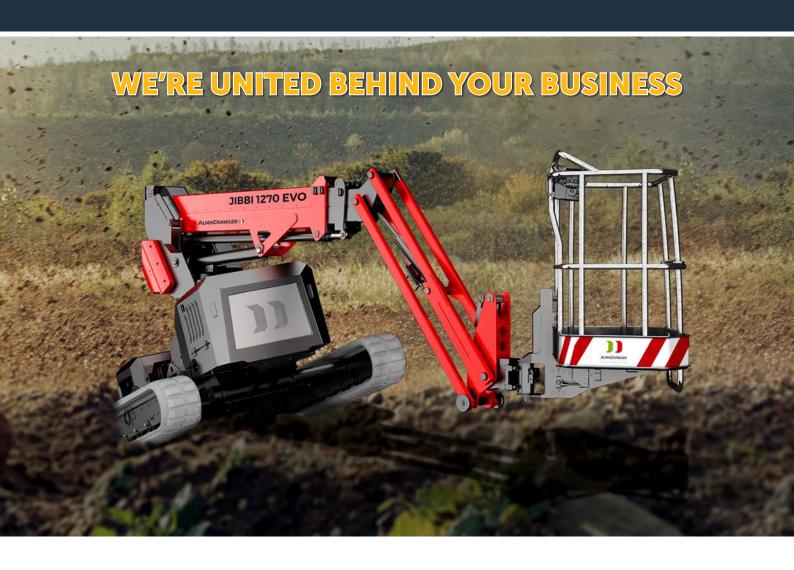

T: 131 607

unitedequipment.com.au

SALES | RENTALS | SERVICE | PARTS | FINANCE | TRAINING

WE BRING MORE OF THE WORLD'S BEST TO YOU



KONECRANES°

Haulotte >>

ALMACRAWLER))



Perth Bunbury Darwin

Adelaide

Brisbane Mackay Rockhampton Sydney

Melbourne Ballarat

Burnie