

## AF Series Self Contained Flake Ice Machine - up to 68kg **AF 87 AS OX** Flake Ice



Flake ice




Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.

- Up to 68kg daily production rate
- 25kg storage bin capacity
- Air cooled version
- XSafe - Natural Sanitation System
- Stainless steel auger and freezing cylinder evaporator
- Water in / ice out concept limits excess energy, water and time wastage
- Agion Technology resists the growth of microbes and the development of unpleasant odours
- Simple, reliable electromechanic controls
- Clean alert indicator to clean filter
- Resistant stainless steel exterior
- Easy access front condenser air filter
- External indicator lights to show operation status
- Includes removable air filter, ice scoop, water and drain hose



### AF Series Self Contained Flake Ice Machine - up to 68kg

#### AF 87 AS OX

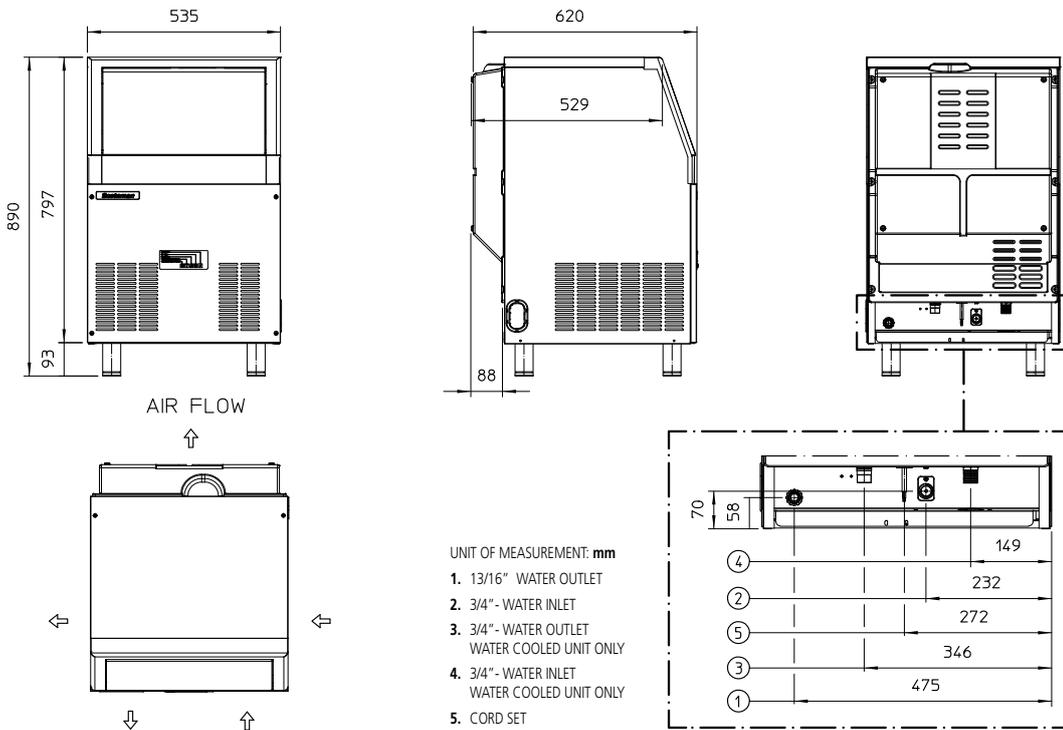

moffat.com.au

Australia  
Moffat Pty Limited  
Victoria/Tasmania  
740 Springvale Road  
Mulgrave, Victoria 3170  
Telephone 03-9518 3888  
Facsimile 03-9518 3833  
vsales@moffat.com.au

New South Wales  
Telephone 02-8833 4111  
nswsales@moffat.com.au

South Australia  
Telephone 03-9518 3888  
vsales@moffat.com.au

Queensland  
Telephone 07-3630 8600  
qldsales@moffat.com.au

Western Australia  
Telephone 08-9413 2400  
wasales@moffat.com.au

#### Ice production per 24 hours

Ambient temperature / Water temperature

| 10°C / 10°C | 21°C / 10°C | 32°C / 21°C |
|-------------|-------------|-------------|
| 70          | 68          | 56          |

#### Dimensions

Width: 535mm  
Depth: 620mm  
Height: 890mm (including legs)  
Nett weight: 50kg  
Packed weight: 58kg

#### Water consumption

Air cooled version: 2.4 litres per hour

#### Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 275W,  
10A cordset supplied  
No. Circuit wire: 3  
Compressor: 200W  
Energy consumption: 6.2kW/24hr

#### Refrigerant type

R290

#### Installation distance from wall

Rear 100mm  
Sides 150mm  
Operating requirement air temperature 10-43°C

#### Water connection requirements

Inlet connection: R 3/4"  
Cold water: 5-35°C  
Pressure: 100-500kPa  
Water outlet connection: Ø3/4"

#### Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.



© Copyright Moffat Ltd  
AU.SM.2301