

21 Industrial & Floodlights>The Industrial LED Lights Die cast

7056/C



LED industrial down light with COB LED. High lumen output, IP65, for outdoor installation.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

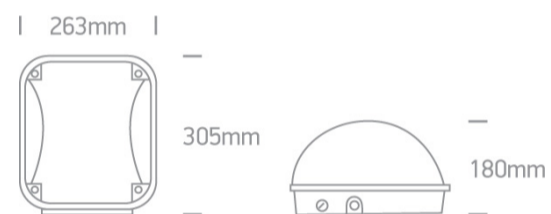

Physical Specification

Item Group	21 Industrial & Floodlights
Family	The Industrial LED Lights Die cast
Order Code	7056/C
Colour	Black
Material	Die Cast
Shape	Rectangular
Length	263mm
Width	305mm
Height	180mm
Surface Ceiling	Yes
Surface Wall	Yes
Indoor	Yes

Outdoor

Yes

Adjustable

No

Electrical Characteristics

Gear

Built In

Fitting + Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

50W

IP Rating

IP65

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

1400mA

Voltage

35V

Power(Watts)

49W

IP Rating

IP20

Light Source

LED built in

LED Type

COB

LED Brand

Epistar

Gear

Gear Type


Led Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz	Yes
Power(Watts)	34-50W
Power Factor	0,9
Constant Current	Yes
1400mA	24-36V
IP Rating	IP20
Safety Class	


Illumination Data

Colour Temperature	4000K
Lumen Output	4000lm
Light Efficiency	80lm/W
CRI	70
Beam Angle	120°
Illumination Diagram	

Packing Info

Box Length	28,8cm
Box Width	16,2cm
Box Height	30,8cm
Box Weight	2,9Kg
Pcs/Carton	4
Barcode	5291889045397
HS Code	9405409900

Energy Label

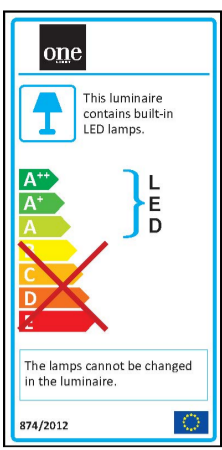

Certification & Warranty

Warranty

3 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

