


**Telescopic Crane Spreader Beam 5000 Kg 2600mm  
 EW-CEXL-1726Q**

The EW-CEXL1726 Crane Spreader Beam is designed to lift long loads via the centre single hook point as a 'Lifting Beam', or end lifted using a 2 leg chain sling as a 'Spreader Beam' with a truck mounted or overhead crane.

**Features:**

- Multi-tasking spreader beam
- Used as a 'Lifting Beam' by using the centre hook point
- Used as a 'Spreader Beam' when using the end hooks with a 2 leg chain sling
- Retaining saddle brackets supplied for storage on truck trays
- Load connection points are adjustable to 3 positions
- Safety pins used to securely lock extendable arm in position
- Fitted with 2 safety swivel hooks
- Certified to the relevant Australian Standards
- Zinc finish on extendable arms, enamel paint finish on main body

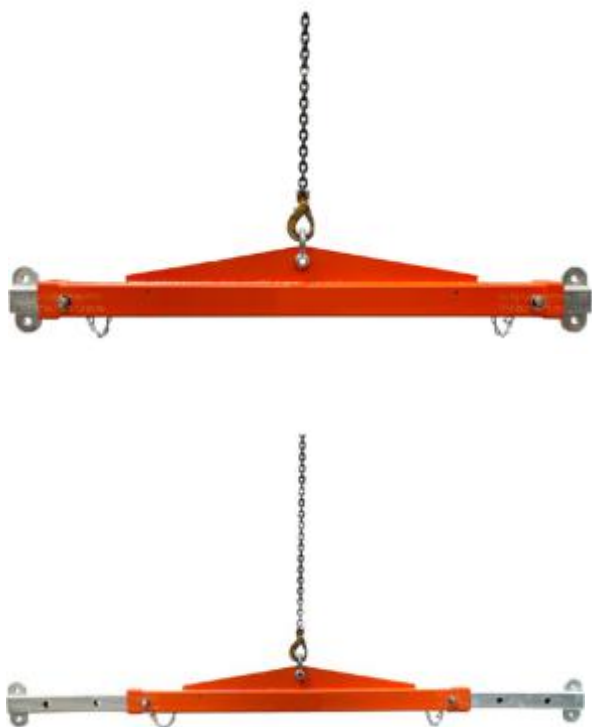

When used as	Fully-Retracted (LC@1700mm)	Middle Position (LC@2150mm)	Fully Extended (LC@2600mm)	Unit Weight
Length	1775mm	2225mm	2675mm	70KG
Lifting Beam	3000KG	2000KG	1000KG	
Spreader Beam	5000KG	5000KG	5000KG	

**Equipment Warehouse Pty Ltd**

Phone No: 1800-700999 | [www.equipmentwarehouse.com.au](http://www.equipmentwarehouse.com.au) | [info@equipmentwarehouse.com.au](mailto:info@equipmentwarehouse.com.au)

Sydney - Brisbane - Melbourne - Adelaide - Perth

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE