
specifications







ReFlex Series, 3 Door (Solid), Medium Pizza Preparation Fridge

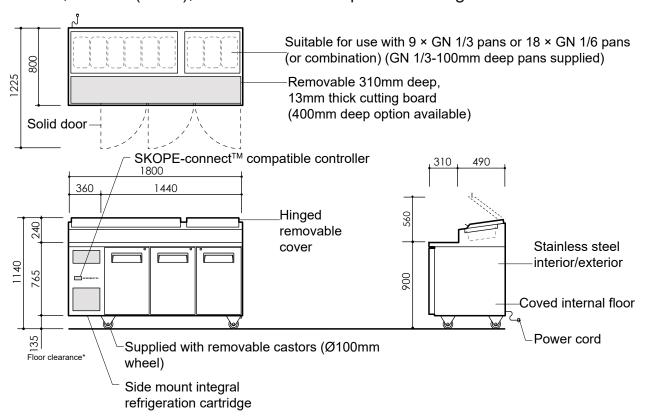

CABINET

Doors 3 × self-closing, lockable, solid swing door with stay-open position at over

90°, hinged LH, LH, RH.

3 × door openings: 590mm high × 370mm wide Internal door opening

6 × adjustable height shelves: Middle shelves: 475mm wide × 610mm Shelves

deep. Outside shelves: 415mm wide × 610mm deep. Each shelf is held in place with four shelf clips, and additional shelf clips available on request.

Worktop Removable, food grade, 13mm plastic cutting board

304 AISI stainless steel interior and exterior Material

PERFORMANCE

Max. ambient temp.

Temperature range 1°C to 5°C (adjustable with SKOPE-connect 0°C to 15°C)

Total energy consumption 5.45 kWh/24h (@ 30°C/55%RH)

Annual running cost \$597 p.a. (@ \$0.30/kWh)

ELECTRICAL

Electrical safety climate class 5 (40°C/40% RH)

2 × 400mm, 4W LED light (door activated) Interior lighting Power cord Supplied with 2.7m, 10 Amp plug and lead Power supply 220-240 Volts a.c. 50 Hz, single phase supply

Current draw 3.5 Amps (includes unit 2.2 Amps)

REFRIGERATION

Controller SCS Connect (SKOPE-connect compatible)

Connectivity interface Bluetooth® wireless technology

Side mounted, integral, removable refrigeration cartridge (part number Refrigeration system

ULQCNI-0030)

Refrigerant R290/90g (natural refrigerant)

Nominal capacity 900 Watts

Heat rejection (Avg/peak) 230 Watts/290 Watts No plumbing required Drainage

DIMENSIONS

Gross volume

External Internal 1140mm 605mm Height Width 1350mm 1800mm Depth 800mm 640mm Floor area 1.44m² Weight 212kg

523L

Height variation	,
Supplied castors	1140mm
Supplied height adjustable legs	n.a.
No castors	1005mm

Dimensional tolerances			
Before installing this cabinet allow the following dimensional tolerances:			
Linear dimensions Cabinet overall dimensions			
Less than 1 metre	±5mm		
More than 1 metre	-5mm to +10mm		
	Length of multiple cabinets		
	At each joint	At each end	
Less than 1 metre	±5mm	+15mm	
More than 1 metre	-5mm to +10mm	+15mm	

Ventilation requirements		
Тор	Not required	
Sides	Not required	
Back	Not required	
Bottom	Not required	

SKOPE INDUSTRIES LIMITEDAustralian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673 Email: skope@skope.com, Website: www.skope.com





