



Veva Nova

Asymmetrical Area Floodlight



EarthLight  TM
TRADE

Industrial & Commercial Lighting
earthlight.com.au

Veva Nova

Asymmetrical Area Floodlight


Introducing the Veva Nova Series LED Flood Lights – designed to deliver superior uniformity and minimal light spill with their advanced asymmetrical lighting distribution. Built with a rugged die-cast aluminium housing, equipped with external fins for optimal heat dissipation, these lights ensure lasting performance and reliability.

Available in seven different wattages, the Veva Nova Series caters to a wide array of applications, from construction sites and warehouses to sports centres and more. Whether illuminating mine site sheds, building exteriors, ports, or parks, these lights provide exceptional brightness and energy efficiency for any environment.

The Veva Nova series LED Flood Lights are the perfect blend of durability and efficiency, engineered to meet the demanding needs of Australian industrial and commercial settings.

**Die-cast
Aluminium Housing**

- ✓ Asymmetrical Lighting Distribution
- ✓ Reduced Unwanted Light Spill
- ✓ Die-Cast Aluminium Housing
- ✓ External Fins to Ensure Great Heat Dissipation
- ✓ Specially Designed Bracket For Easy And Quick Installation
- ✓ IP66 & IK08 Rated Weather and Impact Proof Makes it Ideal for Outdoor Use

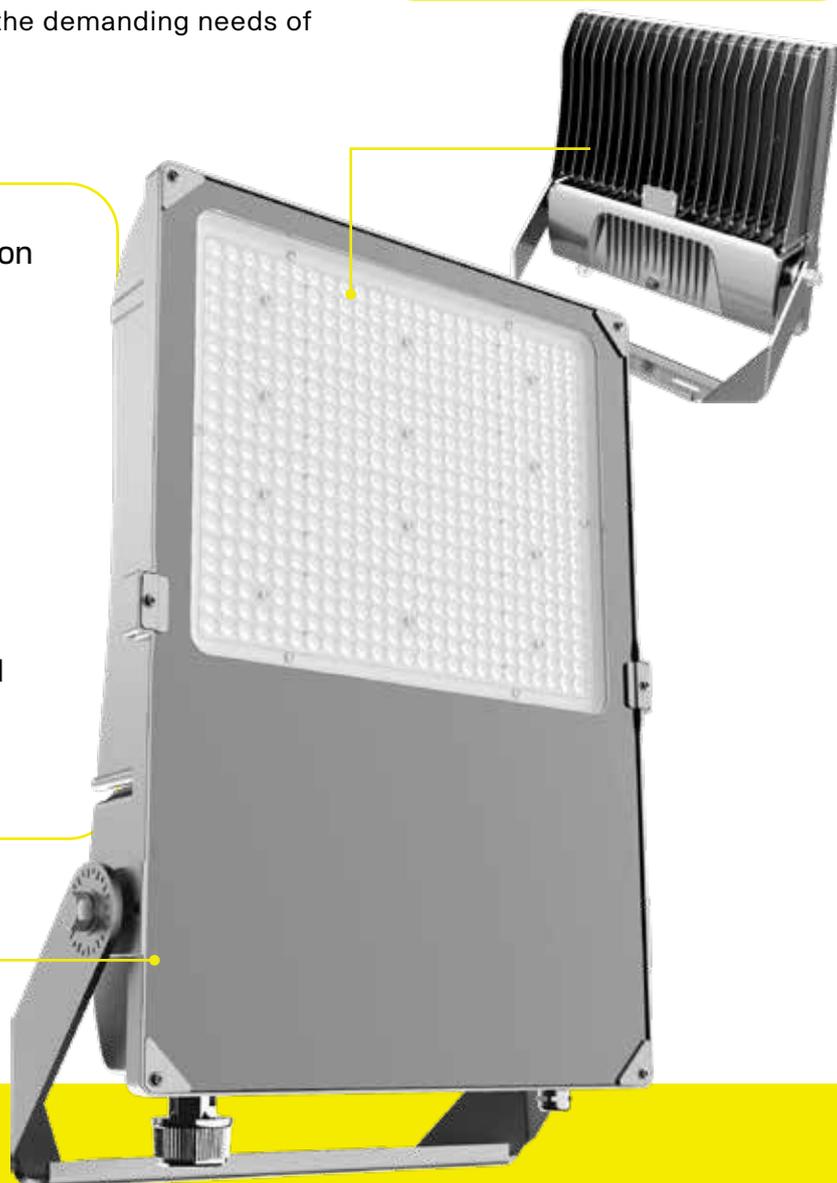

earthlight.com.au
1300 410 485
sales@earthlight.com.au

Veva Nova


Specifications

| CODE | ETG-02NV064 | ETG-02NV065 | ETG-02NV066 | ETG-02NV067 | ETG-02NV068 | ETG-02NV069 | ETG-02NV070 |
|-----------------------------|-------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|
| LED Power (W) | 50W | 100W | 150W | 200W | 300W | 400W | 500W |
| Luminous flux (lm) | 7,000 | 14,000 | 21,000 | 28,000 | 42,000 | 62,000 | 77,500 |
| Weight (Kg) | 1.8 | 2.8 | 3.9 | 5.3 | 8.1 | 11.5 | 12.5 |
| Luminance Efficiency (Lm/W) | 140 Lm/W | | | | | 155 Lm/W | |
| Input Voltage | 220-240VAC | | | | | 100-240VAC | |
| CCT | 4000K | | | | | | |
| Beam angle | 60° | | | | | | |
| Operating Temperature | 30°C to +50°C | | | | | | |
| IP Rating | IP66 | | | | | | |
| IK Rating | IK08 | | | | | | |
| Coating | Anti-Corrosive, Powder Coated | | | | | | |
| Warranty | 5 Years warranty | | | | | | |




Veva Nova


Dimensions

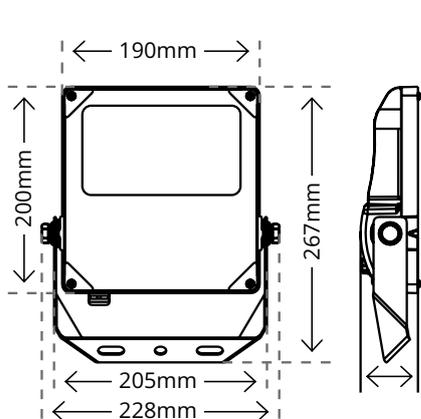


ETG-02NV064

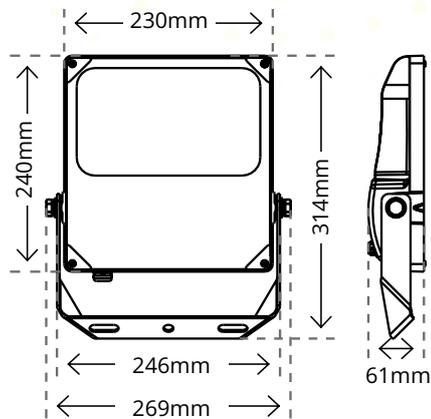


ETG-02NV065

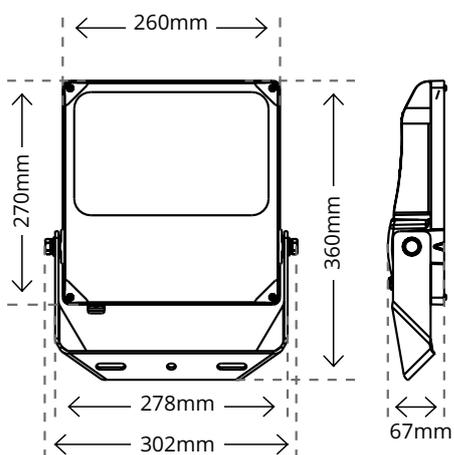


ETG-02NV066

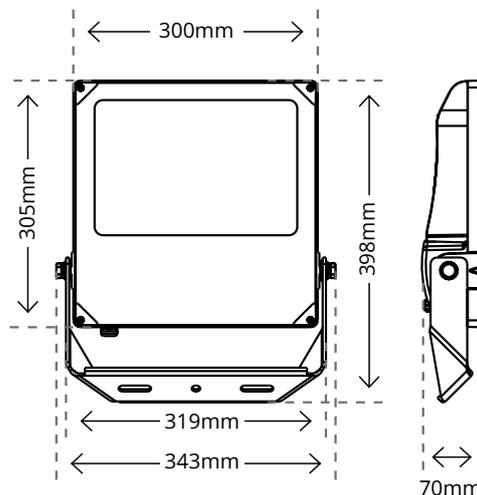

ETG-02NV067

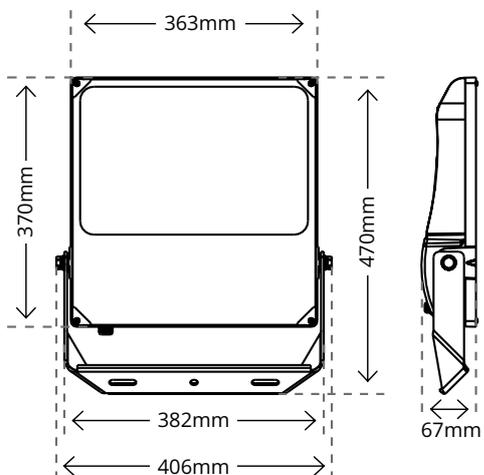

ETG-02NV068

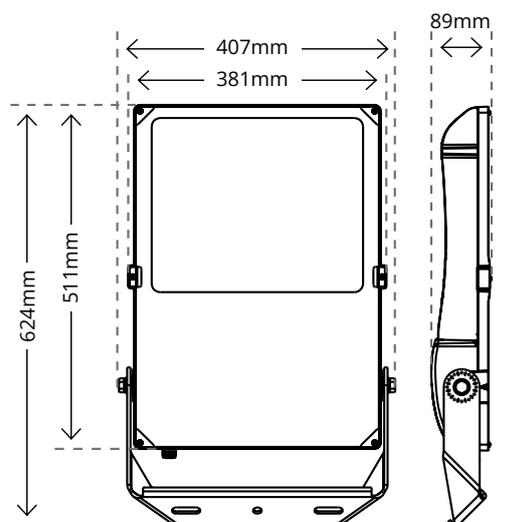

ETG-02NV069 | ETG-02NV070



EarthLight  TM
TRADE

Industrial & Commercial Lighting
EarthLight.com.au

ILLUMINATETM
BETTER