



OPTIONAL ACCESSORIES

FPM 456

Wheel clamping adaptor,allows clamping reverse mounted wheels,clutch center wheels and wheels with no center hole,through adjustable pin plate to be locked on standard clamping chuck.Pins on face plate are adjustable,according to shape,distance and number of lug holes on wheel.  
Different shape and length axtra pins available on demand.



STANDARD FEATURES

Clamping range	10" - 34"
Max.Wheel Diameter	1200mm/47"
Max. Wheel Width	406mm/16"
Power Supply	220V - 1ph
Motor Power	0.75kW
Max. Spindle Torque	1200nM
Rotating Speed	7 - 16 rpm
Working Pressure	10bar(145Psi)
Bead Breaker Force	12037N
Inflating Pressure Limiting Device	3.5bar/50psi
Net Weight	375kg
Overall Dimension	1185 x 1960 x 2120

T RAY



T RAY

GIULIANO AUTOMOTIVE EQUIPMENT



GIULIANO GROUP S.p.A.

Via Guerrieri,6-42015 CORREGGIO (RE) ITALY  
Tel.+39 0522 731111 - Telefax +39 0522 633109  
E-mail:info@giuliano.cn  
Website:www.giuliano-automotive.com





## LEVER



## NO LEVER



## LNL SYSTEM

LEVER NO-LEVER TOUCHLESS TOOLHEAD (Patented)

The patented LeverLess system allows to control the lifting of the bead by step, preventing damages to the tyre, tool head with replaceable nylon inserts to protect alloy rims




## Motor Inverter

Drive your tyre changer

# T RAY

## Floating Disc Support

It is possible to unlock the disc support and enable a "Floating Movement", and change the angle of the disc, increasing its depth inside the rim. Particularly effective with soft tyre.

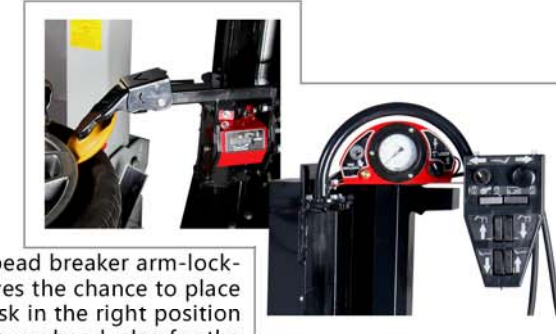

The mechanical bead breaker arm-locking system gives the chance to place the arm with disc in the right position to loosen the lower bead, also for the next same size wheel as well



## Floating Disc Support

It is possible to unlock the disc support and enable a "Floating Movement", and change the angle of the disc, increasing its depth inside the rim. Particularly effective with soft tyre.



## Reversible Arm

the upper bead breaking arm can be easily reversed, allowing the use of the disc to demount the lower bead even while using the reverse rim flange.

## Smart Lock

Smart-Lock (Giuliano patent) is basically the fastest wheel clamping system in the world!. Insert the Smart-Lock the chuck and lift the knob, less than 2 sec to have a perfect locking of the rim. Fast and reliable, the "expanding nut" can be easily calibrated.



## Press Arm

PNEUMATIC POWERED ASSIST ARM

Simple control switch activates double acting powerful air cylinder, speeds and eases demounting & mounting the toughest rim and tyre combinations



## TYRE LIFT

WHEEL LIFTING UNIT WITH ROLLER BOARD integrated pneumatic lifter raises the wheel safely by smooth hands free foot pedal control

