


Product Advantages:

- Made of food quality stainless steel.
- Rock wool insulation, 70 mm thick for walls and 45 mm thick for the door.
- Inside entirely radiused, with press-drawn sliders and base.
- Door with removable seal opens 270°.
- Carrying handles on sides and back.
- Wheels Ø 160 mm with stainless steel cover, 2 with brakes.
- Circumferential bumper.
- Electronic control thermostat with digital display (range from 60 to 85°C).
- Even heating by means of shielded heating element and centrifugal fan.
- Spiral power cable 3G1.5 with moulded plug + plug support.

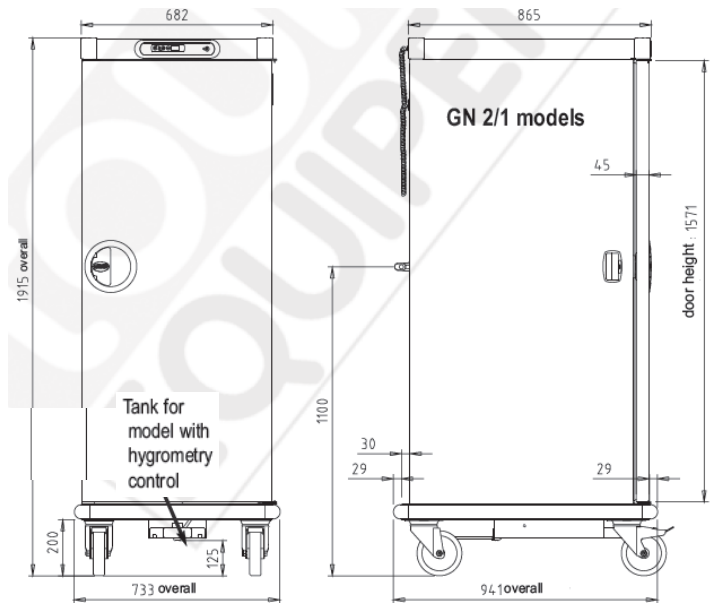

Hygrometry Control:

- Hygrometry controlled by 5 pre-set cycles in the elec. control thermostat.
- Removable rotomoulded tank, capacity 2 litres, accessible from the front.



Technical Data:

| | |
|-----------------------|---|
| Reference | 507 486 |
| Loading | 20 GN2/1 containers h. 65 mm Or 40 GN1/1 containers h. 65 mm |
| Space between sliders | 71 mm |
| External dimensions | 733 x 941 x 1915 mm |
| Internal dimensions | 535 x 710 x 1460 mm |
| External volume | 1.296 m ³ |
| Internal volume | 0.555 m ³ |
| Weight when empty | 135 kg |
| Connected load | 2.0 kW - 240 1 phase AC 1 x 10 A |
| Max. current (A) | 9.1 |
| Power consumption | 0.78 kwh |
| Protection index | 25 |
| Standards | NF EN 60335-1 NF EN 60335-2-49 |