

COMMERCIAL WASHER/DRYER STACK

10kg Washer

10kg Dryer

Programmable

Washer booster heating available



FEATURES STACK UNITS

- Totally freestanding: can be installed on any floor and any level
- Reduced floor space
- Top, front and side panels standard available in anthracite grey
- Door opens 180° for easy loading and unloading
- LED indication of the status of the program
- Time remaining countdown

FEATURES WASHER EXTRACTORS

- Stainless steel outer and inner drum
- Industry-leading 440 G-Force extraction removes more moisture, minimising drying times and utility costs
- Suspension with new out-of-balance logic
- Soap box with four compartments
- Standard with drain pump, drain valve optionally available
- Electrical heating or boiler-fed
- Auto chemical feed option included

FEATURES DRYERS

- Galvanised steel cylinder
- Oversized lint filter located in front for easy cleaning
- Powerful exhaust blower assures short drying times and low operating costs
- Electrical or gas heating
- LED indication of the status of the program



STAKED UNIT




EASY OPERATION

TYPE		WASHER
CAPACITY	kg	10
DRUM VOLUME	l	96,8
MOTOR		
Frequency controlled	kW	0,67
EXTRACTION SPEED	rpm	1200
G-FACTOR		440
ELECTRICAL CONNECTION		
		1x220-240V 50Hz 3x220-240V 50Hz 3x380-415V+N 50 Hz
ELECTRICAL HEATING	kW	4,8
DRAIN		
Pump		standard
Drain valve		available

TYPE		DRYER
CAPACITY	kg	10
DRUM VOLUME	l	198
ELECTRICAL CONNECTION		
		1x220-240V 50/60Hz 3x220-240V 50Hz 3x380-415V+N 50 Hz
ELECTRICAL HEATING		
	kW	5,2 (230V) 5,3 (400V)
GAS HEATING	kW	7,3
MOTOR POWER	kW	0,25

TYPE		NT3JG
MODEL		
		washer/dryer
DIMENSIONS HxWxD		
	mm	1986x683x704
Net weight	kg	177
TRANSPORT DATA		
Volume (packed)	m ³	1,25
Packed HxWxD	mm	2032x760x860
Gross weight	kg	193

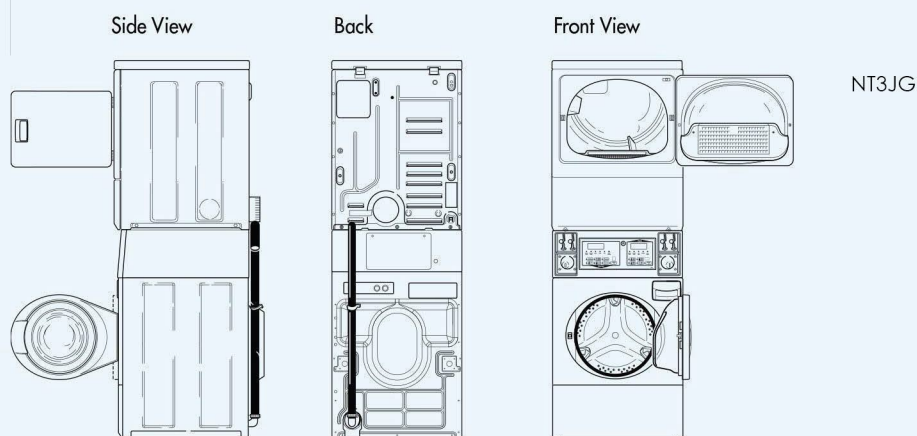

The Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.primuslaundry.com

