

ECO-EFFICIENT, HYDRO-CARBON REFRIGERATION AVAILABLE AS STANDARD FROM SEPTEMBER 2019

Overview


Chilled display Units incorporating a cold well, the unique Versigen innovative "Polar Air Stream" system provides a constant wall of cold air which moves across the well blanketing the food displayed and recirculates back through the system. Holding pre-chilled food at a safe and regulated temperature. Retaining taste and freshness throughout, perfect for fruit and vegetables, salads, and cold drinks. Self-contained units with accurate digital control, automatic defrost, high pressure warning, and automatic condensate evaporation. The Refrigeration System is housed underneath in a tidy compact cradle. LED illumination from above. Utilising a highly efficient, naturally occurring hydrocarbon refrigeration **gas type R290 (as standard)**. Hermetically sealed, reducing the carbon footprint and energy consumption.




Features:

- Condensing unit set at 90° angle. Removes the need for unsightly vents in the front panels of serveries and counters.
- Accommodates 60mm deep 1/1 Gn pans [not supplied]
- Digital thermostat and temperature control
- Advanced air flow design with unique polar airstream technology
- Efficient, eco-friendly, refrigeration
- Long life, low energy LED
- Maintaining the core product temperature of pre-chilled food below 5°C in ambient condition not exceeding 25°C and 60% relative humidity
- Automatic condensate water evaporation [no need to empty drip trays]
- Automatic defrost control
- 24 hour operation
- Fully insulated
- Supplied with 2m long power cord and 10amp plug [10A 230v 50Hz]
- Plenum duct to aid onsite ventilation and installation

Cut-Out Dimensions:

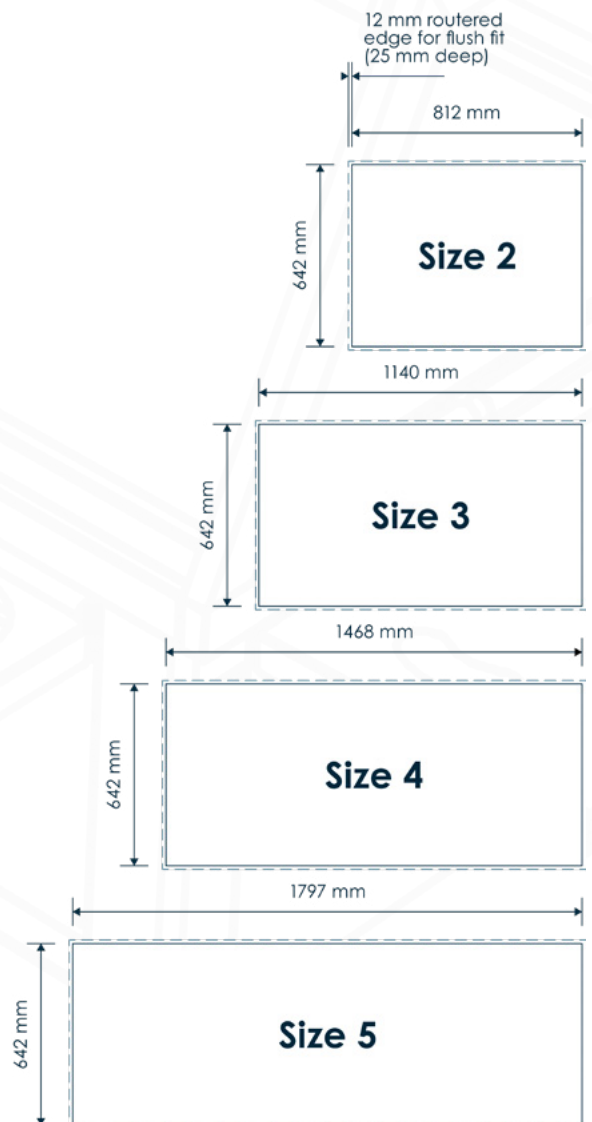



Cleverly engineered Polar Air Stream System provides a constant cold air envelope.

innovation

Options:

- Double sided Island Glass Curved or Shear line type
- Additional air flow kit [In-line fan and flexi-duct kit for difficult non-standard installations] (Code: DRAF)
- Gastronorm adaptor 3 x 1/3 Gn Size (Code: DGPA)
- Prep-shelf and cutting board (Codes: D2PS, D3PS, D4PS & D5PS) for Deli models only
- Rear sliding doors (Codes: D2DD, D3DD, D4DD & D5DD) Deli models only

Code: DRAF



	Model	Weight (kg)	L x W (mm)	Height above display top	GN 1/1 Capacity	No. of 220w lamps	Electrical Supply	Power Rating (kw)	
1. No Gantry	D2RWNG	67	830 x 660	25	2	N/A	10amp	1.0	
	D3RWNG	76	1158 x 660	25	3	N/A	10amp	1.5	
	D4RWNG	85	1486 x 660	25	4	N/A	10amp	1.5	
	D5RWNG	93	1814 x 660	25	5	N/A	10amp	2.0	
2. Curved Glass Open Front	D2RW	74	830 x 660	408	2	2	10amp	1.0	
	D3RW	85	1158 x 660	408	3	3	10amp	1.5	
	D4RW	95	1486 x 660	408	4	4	10amp	1.5	
	D5RW	105	1814 x 660	408	5	5	10amp	2.0	
(+ "I" to end of model code for island model with double sided, curved glass screen)									
3. Curved Glass Closed Front	D2RWF	82	830 x 660	408	2	2	10amp	1.0	
	D3RWF	94	1158 x 660	408	3	3	10amp	1.5	
	D4RWF	105	1486 x 660	408	4	4	10amp	1.5	
	D5RWF	116	1814 x 660	408	5	5	10amp	2.0	
4. Square Glass Open Front	D2RWSL	74	830 x 660	396	2	2	10amp	1.0	
	D3RWSL	85	1158 x 660	396	3	3	10amp	1.5	
	D4RWSL	95	1486 x 660	396	4	4	10amp	1.5	
	D5RWSL	105	1814 x 660	396	5	5	10amp	2.0	
(+ "I" to end of model code for island model with double sided, square glass screen)									
5. Square Glass Closed Front	D2RWSLF	82	830 x 660	396	2	2	10amp	1.0	
	D3RWSLF	94	1158 x 660	396	3	3	10amp	1.5	
	D4RWSLF	105	1486 x 660	396	4	4	10amp	1.5	
	D5RWSLF	116	1814 x 660	396	5	5	10amp	2.0	
6. Curved Glass Deli (shelf not heated)	D2RWD	78	830 x 660	540	2	2	10amp	1.0	
	D3RWD	91	1158 x 660	540	3	3	10amp	1.5	
	D4RWD	102	1486 x 660	540	4	4	10amp	1.5	
	D5RWD	115	1814 x 660	540	5	5	10amp	2.0	
7. Square Glass Deli (shelf not heated)	D2RWDSL	82	830 x 660	540	2	2	10amp	1.0	
	D3RWDSL	94	1158 x 660	540	3	3	10amp	1.5	
	D4RWDSL	105	1486 x 660	540	4	4	10amp	1.5	
	D5RWDSL	117	1814 x 660	540	5	5	10amp	2.0	

