

# Stacked Washer-Extractor/Tumble Dryer



PSA30 - PSA50

PSA  
RANGE



## FEATURES


- Ideal for limited space settings
- Increases wash capacity
- Improves throughput
- Minimal front fasteners give quick access to key washer-extractor components to improve serviceability
- Supports a higher volume than typical retail and light commercial products are able to support
- More than double production with higher capacity and faster wash times
- Reliability and durability that drastically outperforms retail or light commercial options

## Maximize Time and Space

PRIMUS stacked washer-extractor/tumble dryer is a unique product that truly delivers increased productivity. Featuring the Xtronic Touch Control.

## PLATFORM: XCONTROLFLEX

- Available with XControl FLEX
- 7" (5" on stack tumbler dryers), full color, touch screen display
- Clear step-by-step instructions available in 34 languages
- Machine programming & performance data accessible through cloud. Remotely access to live machine data on mobile device
- VEND:
  - » 5 standard dry programmes (High, Medium, Low, Delicate, No Heat)
  - » 11 easy-to-use cycle modifier
- Count up timer
- Over-the-air updates

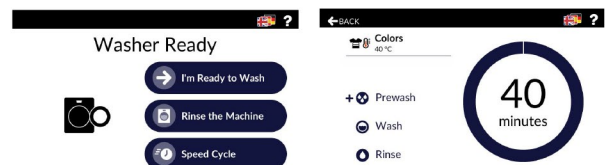

## Stacked Washer-Extractor/Tumble Dryer

### Specifications

		PSA30		PSA50	
		Washer-Extractor	Tumble Dryer	Washer-Extractor	Tumble Dryer
Control Option		XControl FLEX		XControl FLEX	
Capacity - kg		15 x 2		25 x 2	
Overall Width - in (mm)		31.4 (797)		34.4 (875)	
Overall Depth - in (mm)		45.5 (1152)		51.3 (1302)	
Overall Height - in (mm)		79.7 (2023)		84.3 (2141)	
Cylinder Diameter - in (mm)		24.0 (610)	30.0 (762)	26.3 (668)	33.0 (838)
Cylinder Depth - in (mm)		16.0 (406)	26.0 (660)	20.3 (515)	30.0 (762)
Cylinder Volume - cu. ft (liters)		4.2 (119)	10.6 (300)	6.3 (178)	14.8 (419)
Reversing Cylinder		–	Standard	–	Standard
Door Opening Size - in (mm)		14.3 (363)	22.6 (574)	16.3 (414)	26.9 (683)
Door Bottom to Floor - in (mm)		14.0 (356)	51.3 (1303)	14.6 (370)	52.3 (1328)
Water Inlet Connection - in (mm)		2 x 0.75 (19)	–	2 x 0.75 (19)	–
Drain Diameter - in (mm)		1 x 3 (76)	–	1 x 3 (76)	–
Drain Height to Floor - in (mm)		4.3 (108)	–	4.5 (115)	–
Heat Input Power - Btu/hr (kW, Mj/hr.)		– 73,000 (21.4, 77.0)		–	95,000 (27.8, 100)
Gas Connection - in		–	1/2 NPT	–	1/2 NPT
Air Outlet - in (mm)		–	8.0 (200) Elliptical	–	10.0 (250) Elliptical
Airflow - cfm (l/sec)		–	400 (190)	–	600 (285)
Motor - HP (kW)		Fan	–	–	0.5 (0.4)
		Drive	1 (0.75)	2 (1.5)	0.5 (0.4)
Total # of Speeds		6	–	6	–
Cylinder Speeds - RPM (G-Force)		Gentle	34 (0.4)	–	33 (0.4)
		Wash	48 (0.8)	–	46 (0.8)
		Distribution	86 (2.5)	–	82 (2.5)
		Very Low	282 (27)	–	269 (27)
		Low	485 (80)	–	464 (80)
		Medium	542 (100)	–	518 (100)
Electrical Specs - amps	Gas X	200-240V/50/60/1/3	15	10	15
Shipping Dimensions Approx. - in (mm)		Width	34.5 (876)	–	35.5 (902)
		Depth	47.0 (1194)	–	54.0 (1372)
		Height	83.0 (2108)	–	89.0 (2261)
Net Weight - lb (kg)		770 (349)		910 (413)	
Shipping Weight - lb (kg)		787 (357)		930 (422)	
Agency Approvals		CSA/UL/AGA/KTL/TISI		CSA/UL/AGA/KTL/TISI	



CALL US ON 1300 355 769  
VISIT OUR WEBSITE [www.totalce.com.au](http://www.totalce.com.au)