


'P' Burner Dimensions

LEADING DIMENSIONS

Flame Tube projection
STD lengths: **240, 340, 430 & 610**
Other sizes available on request

Note:

Standard burner arrangement as shown – alternative arrangements are available for specific requirements.

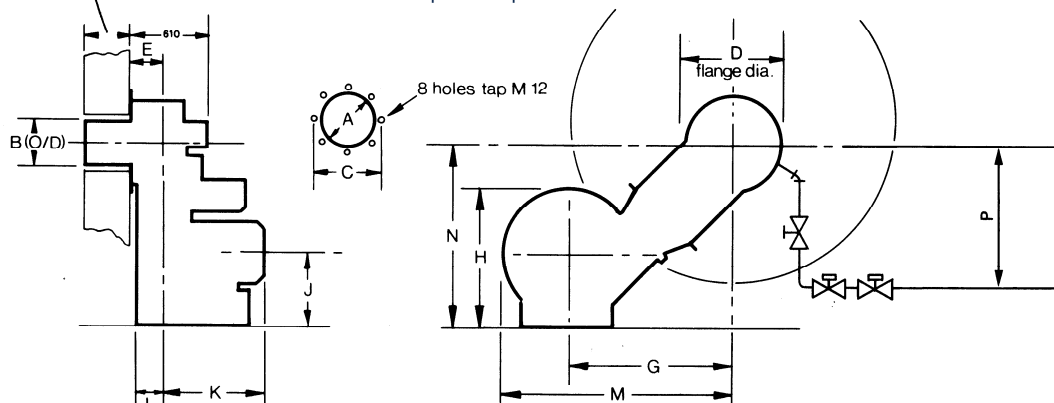

Burner		A	B	C	D	E	G	H	J	K	L	M	N	P	Burner	A	B	Burner	A	B
PDF160/	3.7	375	334	610	660	276	965	855	500	640	195	1395	1025	900	PO160/	375	334	PG160/	375	334
	4.0	375	334	610	660	276	965	855	500	640	195	1395	1025	900		375	334		375	334
	4.4	375	334	610	660	276	965	855	500	640	195	1395	1025	900		375	334		375	334
	4.8	375	334	610	662	276	965	/55	500	640	195	1395	1025	900		375	334		375	334
PDF250/	5.1	375	334	672	724	304	925	855	475	640	195	1355	1025	900	PO250/	375	334	PG250/	400	359
	5.5	375	334	672	724	304	925	855	475	640	195	1355	1025	900		375	334		400	359
	6.0	375	334	672	724	304	925	/55	475	640	195	1355	1025	900		375	334		400	359
	6.2	400	359	672	724	304	925	855	475	640	195	1355	1025	900		400	359		400	359
	6.6	400	359	672	724	304	925	855	475	640	195	1355	1025	900		400	359		400	359
	7.0	400	359	672	724	304	1070	915	495	660	215	1520	1165	900		400	359		400	359
	7.3	400	359	672	724	304	1070	915	495	660	215	1520	1165	900		400	359		400	359
PDF310/	7.7	425	385	672	724	334	1076	920	495	660	215	1526	1275	900	PO310/	425	385	PG310/	450	410
	8.0	425	385	672	724	334	1076	920	495	660	215	1526	1275	900		425	385		450	410
	8.4	425	385	672	724	334	1076	920	495	660	220	1526	1275	900		425	385		450	410
	8.8	425	385	672	724	334	1165	1110	660	665	220	1640	1400	900		425	385		450	410
	9.2	425	385	672	724	334	1165	1110	660	665	260	1640	1400	900		425	385		450	410
PDF400/	9.5	450	410	672	724	334	1155	1115	660	805	260	1635	1410	975	PO400/	450	410	PG400/	450	410
	9.9	450	410	672	724	334	1155	1115	660	805	260	1635	1410	975		450	410		450	410
	10.3	450	410	672	724	334	1155	1115	660	805	260	1635	1410	975		450	410		450	410
	10.6	450	410	672	724	334	1155	1115	660	805	260	1635	1410	975		450	410		450	410
	11.0	450	410	672	724	334	1155	1115	660	805	260	1635	1410	975		450	410		450	410
	11.4	450	410	672	724	334	1155	1115	660	805	260	1635	1410	975		450	410		450	410
	11.7	450	410	672	724	334	1155	1115	660	805	260	1635	1410	975		450	410		450	410
PDF490/	12.1	475	436	672	724	334	1155	1115	660	805	260	1635	1410	975	PO490/	450	410	PG490/	475	436
	12.5	475	436	672	724	334	1155	1115	660	805	260	1635	1410	975		450	410		475	436
	12.8	475	436	672	724	334	1205	1205	710	800	235	1735	1400	975		450	410		475	436
	13.2	475	436	672	724	334	1205	1205	710	800	235	1735	1400	975		475	436		475	436
	13.6	475	436	672	724	334	1205	1205	710	800	235	1735	1400	975		475	436		475	436
	13.9	475	436	672	724	334	1205	1205	710	800	235	1735	1400	975		475	436		475	436
	14.3	475	436	672	724	334	1205	1208	710	800	235	1735	1400	975		475	436		475	436
PDF/ PO/PG 575/660	Available on application																			

Enertech Limited, P O Box 1, Vines Lane
Droitwich, Worcestershire, WR9 8NA

tel: +44 (0) 1905 794331 • fax: +44 (0) 1905 794017
email: info@nu-way.co.uk • web: www.nu-way.co.uk