


## SC430N

Bottom Mount, 1 Door (Glass), Upright Fridge

Project: \_\_\_\_\_

Item No: \_\_\_\_\_

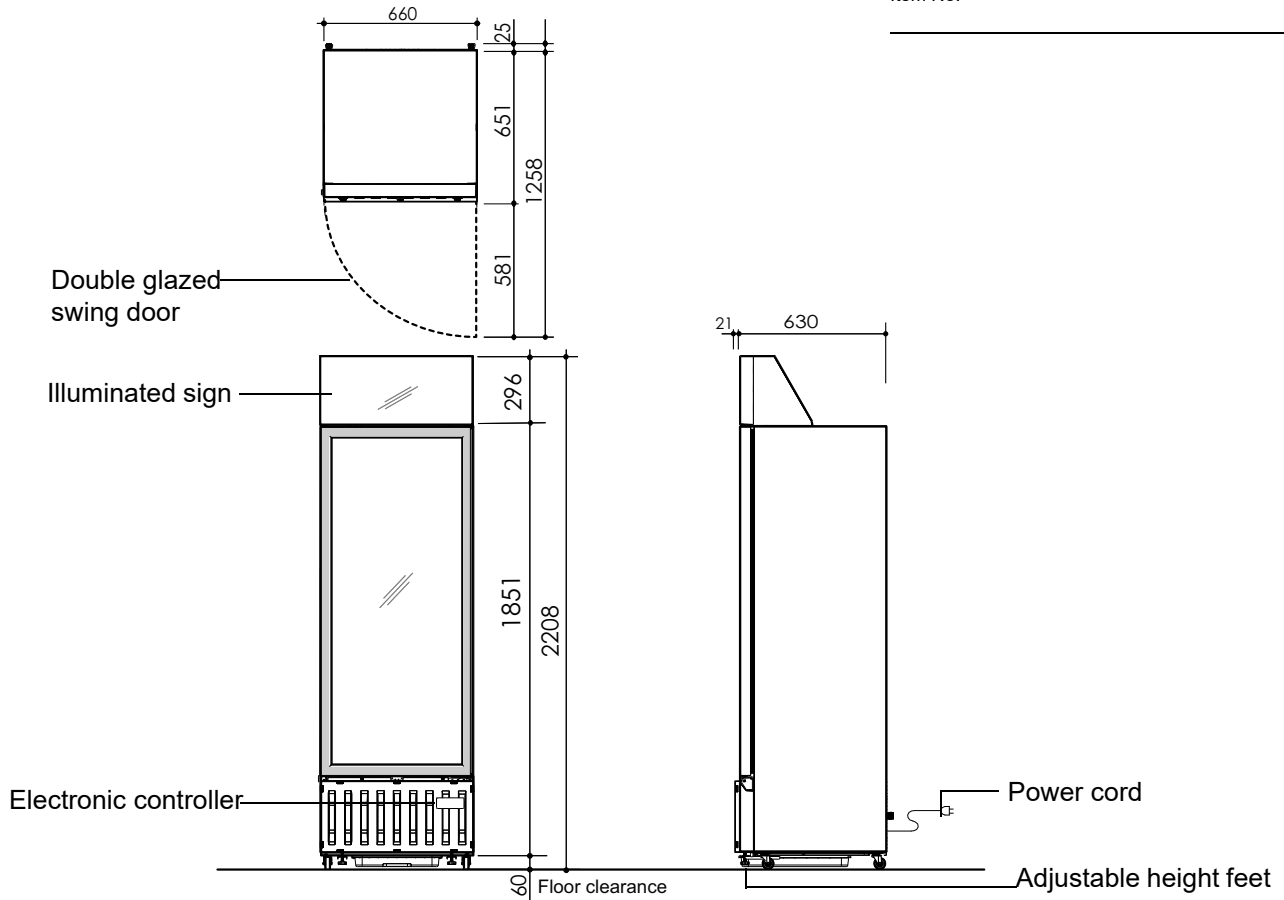

<b>CABINET</b>	
Doors	1 × self-closing, double glazed, Argon filled, toughened safety glass swing doors (hinged RH)
Internal door opening	1 × door opening: 1505mm high × 655mm wide
Shelves	5 × adjustable height, full width wire shelves: 560mm wide × 410mm deep
Sign	Illuminated sign
Material	Powder-coat galvanized steel
<b>PERFORMANCE</b>	
Max. ambient temp.	35°C
Temperature range	0 °C to 5 °C
Noise measurement	65 dB (A)
GEMS rating class	M1
GEMS energy consumption	2.74 kWh/24h
GEMS annual running cost	\$300 p.a. (@ \$0.30/kWh)
<b>ELECTRICAL</b>	
Electrical safety climate class	5
Interior lighting	1×7W switched LED strip lighting
Sign lighting	1×11W switched LED strip lighting
Power cord	Supplied with 1.7m, 10 Amp plug and lead
Power supply	220-240 Volts a.c. 50 Hz, single phase supply
Current draw	2.3 Amps
<b>REFRIGERATION</b>	
Controller	Electronic controller with digital temperature display
Refrigeration system	Bottom mounted split refrigeration system
Refrigerant	R290 / 45g (natural refrigerant)
Nominal capacity	320 Watts
Heat rejection (Avg/peak)	115 Watts/140 Watts
Drainage	No plumbing required

<b>DIMENSIONS</b>		
Height	External 2208mm*	Internal 1430mm
Width	660mm	570mm
Depth	630mm	525mm
Floor area	0.429m <sup>2</sup>	
Weight	112kg	
Gross volume	420 litres	

\*Height 2208mm includes castors.

<b>Dimensional tolerances</b>		
Before installing this cabinet allow the following dimensional tolerances:		
<b>Linear dimensions</b>	<b>Overall cabinet dimensions</b>	
Less than 1 metre	±5mm	
More than 1 metre	-5mm to +10mm	
	<b>Length of multiple cabinets</b>	
	<b>At each joint</b>	<b>At each end wall</b>
Less than 1 metre	±5mm	+15mm
More than 1 metre	-5mm to +10mm	+15mm

<b>Ventilation requirements</b>	
Top	Not required
Sides	Not required
Back	100mm
Bottom	Not required